



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




# PC-XXX-LLC-CZ / PC-XXX-LLC-GM SERIES

## Liquid level control




### Wiring Diagram

TYPICAL WIRING DIAGRAM FOR PC-XXX-LLC-CZ

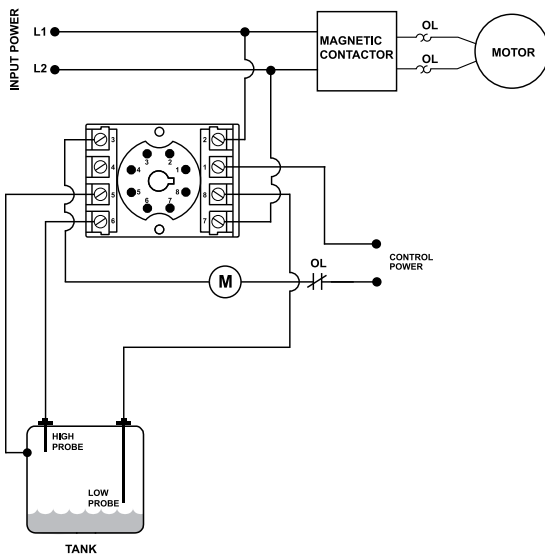

TYPICAL WIRING DIAGRAM FOR PC-XXX-LLC-GM

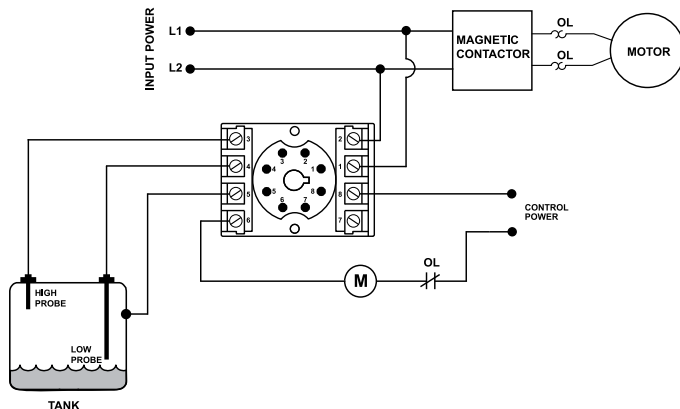

### Description

The PC-xxx-LLC-CZ and PC-xxx-LLC-GM Series are liquid level control relays used to control conductive liquid pumping operations in a pump-up or pump-down application. The units come in two different voltage ranges (see specs below).

The units have an adjustable sensitivity knob (4.7k to 100k ohms) that is set according to the resistance level at which you want the probes (sold separately) to sense the conductive liquid. The units have a built-in debounce time delay that prevents the relay from energizing if the probe resistance momentarily goes above or below the sensitivity setpoint (due to liquid splashing in the tank).

The units operate their internal relay based on inputs from a high and low probe and a common reference (when a conductive tank is used) or common probe (when a non-conductive tank is used).

#### PC-xxx-LLC-CZ

- Compatible with Crouzet's PNR & PNRU series liquid level control

#### PC-xxx-LLC-GM

- Compatible with Gems' Series 16M general purpose control

#### Must use Model OT08PC or P1011-6 socket for UL Rating!

Note: Manufacturer's recommended screw terminal torque for the OT Series Octal Sockets is 12 in.-lbs.

### Features & Benefits

FEATURES	BENEFITS
<b>Debounce time delay (2 seconds)</b>	Prevents rapid cycling of the pump due to turbulence in the tank
<b>Adjustable sensitivity (4.7 to 100Kohms)</b>	Allows user to fine tune the sensing resistance to prevent false tripping due to foam or debris
<b>Dual probe design (plus a common)</b>	Allows user the ability to set the level differential required

### Ordering Information

MODEL	LINE VOLTAGE	DESCRIPTION
PC-100-LLC-CZ	95-120VAC	Compatible with Crouzet's PNR & PNRU Series liquid level control
PC-200-LLC-CZ	190-240VAC	Compatible with Crouzet's PNR & PNRU Series liquid level control
PC-100-LLC-GM	95-120VAC	Compatible with Gems' Series 16M liquid level control
PC-200-LLC-GM	190-240VAC	Compatible with Gems' Series 16M liquid level control

## PC-XXX-LLC-CZ / PC-XXX-LLC-GM SERIES

### Accessories



#### OT08PC 8-pin Octal Socket

Octal Socket for plug-in units. 8-pin surface & DIN rail mountable. Rated for 10A @ 600VAC.

### Specifications

#### Input Characteristics

##### Supply Voltage

**PC-100-LLC-CZ** 95-120VAC

**PC-100-LLC-GM** 95-120VAC

**PC-200-LLC-CZ** 190-240VAC

**PC-200-LLC-GM** 190-240VAC

**Frequency** 50/60Hz

#### Functional Characteristics

**Probe Sense Voltage** 5VDC pulsed

**Debounce Time Delay** 2 seconds

**Probe Sensitivity** 4.7k to 100k Adjustable

#### Output Characteristics

##### Output Contact Rating

**Pilot Duty** 480VA @ 240VAC

**General Purpose** 10A @240VAC

### General Characteristics

**Temperature Range** -40° to 70°C (-40° to 158°F)

**Maximum Input Power** 5 W

#### Standards Passed

**Electrostatic Discharge (ESD)** IEC 61000-4-2, Level 3, 6kV contact, 8kV air.

**Radio Frequency Immunity (RFI)** 150MHz, 10V/m

**Fast Transients** IEC 61000-4-4, Level 3, 2kV input power and controls

### Safety Marks

**UL (OT08PC octal socket required)**

UL508 (File #E68520)

**CE**

IEC60947-6-2

### Dimensions

**H** 44.45 mm (1.75"); **W** 60.33 mm (2.375");

**D** 104.78 mm (4.125")

### Weight

0.65 lb. (10.4 oz., 294.84 g)

### Mounting Method

DIN rail or surface mount  
(plug into OT08PC socket)

### Socket Available

Model OT08PC (UL Rating 600V)

The 600V socket can be surface mounted or installed on DIN Rail.