



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



PCE-3028

LGA 1150 4th Generation Intel® Core™ i7/i5/i3
Half-size SHB with PCIe/VGA/DVI/Dual GbE LAN

NEW

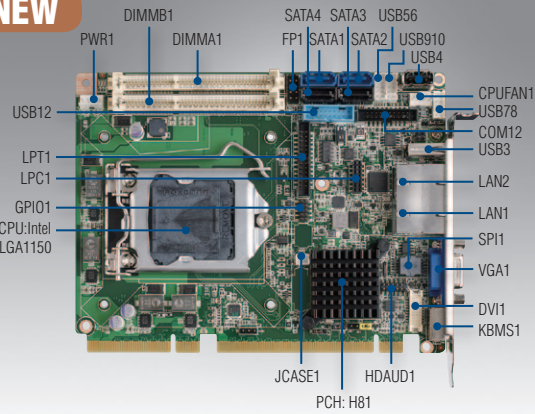

Features

- Complies with PICMG 1.3
- Supports Intel Core i7/i5/i3 LGA1150 processors with H81
- Dual Channel (Non-ECC) DDR3 1066/1333/1600 up to 16 GB
- Supports USB 3.0, SATA3.0
- Supports CRT and DVI-D (optional) display
- Support dual 10/100/1000 Mbps Ethernet
- Supports Advantech TPM module (LPC I/O)
- Supports SUSIAccess and Embedded Software APIs

Software APIs:



Watchdog



H/W Monitor



GPIO

Utilities:




Monitoring



Specifications

Processor System	CPU	i7-4790S	i7-4790T	i7-4770S	i7-4770TE	i5-4590S	i5-4590T	i5-4570S	i5-4570TE	i3-4360	i3-4350T	i3-4330	i3-4330TE	G3420	G3320TE	G1820	G1820TE	
	Base Frequency	3.2GHz	2.7GHz	3.1GHz	2.3GHz	3.0GHz	2.0GHz	2.9GHz	2.7GHz	3.7GHz	3.1GHz	3.5GHz	2.4GHz	3.2 GHz	2.3 GHz	2.7 GHz	2.2 GHz	
	L3 Cache	8MB	8MB	8MB	8MB	6MB	6MB	6MB	4MB	4MB	4MB	4MB	4MB	3MB	3MB	2MB	2MB	
	SKU/Chipset	Intel H81																
	BIOS	AMI 128Mbit SPI Flash																
Bus	PCI-Express	One x16 plus four x1 to backplane																
Memory	Technology	Dual channel (Non-ECC) DDR3 1066/1333/1600																
	Max. Cap.	16 GB (8 GB per DIMM)																
	Socket	DDR3 204-pin SO-DIMM x2																
Graphics	Controller	Chipset integrated Intel GT2 4600 or GT1 HD graphics (Depends on CPU support)																
	VRAM	Shared system memory is subject to OS																
	CRT	Supports resolution up to 1920 x 1200 pixel at 60Hz																
	DVI-D	Supports resolution up to 1920 x 1200 pixel at 60Hz																
	Dual Independent Display	VGA+DVI-D																
Ethernet	Interface	10/100/1000 Mbps																
	Controller	LAN 1: Intel I217V LAN 2: Intel I211AT																
	Connector with LED	RJ-45 x 2																
SATA	Max. Data Transfer Rate	SATA 3.0 x 2 (600 MB/sec), SATA 2.0 x 2 (300 MB/sec)																
Rear I/O	USB 2.0	1																
	Ethernet	2																
	VGA	1																
	PS/2	1 (PS/2 Y cable supports 1 x keyboard and 1 x mouse)																
Internal Connector	USB	Seven USB 2.0 (Pin-header x 6 + USB Type A x 1); Two USB 3.0 (Pin header)																
	SATA	4																
	DVI-D	1																
	COM	2																
	Parallel	1																
Watchdog Timer	GPIO	8-bit																
	Output	System reset																
Miscellaneous	Interval	Programmable 1-255 sec																
	Audio	Intel High Definition audio interface (required an audio extension module P/N: PCA-AUDIO-HDA1E)																
Power Requirement	Test Environment	Intel Core i7-4770S (3.1GHz), DDR3 1600 8GB*2																
	Voltage	12V	5V	3.3V	5VSB	-5V	-12V											
	Current	7.26	1.06	0.42	0	0	0											
Environment	Operating	Non-operating																
	Temperature/Humidity	0 ~ 60° C (32~140° F); Depends on CPU frequency and cooler solution										-40 ~ 85°C and 60° C @ 95% RH Non-Condensing						
Physical	Operating humidity:	40° C @ 85% RH Non-Condensing																
	Dimensions	167.64 mm x 126.39 mm (6.6" x 4.98")																

Board Diagram

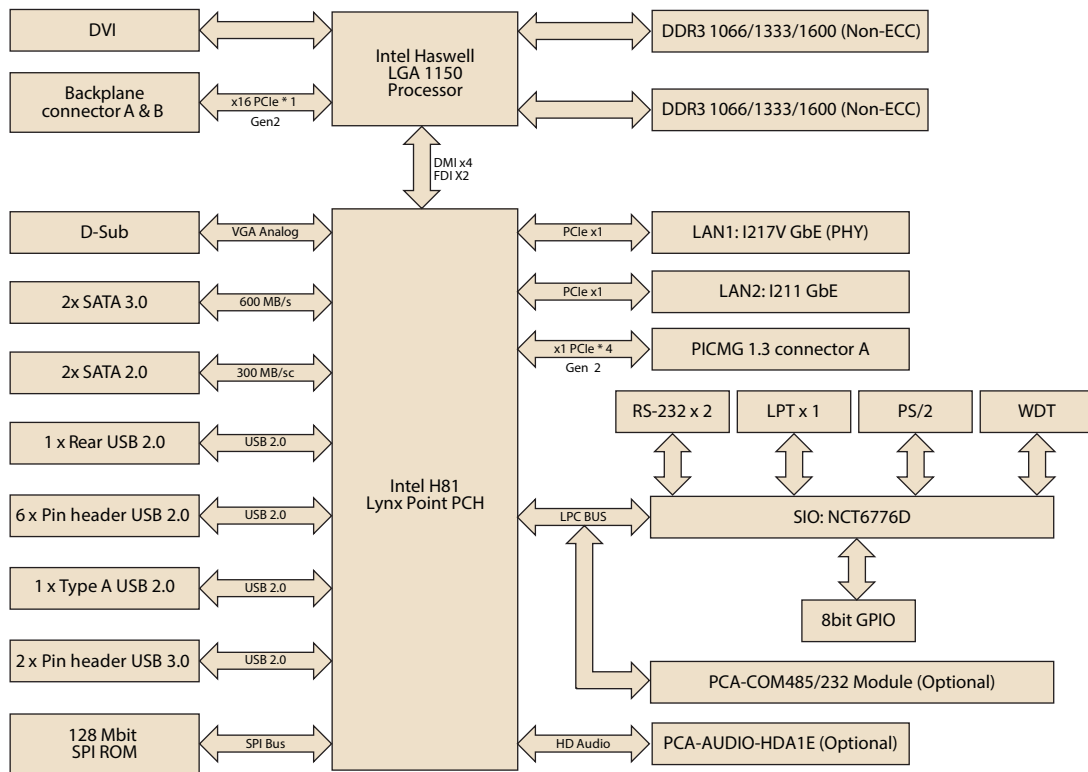

Ordering Information

Part Number	PCH	Memory	Backplane	LAN	VGA	DVI-D	COM	SATA III	SATA II	USB 2.0	USB 3.0	S/W Raid	AMT
PCE-3028G2-00A1E	H81	Non-ECC	PCE-3XXX	2	1	1	RS-232 x 2 onboard Optional RS-422/485 x 4 or RS-232 x 4 via module	2	2	8	2	No	No

Note: DVI-D cable is optional

Optional Accessories

Part Number	Description
PCA-COM485-00A1E	4 x RS-244/485 module
PCA-COM232-00A1E	4 x RS-232 module
PCA-AUDIO-HDA1E	Audio module
PCA-TPM-00A1E	TPM module(Trust Platform management)
1700021831-01	DP to DVI-D cable w/ BKT
1960047831N001	2U cooler for Intel Core i7-4770S, i7-4770TE, i5-4570S, i5-4570TE, i3-4330, i3-4330TE, G3420, G3220TE, G1820, G1820TE
1960053207N001	1.5 U cooler for Intel Core i7-4770S, i7-4770TE, i5-4570S, i5-4570TE, i3-4330, i3-4330TE, G3420, G3220TE, G1820, G1820TE
1960053065N001	1U blower for Intel Core i5-4570S, i5-4570TE, i3-4330, i3-4330TE, G3420, G3220TE, G1820, G1820TE

Packing List

Part Number	Description	Quantity
1700003194	Serial ATA HDD data cable	x1
1703150102	Serial ATA HDD power cable	x1
1700008762	2-port COM cable	x1
1700002223	1-port LPT cable	x1
1700060202	Keyboard and mouse Y-cable	x1
1700020277-01	2 ports USB 3.0 cable W/BKT	x1
1700014398	4-port USB cable kit	x1
1703040100	Power Converter	x1
9689000002	Jumper package	x1
2190000902	Warranty Card	x1
2006302800	Startup manual	x1
2066302800	Utility CD	x1

Bracket View

