



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# PCE-7129

## 6th Generation Intel® Xeon®/Core™ i7/ i5/i3/Pentium® LGA1151 System Host Board with DDR4, SATA 3.0, USB 3.0, M.2, Dual GbE, and Triple Displays

**NEW**

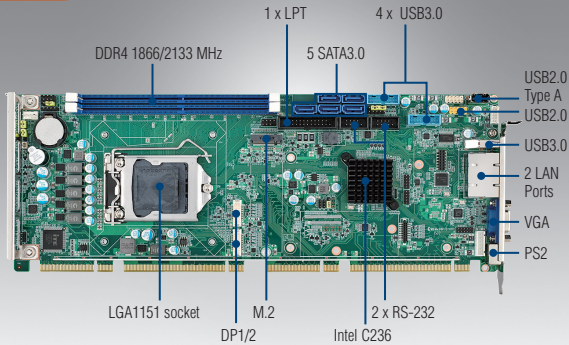

### Features

- Intel® Xeon® E3-1200v5/Core™ i7/i5/i3 LGA1151 processor with C236 chipset
- Up to 32 GB of dual-channel (non-ECC) DDR4 1866/2133 MHz
- PCIe 3.0, M.2, USB 3.0, SATA 3.0, and SW Raid 0, 1, 5, 10
- Supports CRT and 2 x DVI-D/DP display (with optional cable)
- Supports out-of-band remote management with AMT 11.0
- Supports Advantech's LPC modules, SUSIAccess, and embedded software APIs


Quiet

CE FCC

### Specifications

|                    | CPU                     | E3-1275v5  | E3-1225v5 | E3-1268Lv5 | i7-6700 | i7-6700TE | i5-6500 | i5-6500TE | i3-6100 | i3-6100TE | G4400  | G4400TE | G3900  | G3900TE |  |  |  |
|--------------------|-------------------------|--|-----------|------------|---------|-----------|---------|-----------|---------|-----------|--------|---------|--------|---------|--|--|--|
| Processor System   | Base Frequency          | 3.6GHz   | 3.3GHz    | 2.4GHz     | 3.4GHz  | 2.4GHz    | 3.2GHz  | 2.3GHz    | 3.7GHz  | 2.7GHz    | 3.3GHz | 2.9GHz  | 2.8GHz | 2.6GHz  |  |  |  |
|                    | L3 Cache                | 8MB  | 6MB       | 8MB        | 8MB     | 8MB       | 6MB     | 6MB       | 4MB     | 4MB       | 3MB    | 3MB     | 2MB    | 2MB     |  |  |  |
|                    | SKU/Chipset             | Intel® C236  |           |            |         |           |         |           |         |           |        |         |        |         |  |  |  |
|                    | BIOS                    | AMI® SPI Flash 128 Mbit  |           |            |         |           |         |           |         |           |        |         |        |         |  |  |  |
| Bus                | PCI-Express             | 1 x PCIe x16/2 x PCIe x8 and 1 x PCIe x4 to backplane  |           |            |         |           |         |           |         |           |        |         |        |         |  |  |  |
|                    | PCI                     | 4 x PCI master to backplane, 32-bit, 33 MHz  |           |            |         |           |         |           |         |           |        |         |        |         |  |  |  |
| Memory             | Technology              | Dual-channel (non-ECC) U-DIMM DDR4 1866/2133 MHz (supports x8 DDR4 1024 M) (Note: Intel ECC-supported processor must be selected to enable ECC function) |           |            |         |           |         |           |         |           |        |         |        |         |  |  |  |
|                    | Max. Capacity           | 32 GB (16 GB per DIMM)   |           |            |         |           |         |           |         |           |        |         |        |         |  |  |  |
|                    | Socket                  | 2 x DDR4 288-pin DIMM  |           |            |         |           |         |           |         |           |        |         |        |         |  |  |  |
| Graphics           | Controller              | Chipset integrated with Intel® HD Graphics   |           |            |         |           |         |           |         |           |        |         |        |         |  |  |  |
|                    | VRAM                    | Shared system memory is subject to OS  |           |            |         |           |         |           |         |           |        |         |        |         |  |  |  |
|                    | CRT                     | Supports resolutions of up to 1920 x 1200 pixel @ 60 MHz   |           |            |         |           |         |           |         |           |        |         |        |         |  |  |  |
|                    | DVI-D                   | Supports resolutions of up to 1920 x 1200 pixel @ 60 MHz   |           |            |         |           |         |           |         |           |        |         |        |         |  |  |  |
|                    | Display Port            | Supports resolutions of up to 1920 x 1080 pixel @ 60 Hz  |           |            |         |           |         |           |         |           |        |         |        |         |  |  |  |
| Triple Display     | CRT+DP/DVI-D+DP/DVI-D   |  |           |            |         |           |         |           |         |           |        |         |        |         |  |  |  |
| Ethernet           | Interface               | 10/100/1000 Mbps   |           |            |         |           |         |           |         |           |        |         |        |         |  |  |  |
|                    | Controller              | LAN 1: Intel® I219-LM<br>LAN 2: Intel® I210-AT   |           |            |         |           |         |           |         |           |        |         |        |         |  |  |  |
|                    | Connector with LED      | 2 x RJ45   |           |            |         |           |         |           |         |           |        |         |        |         |  |  |  |
| Rear I/O           | USB 3.0                 | 1  |           |            |         |           |         |           |         |           |        |         |        |         |  |  |  |
|                    | Ethernet                | 2  |           |            |         |           |         |           |         |           |        |         |        |         |  |  |  |
|                    | VGA                     | 1  |           |            |         |           |         |           |         |           |        |         |        |         |  |  |  |
|                    | PS/2                    | 1 (PS/2 Y cable supports 1 x keyboard and 1 x mouse)   |           |            |         |           |         |           |         |           |        |         |        |         |  |  |  |
| Internal Connector | USB                     | 7 x USB 2.0 (pin header*2 + USB Type A*1 + 4 on backplane)<br>4 x USB 3.0 (pin header)   |           |            |         |           |         |           |         |           |        |         |        |         |  |  |  |
|                    | SATA (SW Raid 0,1,5,10) | 5  |           |            |         |           |         |           |         |           |        |         |        |         |  |  |  |
|                    | M.2 (2280 Type M)       | 1 (supports SATA 3.0 or PCIe x4)   |           |            |         |           |         |           |         |           |        |         |        |         |  |  |  |
|                    | DP/DVI-D                | 2 (Pin header)   |           |            |         |           |         |           |         |           |        |         |        |         |  |  |  |
|                    | COM                     | 2  |           |            |         |           |         |           |         |           |        |         |        |         |  |  |  |
|                    | Parallel                | 1  |           |            |         |           |         |           |         |           |        |         |        |         |  |  |  |
|                    | IrDA                    | 1  |           |            |         |           |         |           |         |           |        |         |        |         |  |  |  |
| GPIO               | 8bit                    |  |           |            |         |           |         |           |         |           |        |         |        |         |  |  |  |
| Watchdog Timer     | Output                  | System reset   |           |            |         |           |         |           |         |           |        |         |        |         |  |  |  |
|                    | Interval                | Programmable 1-255 sec   |           |            |         |           |         |           |         |           |        |         |        |         |  |  |  |
| Miscellaneous      | Audio                   | Intel® High Definition audio interface (requires audio extension module PCA-AUDIO-HDB1E)   |           |            |         |           |         |           |         |           |        |         |        |         |  |  |  |
| Power Requirement  | Test Environment        | i7-6700, 3.4 GHz, 65 W, with 2 x 8-GB DDR4 2133  |           |            |         |           |         |           |         |           |        |         |        |         |  |  |  |
|                    | Voltage                 | +12V   |           |            |         | +5V       |         |           |         | +3.3V     |        |         |        | +5Vsb   |  |  |  |
|                    | Current                 | 2.64A  |           |            |         | 1.23A     |         |           |         | 0.19A     |        |         |        | 0.09A   |  |  |  |
| Environment        | Operating               | Non-Operating  |           |            |         |           |         |           |         |           |        |         |        |         |  |  |  |
|                    | Temperature             | 0 ~ 60 °C (dependent on CPU and cooler solution)   |           |            |         |           |         |           |         |           |        |         |        |         |  |  |  |
|                    | Humidity                | 40 °C @ 85% relative humidity (non-condensing)   |           |            |         |           |         |           |         |           |        |         |        |         |  |  |  |
| Physical           | Dimensions (L x W)      | 338 x 122 mm (13.3 x 4.8")   |           |            |         |           |         |           |         |           |        |         |        |         |  |  |  |

## Block Diagram

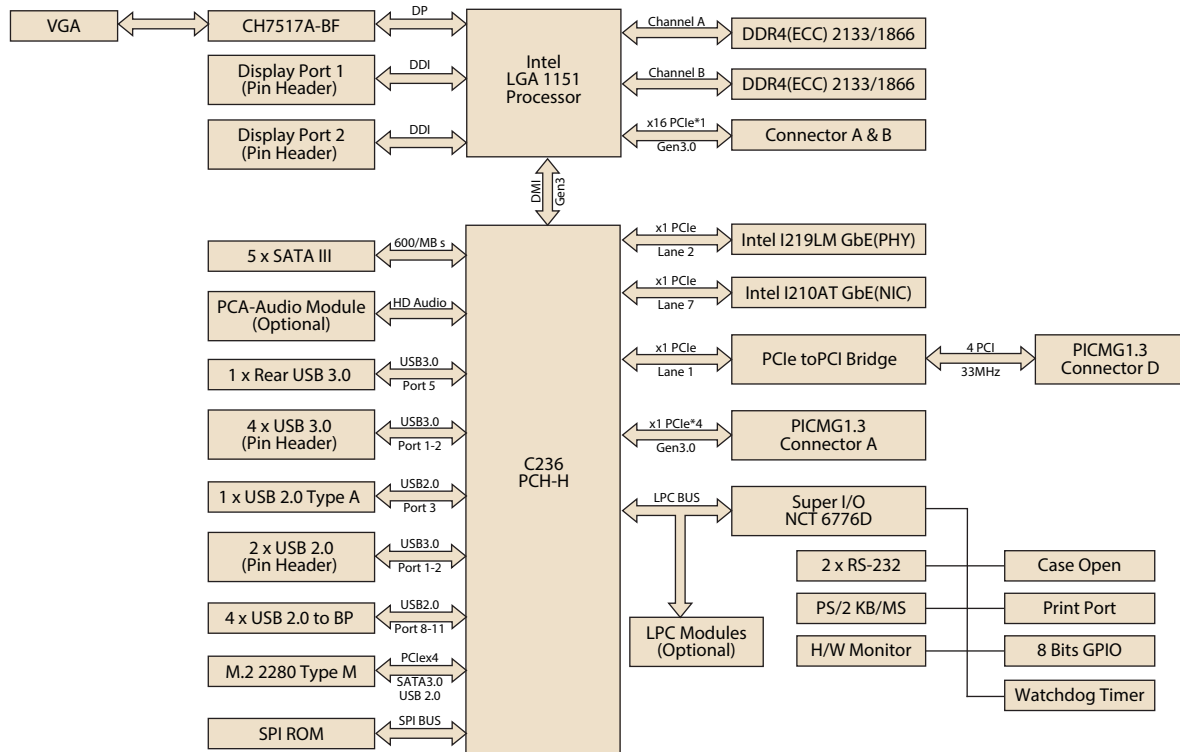

## Ordering Information

| Part Number      | PCH  | Memory      | Backplane            | LAN | VGA | DP/DVI-D | COM | SATA III | M.2 | USB 2.0 | USB 3.0 | S/W Raid | AMT |
|------------------|------|-------------|----------------------|-----|-----|----------|-----|----------|-----|---------|---------|----------|-----|
| PCE-7129G2-00A1E | C236 | ECC/Non-ECC | PCE-5BXX<br>PCE-7BXX | 2   | Yes | 2*       | 2   | 5        | 1   | 7       | 5       | Yes      | Yes |

Note: DP/DVI-D cable is optional

## Packing List

| Part Number   | Description                   | Quantity |
|---------------|-------------------------------|----------|
| 1700003194    | Serial ATA HDD data cable     | x2       |
| 1700022749-11 | Serial ATA HDD power cable    | x1       |
| 1701260305    | COM + printer ports cable kit | x1       |
| 1700060202    | Keyboard and mouse Y-cable    | x1       |
| 1700002204    | 2-port USB cable kit          | x1       |
| 9689000068    | Jumper package                | x1       |
| 2190000902    | Warranty card                 | x1       |
| 2001512910    | Startup manual                | x1       |
| 2061512900    | Utility CD                    | x1       |

## Optional Accessories

| Part Number      | Description                         |
|------------------|-------------------------------------|
| 1960052651N021   | 2U CPU cooler (PWM fan)             |
| 1960049408N001   | CPU cooler for 1U chassis           |
| PCA-AUDIO-HDB1E  | Audio module                        |
| PCA-TPM-00A1E    | TPM module                          |
| PCA-COM232-00A1E | 4-port RS-232 LPC module            |
| PCA-COM485-00A1E | 4-port RS-422/485 LPC module        |
| 1700020277-01    | 2-port USB 3.0 cable w/ BKT (30 cm) |
| 1700021831-01    | DP to DVI-D cable w/ BKT            |
| PCE-DP10-00A1E   | DP to DP cable w/ BKT               |

## I/O View



PCE-7129G2-00A1E