



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## 2-Port DB9 (RS-232) Serial PCI Card with 16550 UART, Low Profile

MODEL NUMBER: PCI-D9-02-LP

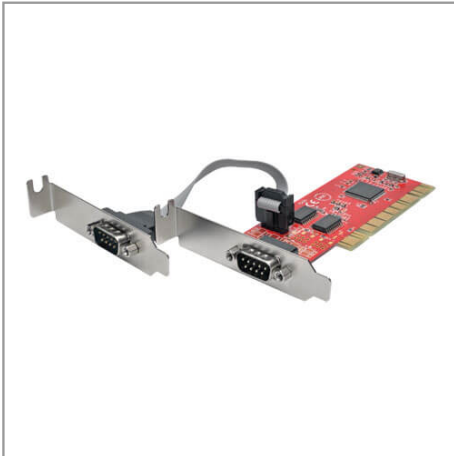

Adds 2 DB9 serial ports to your PCI computer or server or replaces existing DB9 ports. Low-profile bracket is designed for shorter computer cases.

### Description

The PCI-D9-02-LP 2-Port DB9 Serial PCI Card adds two DB9 serial ports to your computer or server. By adding the PCI-D9-02-LP to a computer with no DB9 ports or not enough of them, you can upgrade your DB9 capability without having to buy a new computer.

Perfect for home or office, the PCI-D9-02-LP supports data transfer rates up to 115.2 Kbps on each port. It easily installs inside your computer in just a few minutes. The low-profile bracket's interface is compatible with universal 3.3V and 5V 32-bit PCI/PCI-X slots. Allow the appropriate drivers to automatically install on your hard drive (a driver CD is included if they don't), and connect DB9 serial extension cables (such as Tripp Lite's P520-006) to the card's DB9 connectors.

The PCI-D9-02-LP is fully compliant with PCI Local Bus Specification Revision 2.3 and compatible with industrial standard 16550 UART. On-chip 256-byte depth FIFO in transmit and receive paths of each port. Supports hardware and software flow control; PCI IRQ sharing and PCI power management; 5-, 6-, 7-, 8- and 9-bit serial formats; Even, Odd, None, Space and Mark parity; and 1- or 2-stop bit operation.

### Features

#### Adds 2 DB9 (RS-232) Serial Ports to Your Computer

- Upgrades your DB9 capability without buying a new computer or server
- Each port supports data transfer rates up to 115.2 Kbps
- Perfect for home or office use
- Low-profile bracket to fit shorter cases

#### Easy to Install Inside Your Computer

### Highlights

- Each port supports data transfer rates up to 115.2 Kbps
- Complies with PCI Local Bus Specification Revision 2.3
- Compatible with universal 3.3V and 5V 32-bit PCI/PCI-X slots
- Compatible with industrial standard 16550 UART
- Works with Windows® and Linux®

### System Requirements

- Computer with available universal 3.3V and 5V 32-bit PCI/PCI-X slot
- Windows (XP and later) or Linux (2.6.x and later)

### Package Includes

- PCI-D9-02-LP 2-Port DB9 Serial PCI Card with 16550 UART, Low Profile
- Driver CD
- Owner's manual





- Compatible with universal 3.3V and 5V 32-bit PCI/PCI-X slots
- Appropriate drivers install to your hard drive automatically

#### Loaded with the Latest Features

- Complies with PCI Local Bus Specification Revision 2.3
- Compatible with industrial standard 16550 UART
- On-chip 256-byte depth FIFO in transmit and receive paths of each port
- Supports hardware and software flow control
- Supports PCI IRQ sharing and PCI power management
- Supports 5-, 6-, 7-, 8- and 9-bit serial formats
- Supports Even, Odd, None, Space and Mark parity
- Supports 1- or 2-stop bit operation

## Specifications

OVERVIEW	
UPC Code	037332193698
Technology	Serial (RS232)
INPUT	
Cable Length (ft.)	0
Cable Length (m)	0
PHYSICAL	
Shipping Dimensions (hwd / in.)	1.000 x 5.000 x 5.800
Shipping Dimensions (hwd / cm)	2.54 x 12.70 x 14.73
Shipping Weight (lbs.)	0.2000
Shipping Weight (kg)	0.09
Color	Red
CONNECTIONS	
Ports	2
WARRANTY	
Product Warranty Period (Worldwide)	2-year limited warranty



**Tripp Lite**  
1111 W. 35th Street  
Chicago, IL 60609 USA  
Telephone: 773.869.1234  
[www.tripplite.com](http://www.tripplite.com)

Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies:

<https://www.tripplite.com/products/product-certification-agencies>