



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China


SERIES: PCSA1-S | DESCRIPTION: DC-DC CONVERTER

FEATURES


- up to 1 W isolated output
- industry standard SIP package
- nominal input voltages: 5, 12, 24 Vdc
- single unregulated output
- 1,000 Vdc isolation voltage
- low ripple and noise
- -40 to 100°C
- efficiency up to 82%

**MODEL**

MODEL	input voltage		output voltage	output current		output power max (W)	ripple & noise ¹ max (mVp-p)	efficiency typ (%)
	typ (Vdc)	range (Vdc)		min (mA)	max (mA)			
PCSA1-S5-S5-S	5	4.5~5.5	5	0	200	1	100	79
PCSA1-S5-S12-S	5	4.5~5.5	12	0	84	1	100	79
PCSA1-S5-S15-S	5	4.5~5.5	15	0	67	1	100	80
PCSA1-S12-S5-S	12	10.8~13.2	5	0	200	1	100	81
PCSA1-S12-S12-S	12	10.8~13.2	12	0	84	1	100	81
PCSA1-S12-S15-S	12	10.8~13.2	15	0	67	1	100	82
PCSA1-S24-S5-S	24	21.6~26.4	5	0	200	1	100	80
PCSA1-S24-S12-S	24	21.6~26.4	12	0	84	1	100	80
PCSA1-S24-S15-S	24	21.6~26.4	15	0	67	1	100	81

Notes:

1. At full load, nominal input, 20 MHz bandwidth oscilloscope, with a 0.33 µF ceramic capacitor on the output.
2. Required to add a 2.2 µF (5 & 12 Vdc input models) or 4.7 µF (24 Vdc input models) ceramic capacitor to the input to reduce input voltage stress.
3. All specifications are measured at Ta=25°C, nominal input voltage, and rated output load unless otherwise specified.

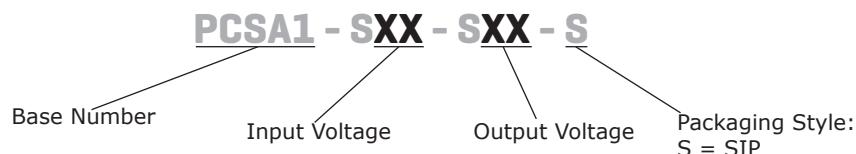PART NUMBER KEY

INPUT

parameter	conditions/description	min	typ	max	units
operating input voltage	5 Vdc input models	4.5	5	5.5	Vdc
	12 Vdc input models	10.8	12	13.2	Vdc
	24 Vdc input models	21.6	24	26.4	Vdc
surge voltage	for maximum of 100 ms				
	5 Vdc input models			9	Vdc
	12 Vdc input models			18	Vdc
current	24 Vdc input models			30	Vdc
	5 Vdc input models	250			mA
	12 Vdc input models	105			mA
filter	capacitive	55			mA
input reverse polarity protection	no				
input fuse	0.5 A time delay fuse for all models (recommended)				

Notes: 1. Required to add a 2.2 μ F (5 & 12 Vdc input models) or 4.7 μ F (24 Vdc input models) ceramic capacitor to the input to reduce input voltage stress.

OUTPUT

parameter	conditions/description	min	typ	max	units
maximum capacitive load	at full load			220	μ F
voltage accuracy				± 3.0	%
line regulation	1.0% change in input voltage			± 1.2	%
load regulation	from 100% to 20% load			± 10	%
switching frequency	at nominal Vin, full load			90	kHz
	5, 12 Vdc input models			80	kHz
temperature coefficient	24 Vdc input models				

PROTECTIONS

parameter	conditions/description	min	typ	max	units
short circuit protection	momentary			1	s

SAFETY AND COMPLIANCE

parameter	conditions/description	min	typ	max	units
isolation voltage	input to output for 1 minute	1,000			Vdc
isolation resistance	input to output	1,000			M Ω
isolation capacitance	input to output		10		pF
conducted emissions	EN 55022 Class A & Class B (external circuit required, see Figure 3)				
MTBF	as per MIL-HDBK-217F, full load, GB, 25°C			1,700,000	hours
RoHS	2011/65/EU				

ENVIRONMENTAL


parameter	conditions/description	min	typ	max	units
operating temperature	see derating curve	-40		100	°C
storage temperature		-55		125	°C
operating humidity	non-condensing			95	%

SOLDERABILITY

parameter	conditions/description	min	typ	max	units
wave soldering	see wave soldering profile			260	°C

Notes:

1. Soldering materials: Sn/Cu/Ni
2. Ramp up rate during preheat: 1.4°C/s (from 50°C to 100°C)
3. Soaking temperature: 0.5°C/s (from 100°C to 130°C), 60±20 seconds
4. Peak temperature: 260°C, above 250°C for 3~6 seconds
5. Ramp down rate during cooling: -10°C/s (from 260°C to 150°C)

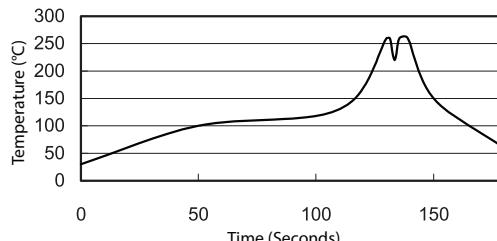

MECHANICAL

parameter	conditions/description	min	typ	max	units
dimensions	5,12 Vdc input models: 0.46 x 0.24 x 0.40 [11.6 x 6.0 x 10.2 mm] 24 Vdc input models: 0.46 x 0.30 x 0.40 [11.6 x 7.5 x 10.2 mm]				inches inches
case material	non-conductive black plastic				
weight	5, 12 Vdc input models 24 Vdc input models	1.3	1.7	g	g




MECHANICAL DRAWING

units: inches [mm]

tolerance: X.XX ±0.01 [±0.25]




pin section tolerance: ±0.002[±0.05]

5, 12 Vdc input models

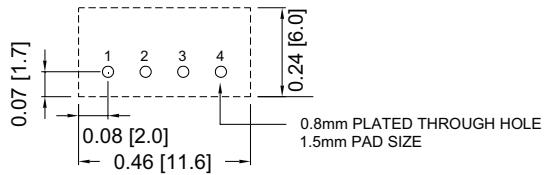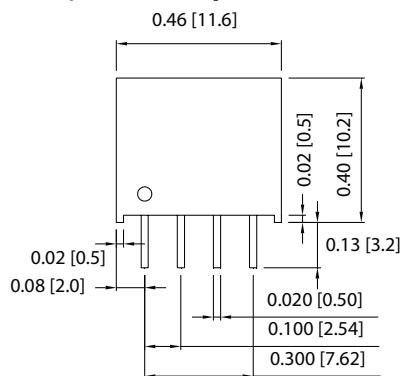


Recommended PCB Layout
Top View

24 Vdc input models


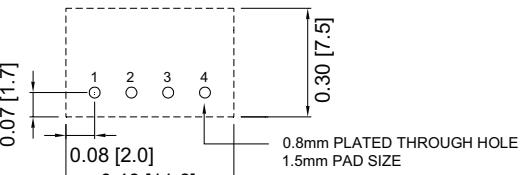

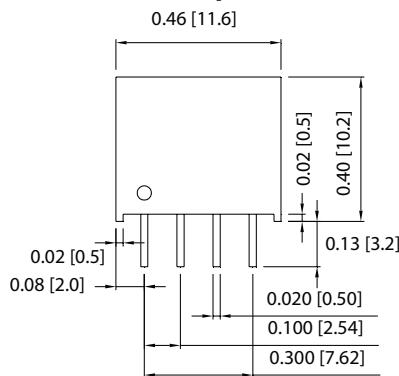


Recommended PCB Layout
Top View






DERATING CURVE

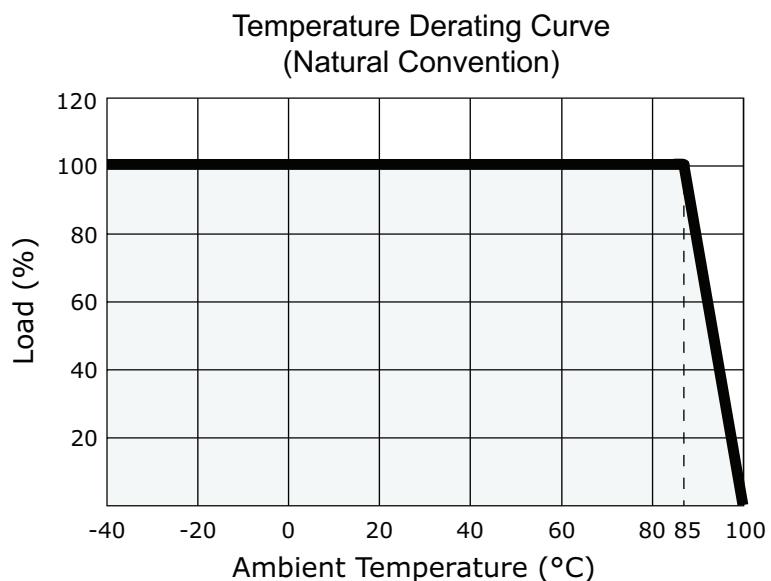

EFFICIENCY CURVES

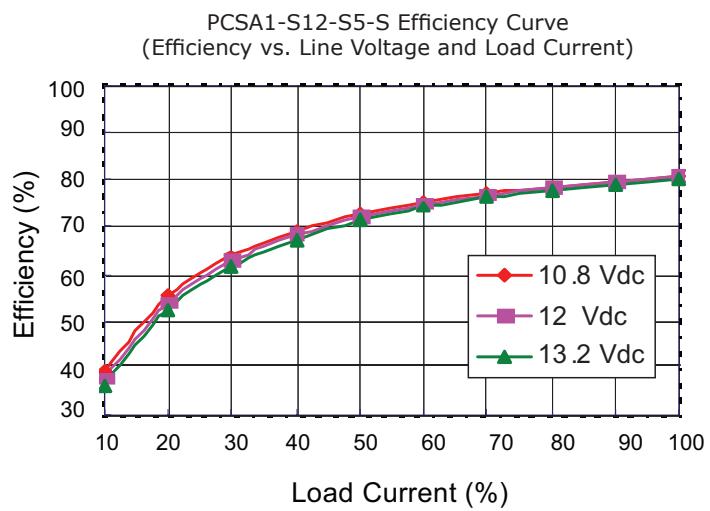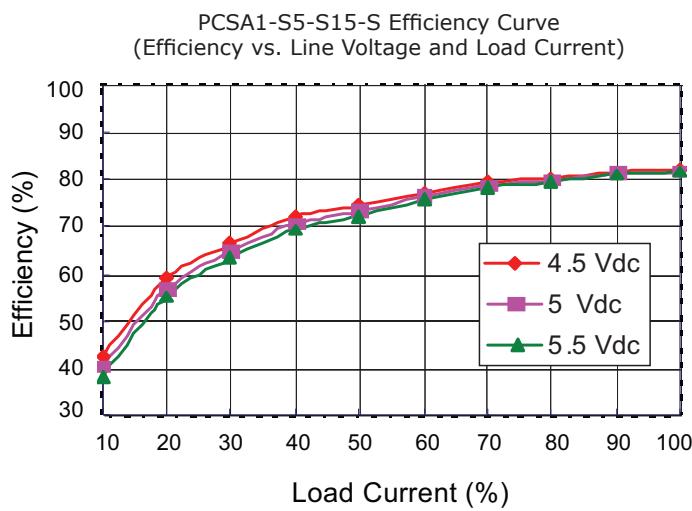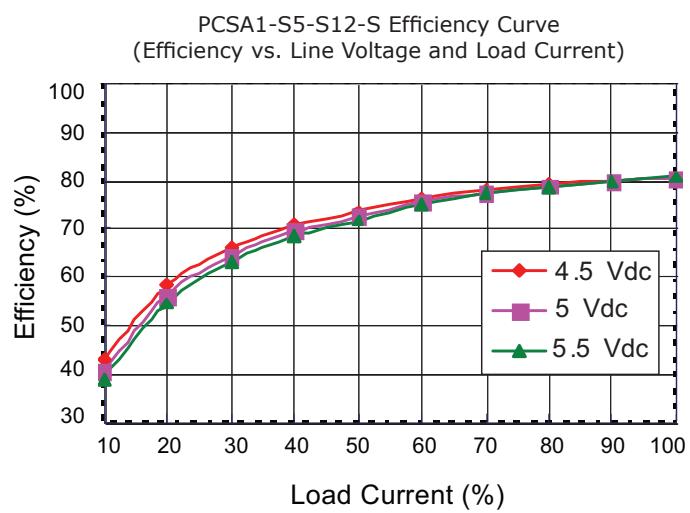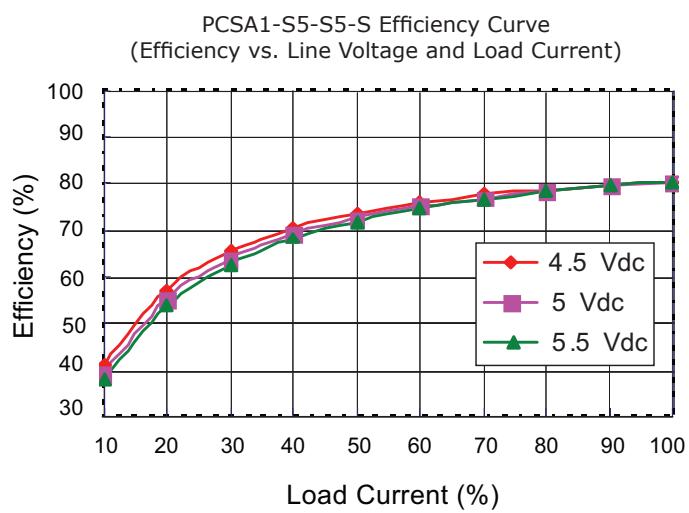

EFFICIENCY CURVES (CONTINUED)

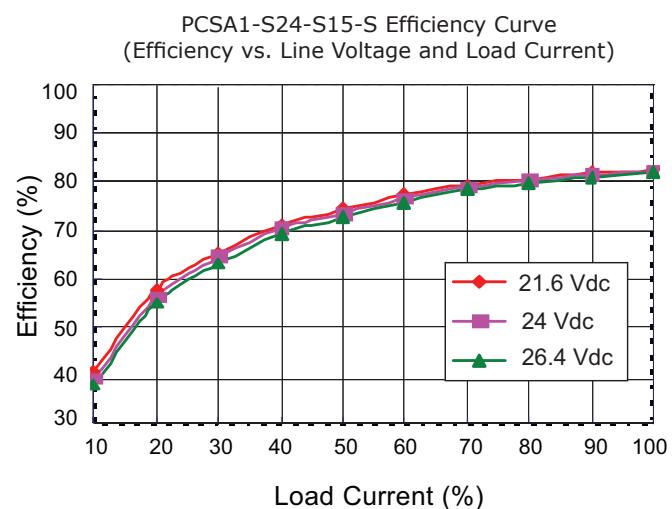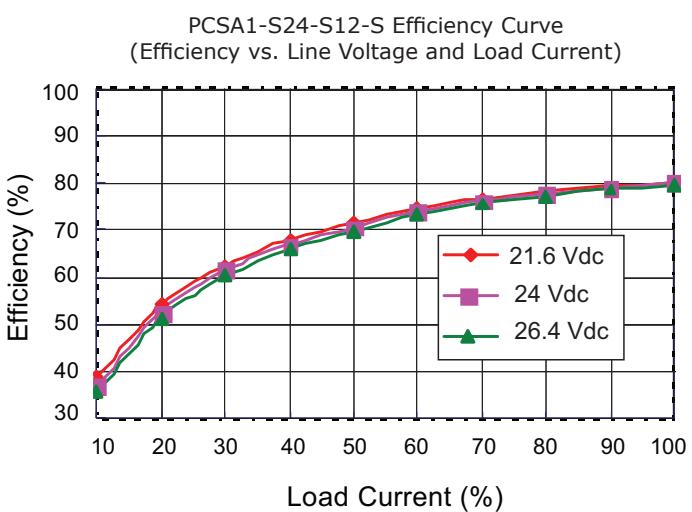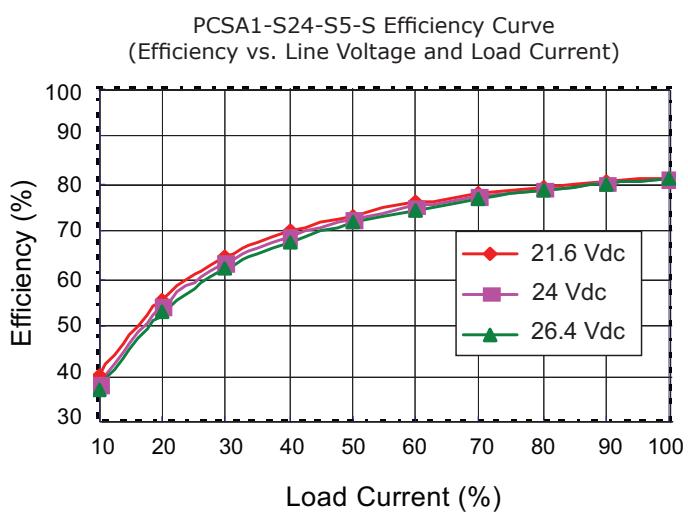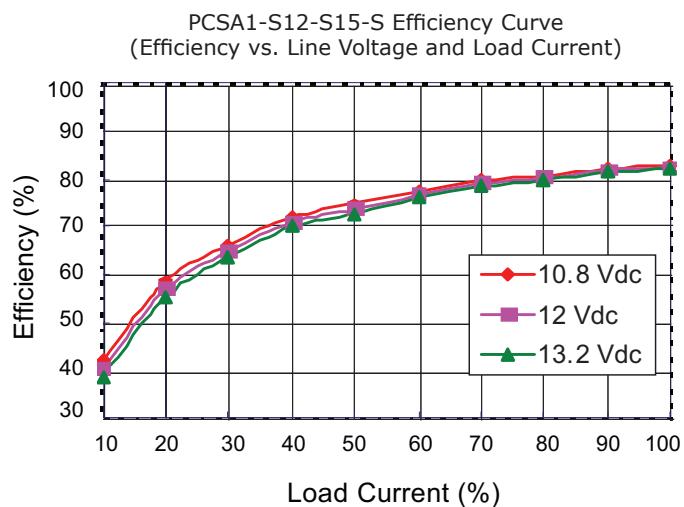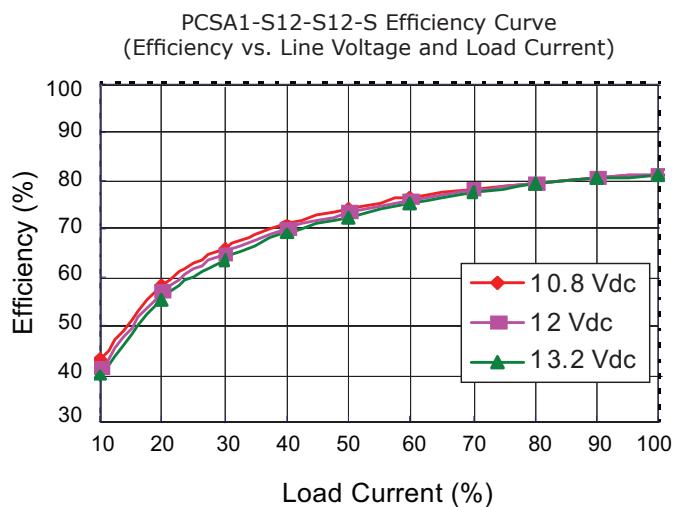


PACKAGING

5, 12 Vdc input models

units: mm

Tube size: 17.2 x 9 x 340 mm

QTY: 26 pcs

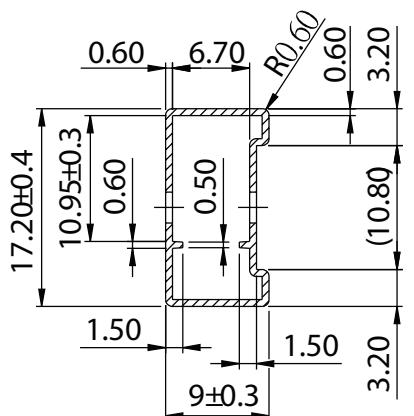


24 Vdc input models

units: mm

Tube size: 20 x 11 x 340 mm

QTY: 26 pcs

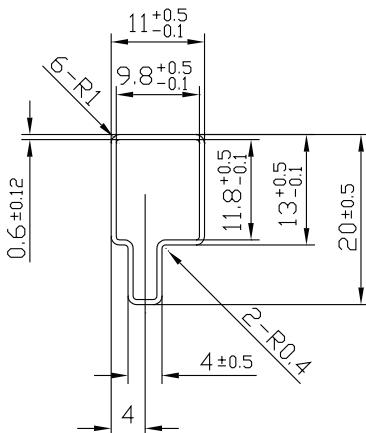

TEST CONFIGURATIONS

Input Ripple Current & Output Noise

Figure 1 Measuring Input Ripple Current

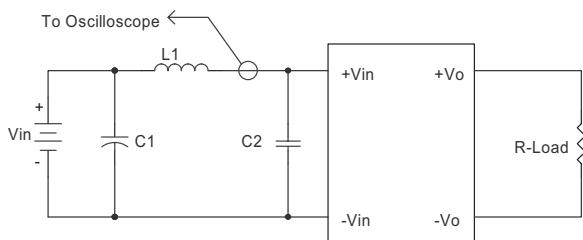


Figure 2 Measuring Output Ripple And Noise

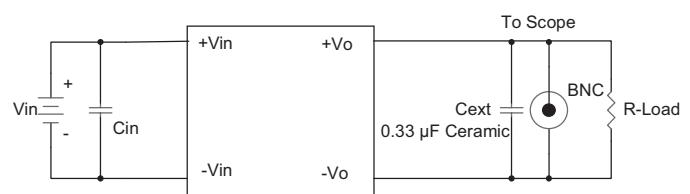


Table 1

Input Voltage (Vdc)	L1	C1	C2
5	12 μH	2.2 μF tantalum capacitor	NC
12	12 μH	2.2 μF tantalum capacitor	NC
24	12 μH	4.7 μF ceramic capacitor	NC

Table 2

Input Voltage (Vdc)	Cin
5	2.2 μF ceramic capacitor
12	2.2 μF ceramic capacitor
24	4.7 μF ceramic capacitor

EMC RECOMMENDED CIRCUIT

Test Condition

Input Voltage: Nominal

Output Load: Full Load

Figure 3 Conducted Emissions Test Circuit

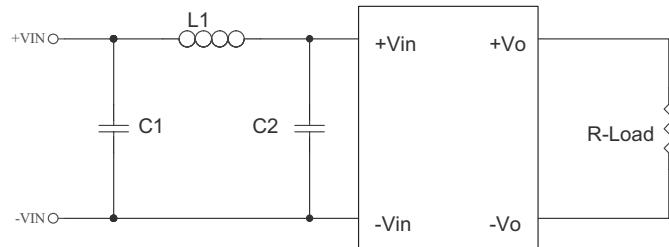


Table 3

EN55022 Class A Recommended External Circuit Components		
C1 ¹	C2 ¹	L1
4.7 μ F / 50 V	4.7 μ F / 50 V	3.3 μ H

Notes: 1. Ceramic Capacitor

Table 4

EN55022 Class B Recommended External Circuit Components		
C1 ¹	C2 ¹	L1
10 μ F / 50 V	10 μ F / 50 V	7.5 μ H

Notes: 1. Ceramic Capacitor

REVISION HISTORY

rev.	description	date
1.0	initial release	07/26/2016

The revision history provided is for informational purposes only and is believed to be accurate.



Headquarters
20050 SW 112th Ave.
Tualatin, OR 97062
800.275.4899

Fax 503.612.2383
cui.com
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.