



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Photoelectrics Diffuse-reflective, Background Suppression, IR Type PD30CNB20....IS

CARLO GAVAZZI



- Miniature sensor range
- Range: 200 mm
- Sensitivity adjustment by Potentiometer
- Modulated, infrared light 850 nm
- Supply voltage: 10 to 30 VDC
- Output: 100 mA, NPN or PNP preset
- Make and break switching function
- LED indication for output, stability and power ON
- Protection: reverse polarity, short circuit and transients
- Cable and plug versions
- Excellent EMC performance
- Excellent colour matching




Product Description

The PD30CNB20 sensor family comes in a compact 10 x 30 x 20 mm reinforced PMMA/ABS housing. The sensors are useful in applications where high-accuracy detection as well as small size is required. Compact housing and high power LED for excellent performance-size ratio.

The Potentiometer function for adjustment of the sensitivity makes the sensors highly flexible. The output type is preset (NPN or PNP), and the output switching function is NO and NC output.

Ordering Key

PD30CNB20NAM5IS

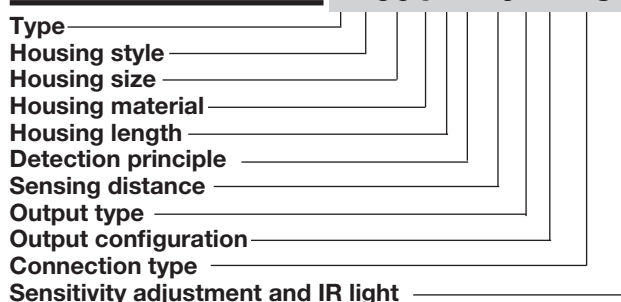

Type Selection

| Housing W x H x D | Range S _n | Connection | Ordering no. NPN Make and break switching | Ordering no. PNP Make and break switching |
|----------------------|-------------------------|------------|---|---|
| 10 x 30 x 20 mm | 200 mm | Cable | PD 30 CNB 20 NAIS | PD 30 CNB 20 PAIS |
| 10 x 30 x 20 mm | 200 mm | Plug | PD 30 CNB 20 NAM5IS | PD 30 CNB 20 PAM5IS |

Specifications EN 60947-5-2

| | | | |
|---|---|---|--|
| Rated operating distance (S_n) | Up to 200 mm, reference target Kodak test card R27, white, 90% reflective, 100 x 100 mm | No load supply current (I_o) | ≤ 20 mA @ U _B max ≤ 40 mA @ U _B min |
| Maximum detecting distance @ 200 mm white background White object 90% refl. Grey object 18% refl. Black object 6% refl. | ≤ 200 mm ≤ 200 mm ≤ 200 mm | Minimum operational current (I_m) | ≤ 0.5 mA |
| Blind zone | 10 mm | OFF-state current (I_r) | ≤ 100 μA |
| Sensitivity Electrical adjustment Mechanical adjustment | 210° 240° | Voltage drop (U_d) | ≤ 2 VDC @ I _e max |
| Temperature drift | ≤ 0.05%/°C | Protection | Short-circuit, reverse polarity and transients |
| Hysteresis (H) | ≤ 10% | Light source | GaALAS, LED, 850 nm |
| Rated operational volt. (U_B) | 10 to 30 VDC (ripple included) | Light type | Infrared, modulated |
| Ripple (U_{ripple}) | ≤ 10% | Emitter angle | ± 1.5° @ half sensing distance |
| Output current Continuous (I _a) Short-time (I) | ≤ 100 mA ≤ 100 mA (max. load capacity 100 nF) | Ambient light | ≤ 10,000 lux |
| | | Operating frequency (f) | ≤ 500 Hz |
| | | Response time OFF-ON (t _{ON}) ON-OFF (t _{OFF}) | ≤ 1 ms ≤ 1 ms |
| | | Power ON delay (t_v) | ≤ 200 ms |
| | | Output function Open collector | NPN or PNP by sensor type |
| | | Output switching function | N.O. and N.C. |




Specifications (cont.)


| | | | |
|---|--|---|--|
| Indication Output ON Power ON | LED, yellow LED, green | Rated insulation voltage | ≤ 500 VAC (rms) |
| Environment Installation category Pollution degree Degree of protection | III (IEC 60664/60664A; 60947-1) 3 (IEC 60664/60664A; 60947-1) IP 67 (IEC 60529; 60947-1) | Housing material Body Frontglas Trimmer shaft | ABS Light Grey PMMA Red POM Dark Grey |
| Ambient temperature Operating Storage | -25° to +60°C (-13° to +140°F) -40° to +70°C (-40° to +158°F) | Connection Cable Plug | PVC, black, 2 m 4 x 0.14 mm ² , Ø = 3.3 mm M8, 4-pin (CON. 54-series) |
| Vibration | 10 to 150 Hz, 1.0 mm/15 G (IEC 60068-2-6) | Weight Cable version Plug version | ≤ 50 g ≤ 20 g |
| Shock | 30 g / 11ms, 3 pos, 3 neg per axis (IEC 60068-2-6, 60068-2-32) | CE-marking | Yes |
| | | Approvals | cULus (UL508 + CSA) |

Operation Diagram


Tv = Power ON delay

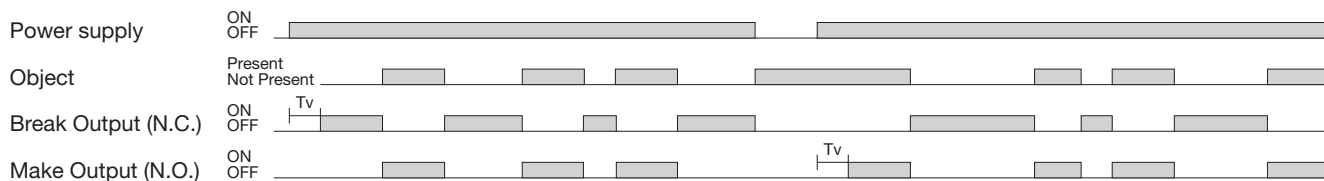


Detection Diagram

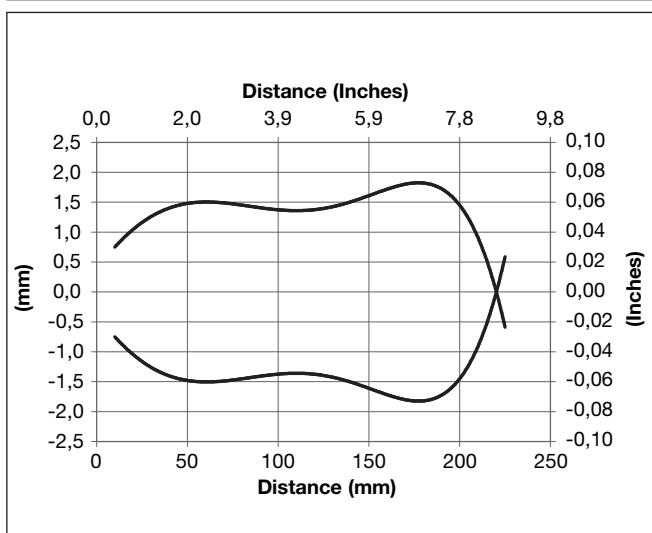


Sensing Conditions

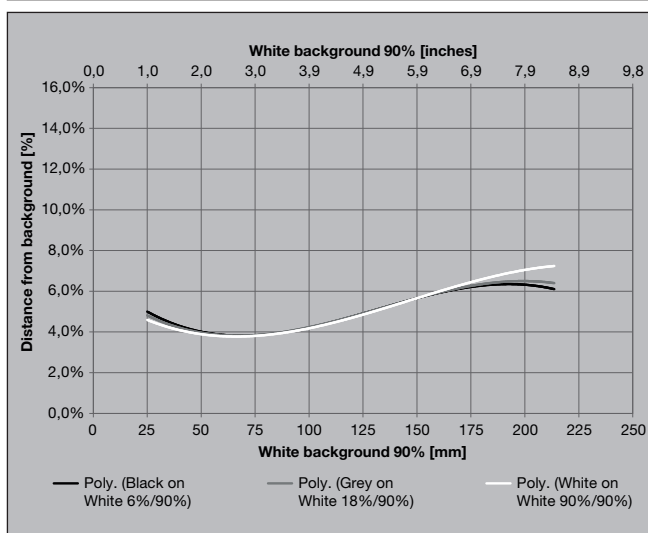

Wiring Diagrams

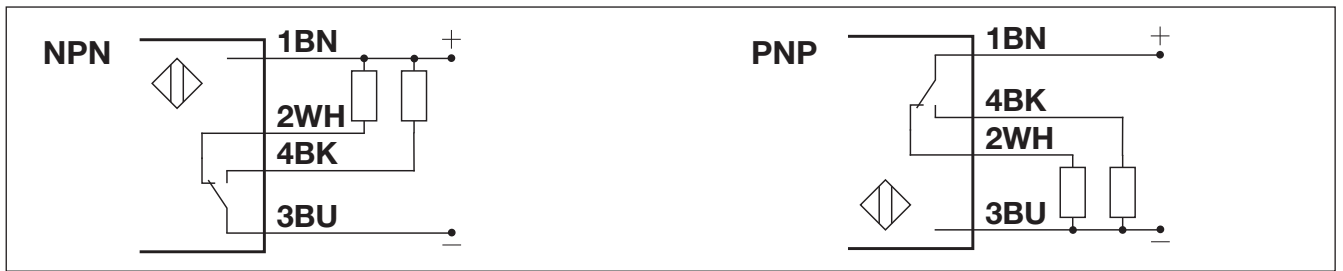

Dimensions

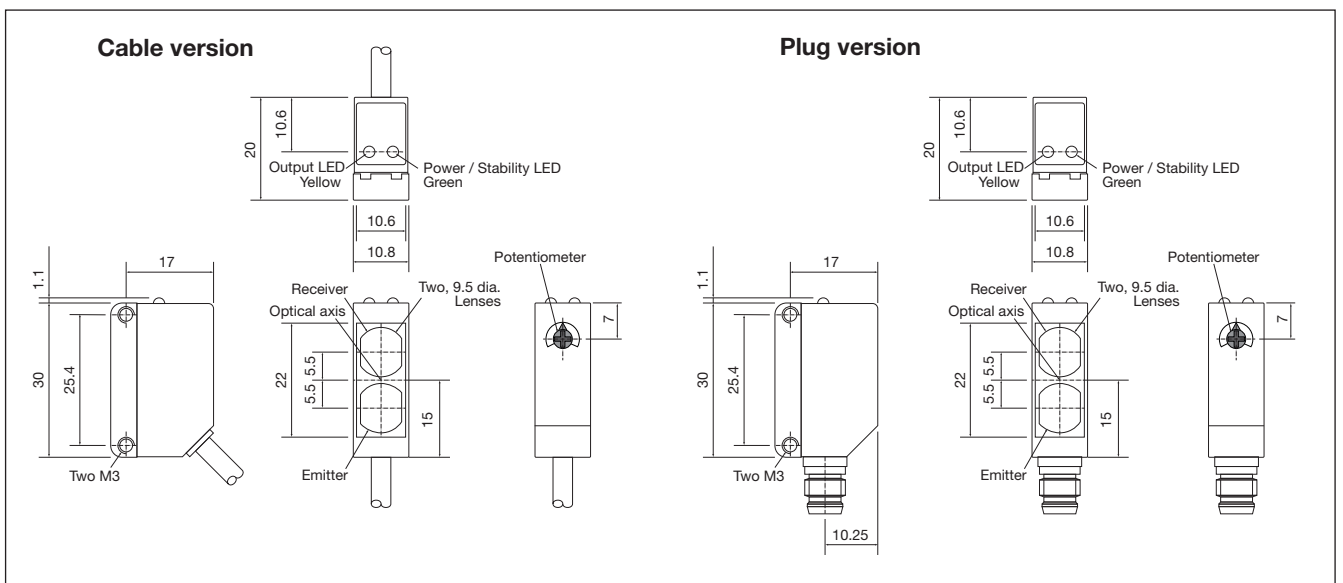

Installation Hints

| | | | |
|--|---|---|--|
| <p>To avoid interference from inductive voltage / current peaks, separate the proximity switch cables from any other power cables. E.g. Engine, contactor or solenoid cables</p> | <p>Relief of the cable strain</p> <p>The cable should not be pulled</p> | <p>Protection of the sensing face</p> <p>A proximity switch should not serve as mechanical stop</p> | <p>Sensor mounted on a mobile carrier</p> <p>Any repetitive flexing of the cable should be avoided</p> |
|--|---|---|--|

Accessories

- Mounting bracket APD30-MB1 or APD30-MB2 to be purchased separately.

Delivery Contents

- Photoelectric switch: PD30CNB20 ...
- Screwdriver
- **Packaging:** Plastic bag