



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




# Photoelectrics

## Retro-reflective, Industrial Door Market

### Type PD86, Polarized, Relay Output, Mute Input

CARLO GAVAZZI

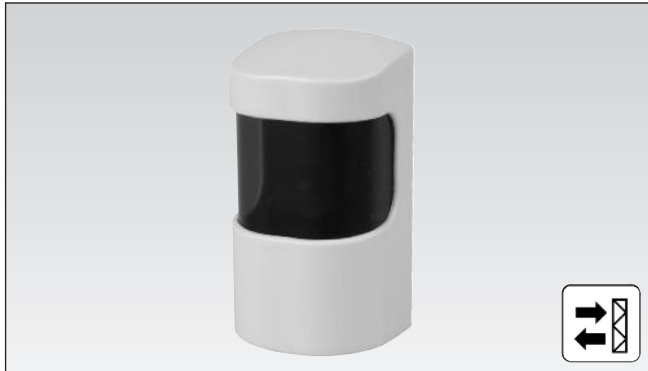

- Range: 12 m @ ER 4 (15 m @ ER100)
- Modulated, visible light, polarized
- Make or break switching function, selectable by DIP-switch
- Active high or active low mute function (switch selectable)
- LED-indication for target detected and power
- Multi supply voltage: 12-24 VDC/VAC, 50/60 Hz
- 86 x 44 x 39 mm reinforced PC/ABS-housing, IP 66
- SPST relay output
- High EMC and ambient light immunity
- CE, UL325 and UL508 approved



## Product Description

The PD86 is a powerful polarized retro reflective sensor. The sensor is designed to meet the harsh requirements in industrial door and gate environments. With a sensing distance of 12 m, the sensor is useful in applications where dust and weather conditions

will influence on the sensing distance. The sensor is made of a strong glass reinforced PC housing. With the mute input, the sensor fulfills European and North American regulations for industrial doors.

## Ordering Key

**PD86CNP12QPMU**

Type	_____
Housing style	_____
Housing size	_____
Housing material	_____
Not used	_____
Detection principle	_____
Sensing distance	_____
Supply voltage	_____
Output Function	_____
Mute function	_____

## Type Selection

Housing W x H x D	Range (S <sub>n</sub> )	Ordering no.
86 x 44 x 39 mm	12 m	PD86CNP12QPMU


## Specifications

<b>Rated operating dist. (S<sub>n</sub>)</b>	12 m @ ER4 ref. target (0 to 5,000 lux)	<b>Dielectric voltage</b>	1,000 VAC (rms) (cont./supply)
<b>Blind zone</b>	≤ 0.15 m	<b>Light source</b>	GaAlAs, LED, 660 nm
<b>Sensitivity</b>	Fixed	<b>Light type</b>	Visible, modulated
<b>Temperature drift</b>	≤ 0.6 %/°C	<b>Optical angle</b>	± 1.5°
<b>Differential travel (H)</b> Hysteresis	3 to 20%	<b>Light spot size</b>	280 mm at 4 m
<b>Rated operational volt. (U<sub>B</sub>)</b> AC: 45 to 65 Hz	12-24 VDC, - 15% +20% 12-24 VAC, - 15% +20%	<b>Ambient light</b>	Max. 5,000 lux
<b>Rated operational power</b> (Relay ON)	12 VAC 648 mW 24 VAC 1680 mW 12 VDC 324 mW 24 VDC 840 mW	<b>Operating frequency</b>	20 Hz
<b>Output</b>	μ (micro gap)	<b>Response time (object related)</b> OFF-ON (t <sub>ON</sub> ) ON-OFF (t <sub>OFF</sub> )	≤ 20 ms ≤ 30 ms
Contact ratings (AgCdO)	AC 1 0.5 A/30 VAC DC 1 1 A/30 VDC	<b>Power ON delay (t<sub>v</sub>)</b>	≤ 300 ms (typ. 100 ms)
Resistive loads	AC 15 0.5 A/50 VAC DC 13 1 A/30 VDC	<b>DIP-switch Selectable functions</b> Mute input Relay output	active high or active low NO (make) or NC (break)
Small inductive loads	≥ 1,000 000 cycles > 100,000 AC11 or DC11 1,800 operations per hour	<b>Mute function</b> Active high Response time Hold time Active low Response time Hold time	≥ 12 VDC/VAC < 45 ms < 70 ms < 6 VDC/VAC < 70 ms < 45 ms
Mechanical life (typical)		<b>Max current</b>	35 mA @ 24 VDC 70 mA @ 24 VAC
Electrical life (typical)			
Minimum load power	1 mW		

## Specifications (cont.)


<b>Indication</b>		<b>Rated insulation voltage</b>	250 VAC (rms)
Target detected	LED, yellow	<b>Housing material</b>	Outer cover PC, grey Inner cover PMMA, red Backpart ABS, black Cable outlet Kraiburg TC5MLZ or TP5VCZ
Power	LED, green		
Signal	LED, green		
<b>Environment</b>		<b>Connection</b>	6 x 1.5 mm <sup>2</sup> terminal block for cable 3 to 6.5 mm
Overvoltage category	III (IEC 60664/60664A; 60947-1)	Screw terminal	
Pollution degree	3 (IEC 60664/60664A; 60947-1)	One entry	
Degree of protection	IP 66 (IEC 60529; 60947-1)	<b>Weight</b>	110 g
<b>Temperature</b>		<b>UL-Approval</b>	UL325, UL508
Operating	-25° to +60°C (-76° to +140°F)	<b>CE-marking</b>	Yes EN12453, EN12445, EN12978
Storage	-35° to +80°C (-31° to +176°F)		
<b>Vibration</b>	10 to 150 Hz, 0.5 mm/7.5 g (IEC 60068-2-6)		
<b>Shock</b>	2 x 1 m & 100 x 0.5 m (IEC 60068-2-32)		

## Wiring Diagram

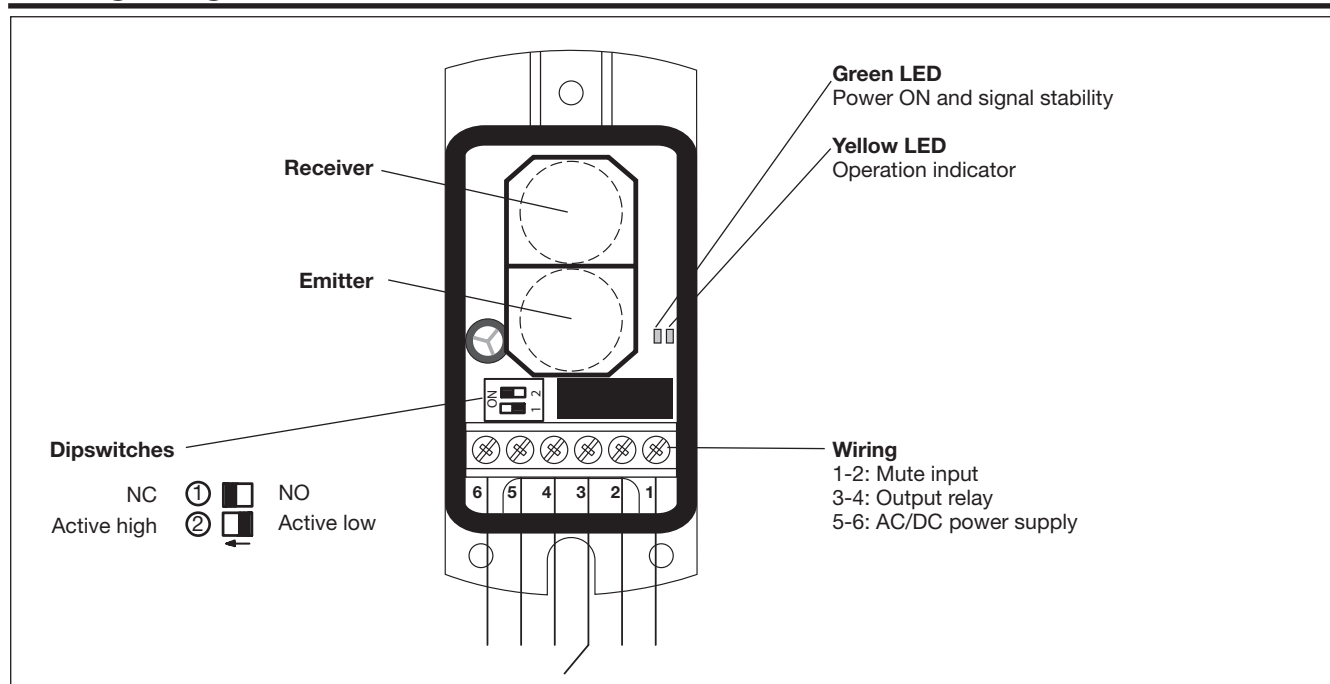


## Operation Diagram


$t_v$  = Power ON delay

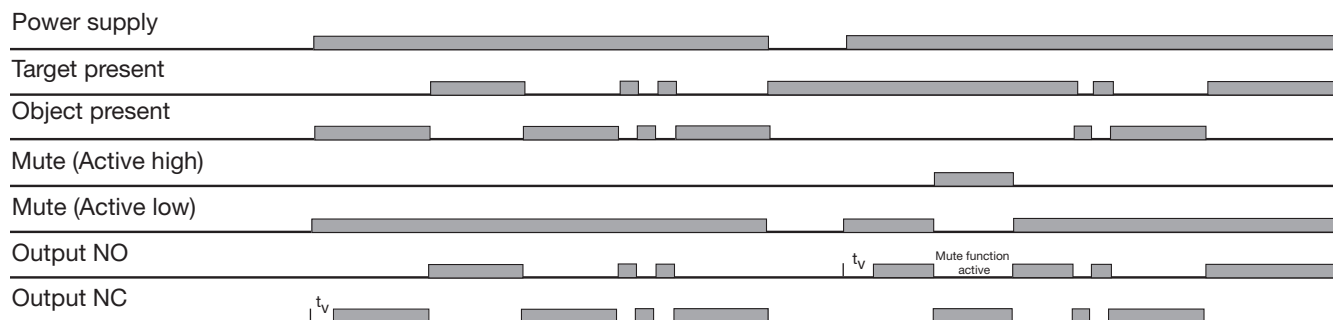


### Detection Diagram

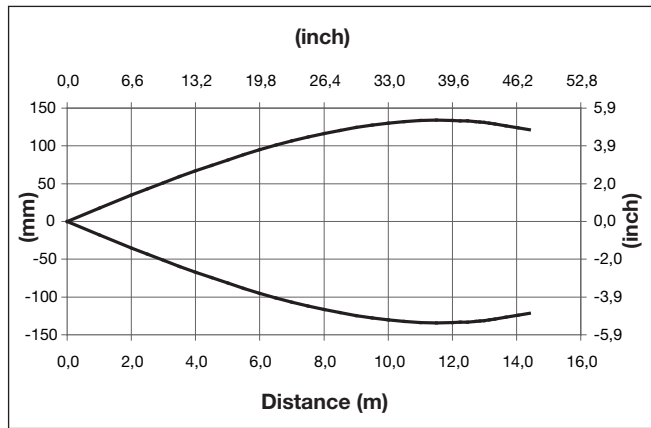


### Excess Gain

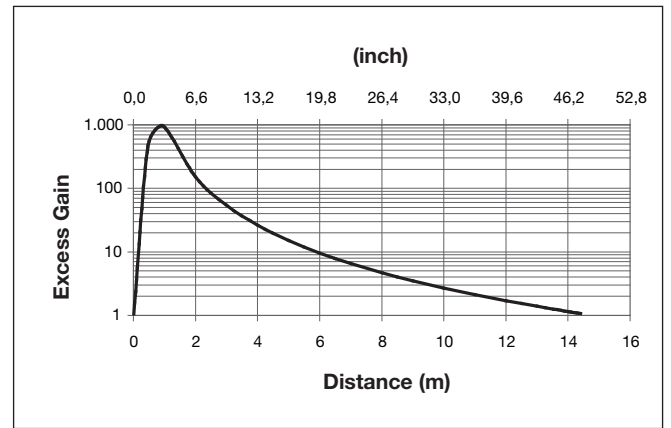

### LED

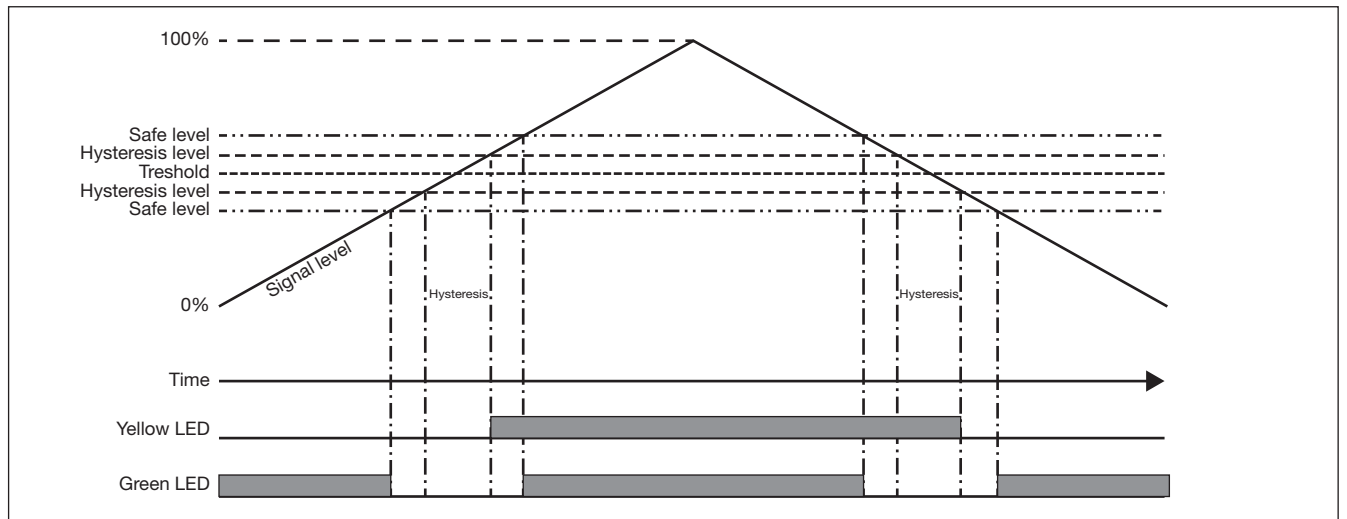

### Dimensions

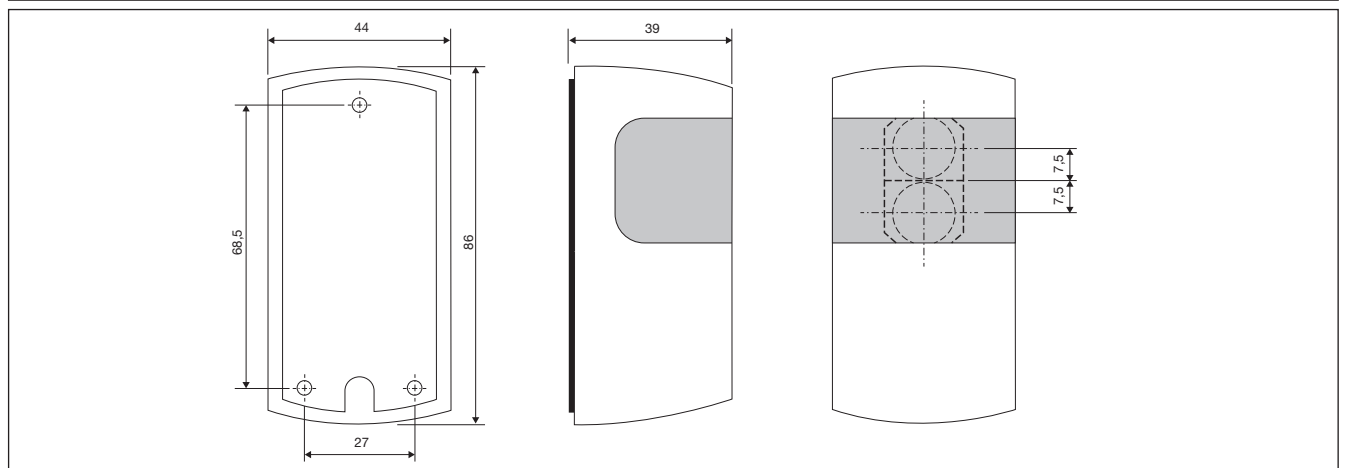





## Delivery Contents

- Photoelectric switch: PD86CNP12QPMU
- Screws and rawlplugs
- Installation instruction
- **Packaging:** Cardboard box

## Accessories

- Reflectors: ER series

## Installation Hints
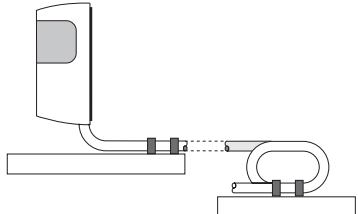
<p><i>To avoid interference from inductive voltage / current peaks, separate the proximity switch cables from any other power cables. E.g. Engine, contactor or solenoid cables</i></p>  <p>Incorrect</p> <p>Correct</p> <p>&gt; 100 mm</p>	<p><i>Relief of the cable strain</i></p>  <p>Incorrect</p> <p>Correct</p> <p><i>The cable should not be pulled</i></p>	<p><i>Protection of the sensing face</i></p>  <p>Incorrect</p> <p><i>A proximity switch should not serve as mechanical stop</i></p>	<p><i>Sensor mounted on a mobile carrier</i></p>  <p><i>Any repetitive flexing of the cable should be avoided</i></p>
--	---	--	--