



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



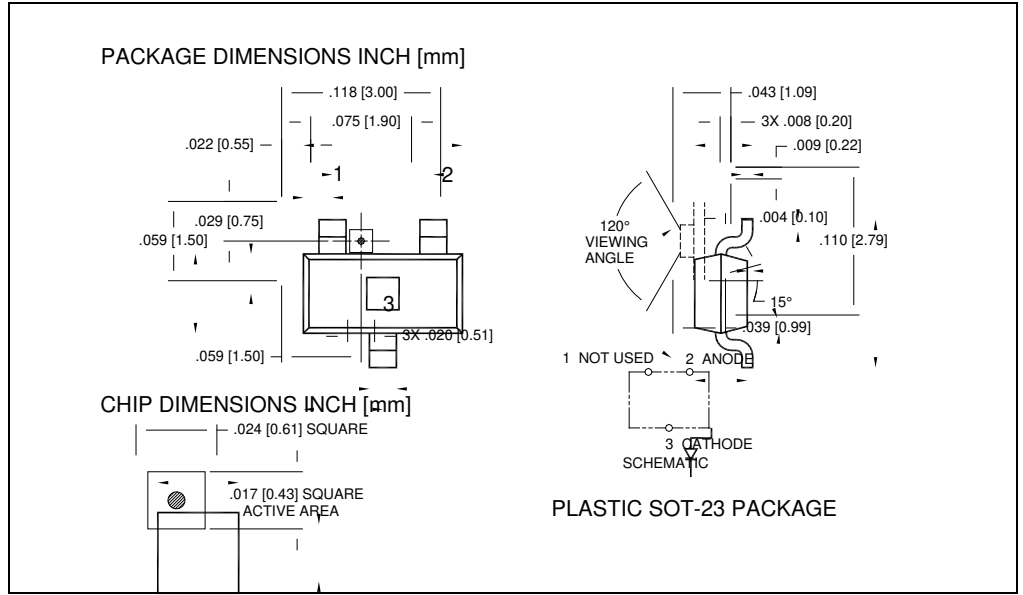

**DESCRIPTION**

The **PDB-C150SM** is a blue enhanced PIN silicon photodiode in a photoconductive mode packaged in a water clear SOT-23 surface mount package.

**FEATURES**

- Surface Mount
- Photoconductive
- High Speed
- Low cost

**RELIABILITY**

Contact Luna for recommendations on specific test conditions and procedures.

**APPLICATIONS**

- Industrial Control
- Opto Switches
- Opto Counters



**ABSOLUTE MAXIMUM RATINGS**

SYMBOL	MIN	MAX	UNITS	
Reverse Voltage	-	- 50	V	T <sub>a</sub> = 23°C UNLESS OTHERWISE NOTED
Storage Temperature	-40	- +125	°C	-
Operating Temperature	-40	to +80	°C	-
Soldering Temperature*	-	- +260	°C	-

\* 1/16 inch from case for 3 seconds max.

**OPTO-ELECTRICAL PARAMETERS**

$T_a = 23^\circ\text{C}$  UNLESS NOTED OTHERWISE

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Short Circuit Current	H= 100 fc, 2850 K	1	2	-	$\mu\text{A}$
Dark Current	$V_R = 10\text{ V}$	-	2	30	nA
Shunt Resistance	$V_R = 10\text{ mV}$	-	100	-	$\text{M}\Omega$
Junction Capacitance	$V_R = 10\text{V}; f = 1\text{ MHz}$	-	1	5	pF
Spectral Application Range	Spot Scan	400	-	1100	nm
Breakdown Voltage	$I = 10\ \mu\text{A}$	30	100	-	V
Noise Equivalent Power	$V_R = 10\text{V}@\lambda = \text{Peak}$	-	$2.5 \times 10^{-15}$	-	$\text{W}/\sqrt{\text{Hz}}$
Response Time**	$R_L = 50\Omega, V_R = 50\text{ V}$	-	6.0	-	nS

\*\*Response time of 10% to 90% is specified at 660nm wavelength light.

**TYPICAL PERFORMANCE**

**SPECTRAL RESPONSE**

