

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China











WWW.LUNAINC.COM

Precision – Control – Results



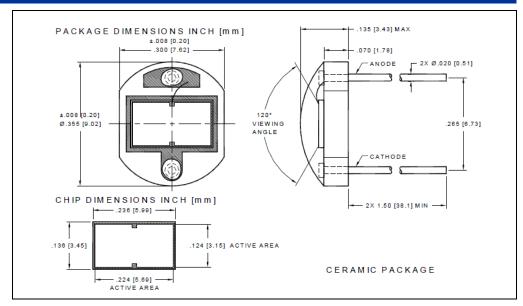

DESCRIPTION

The **PDB-V107** is a blue enhanced PIN silicon photodiode in a photovoltaic mode, packaged in a ceramic package.

FEATURES

- Low Noise
- Blue Enhanced
- High Shunt Resistance
- High Response

RELIABILITY

Contact Luna for recommendations on specific test conditions and procedures.

APPLICATIONS

- Instrumentation
- Industrial
- Medical



ABSOLUTE MAXIMUM RATINGS

SYMBOL	MIN		MAX	UNITS	
Reverse Voltage	-	-	75	V	T _a = 23°C UNLESS OTHERWISE NOTED
Storage Temperature	-40	to	+100	°C	-
Operating Temperature	-40	to	+90	°C	-
Soldering Temperature*	-	-	+240	°C	-

^{* 1/16} inch from case for 3 seconds max.



WWW.LUNAINC.COM

Precision – Control – Results

OPTO-ELECTRICAL PARAMETERS

T_a = 23°C UNLESS OTHERWISE NOTED

PARAMETER	TEST CONDITIONS	IDITIONS MIN		MAX	UNITS	
Short Circuit Current	H=100 fc, 2850 K	170	-	-	μА	
Dark Current	V _R = 10V	-	400	800	pA	
Shunt Resistance	V _R = 10 mV	100	500	-	МΩ	
Junction Capacitance	$V_R = 0V$, $f = 1$ MHz	-	2000	-	pF	
Spectral Application Range	Spot Scan	350	-	1100	nm	
Responsivity	λ = 450nm V, V _R =0V	0.15	0.17	-	A/W	
Breakdown Voltage	Ι = 10 μΑ	30	50	-	V	
Noise Equivalent Power	V _R = 0V@ λ=Peak	-	2x10 ⁻¹³	-	W/√ _{Hz}	
Decreas Time**	$RL = 50\Omega$, $V_R = 0V$	-	190	-	nS	
Response Time**	$RL = 50\Omega$, $V_R = 10V$	-	13			

^{**}Response time of 10% to 90% is specified at 660nm wavelength light.

TYPICAL PERFORMANCE

SPECTRAL RESPONSE

