



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



MODEL:

PDU3MV6H50A

3-Phase Metered Rackmount PDU



**208V
3-Phase Input**



**Hubbell
CS8365C Plug**



**208V Single-
Phase Output**



C19



C13



L6-30R



**14.4kW
Load Capacity**



**Digital
Load Meter**




**0U
Rackmount**








**Toolless
Mounting
Buttons**

- A** Digital Load Meter
- B** C13 and C19 Outlets
- C** 20A 2-Pole Hydraulic Magnetic Circuit Breakers
- D** Removable Cord Retention Brackets
- E** Removable Mounting Brackets
- F** Toolless Mounting Buttons with Removable 90° Rotation Brackets
- G** 6-ft. Input Power Cord
- H** Hubbell CS8365C Twist-Lock Input Plug
- I** Durable Metal Case




AC Input Connection: Insert Hubbell CS8365C twist-lock plug into compatible Hubbell CS8364C or CS8369 utility, generator or UPS outlet.

Also Includes: Cable Ties, Owner's Manual, PowerAlert Software CD-ROM

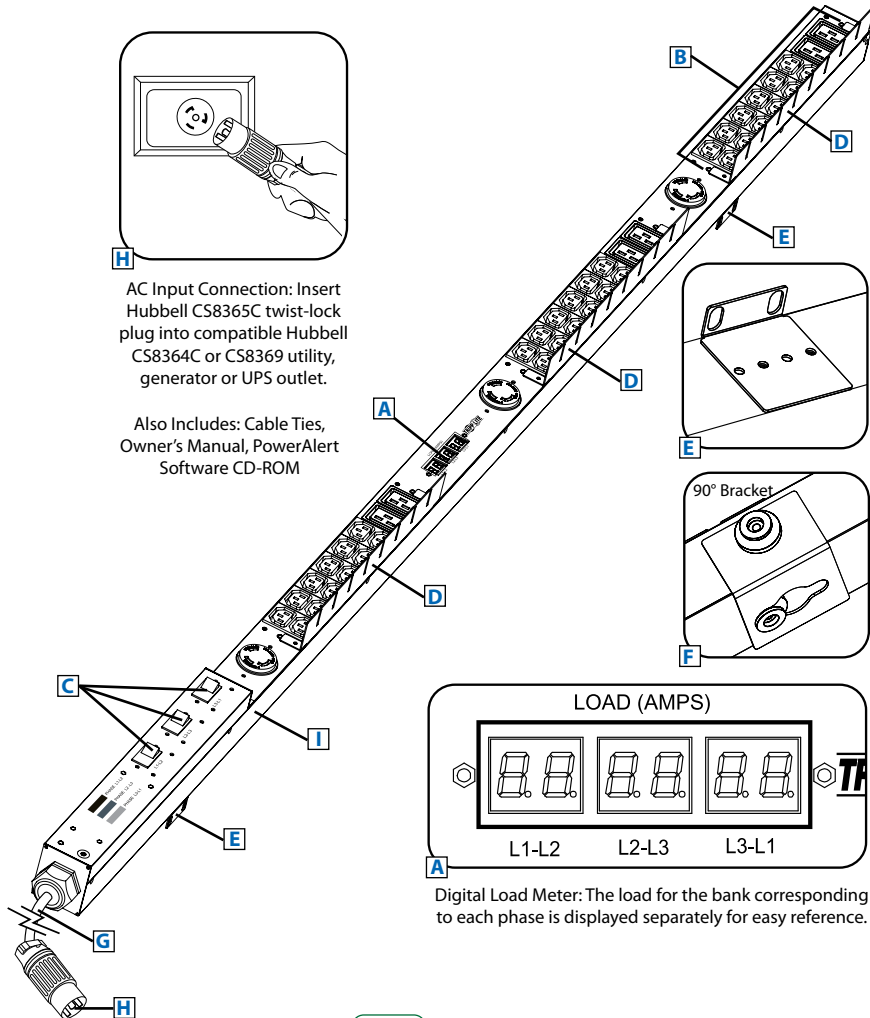

Note: Installed 17.67 mm toolless mounting buttons can be replaced with included 14.17 mm buttons for additional compatibility.

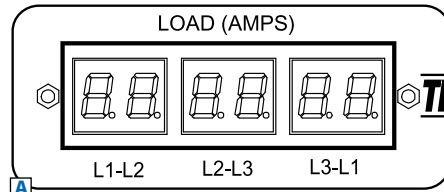

Digital Load Meter: The load for the bank corresponding to each phase is displayed separately for easy reference.



Specifications

| | |
|-------------------------------------|--|
| Model | PDU3MV6H50A |
| Voltage | 208V (3-Phase Input/Single-Phase Output) |
| Frequency | 50/60Hz |
| Load Capacity | 14.4kW |
| Input Plug | Hubbell CS8365C (50A, 3-Pole, 4-Wire) |
| Input Cord Length | 6 ft. |
| Outlets | 45 (36 C13 / 6 C19 / 3 L6-30R) |
| Primary Mounting Option | 0U (Vertical) Rackmount |
| Unit Weight & Dimensions | 14.5 lbs / 70 x 2.65 x 2.2 in. <i>See next page for detailed unit measurements.</i> |
| Certifications | Tested to UL 60950-1 (US & Canada), NOM (Mexico), FCC Class A, RoHS |







Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

- Distributes power to 45 outlets (12 C13, 2 C19 and 1 L6-30R per phase)
- Displays load for any output phase in real time
- Perfect for rackmount server, network and telecom applications

SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS



1111 W. 35th Street
Chicago, IL 60609 USA
773.869.1234
www.tripplite.com

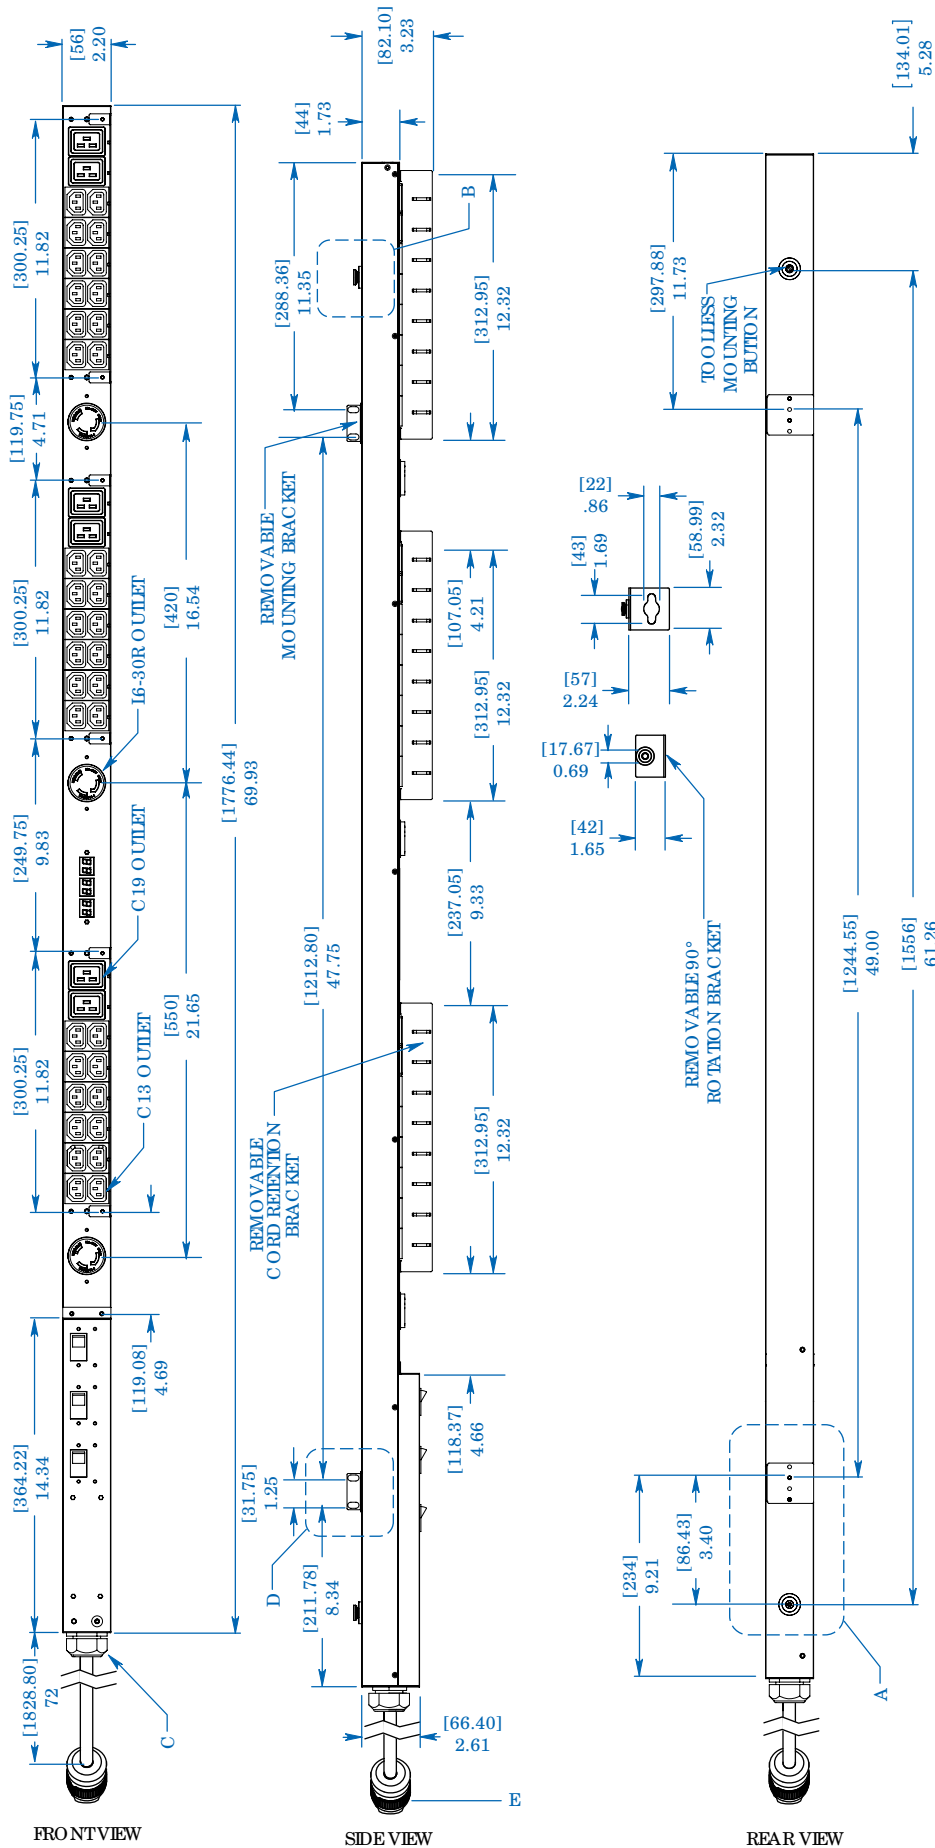

MODEL:
PDU3MV6H50A
TRIPP-LITE

1111 W. 35th Street
 Chicago, IL 60609 USA
 773.869.1234
 www.tripplite.com

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.