



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



MODELS:

# PDU3VN3L1530, PDU3VN6L1530B, PDU3VN10L1530

## 3-Phase Monitored Rack-Mount PDU



200/208/240V  
3-Phase Input



NEMA L15-30P  
Plug



200/208/240V  
Single-Phase  
Output



48 Total  
Outlets



10kW

10kW Load  
Capacity



Multimode  
Load Meter



0U  
Rack Mount









Toolless  
Mounting  
Buttons

- A** Digital Load Meter
- B** C13 and C19 Outlets
- C** 20A Circuit Breakers (x3, One per Load Bank)
- D** Plug-Lock Cable Retention Inserts
- E** Removable Mounting Brackets
- F** Toolless Mounting Buttons with Removable 90° Rotation Brackets
- G** PDU3VN3L1530: 3 ft. Input Power Cord  
PDU3VN6L1530B: 6 ft. Input Power Cord  
PDU3VN10L1530: 10 ft. Input Power Cord
- H** NEMA L15-30P Input Plug
- I** Durable Metal Housing
- J** Network Interface
- K** RJ45 Ethernet Jack
- L** Manual Configuration Port
- M** Environmental Monitoring Port
- N** Network Interface Reset Button

Also Includes:  
Owner's Manual

Multimode Load Meter: Display the load for any phase or bank, display temperature or humidity (requires optional EnviroSense sensor), display the IP address and rotate the display 180°.

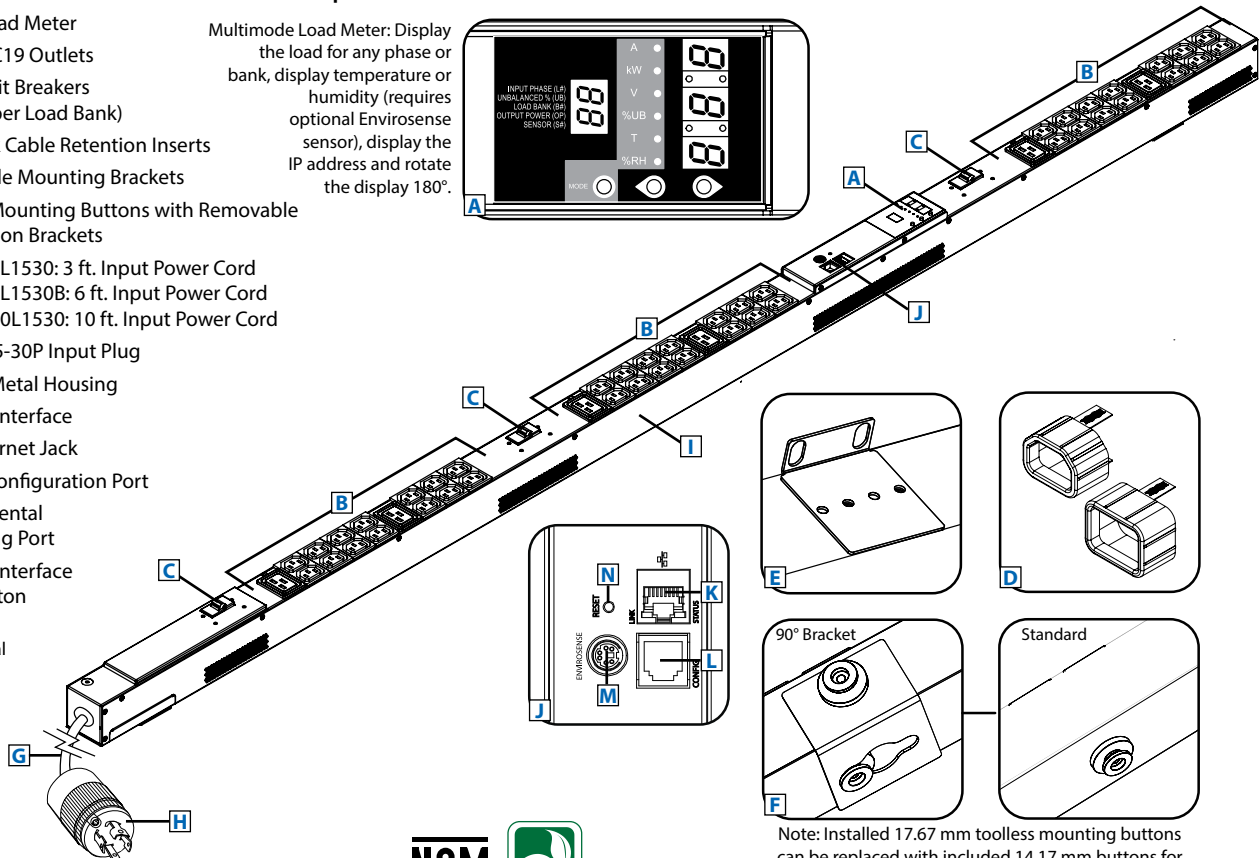

Note: Installed 17.67 mm toolless mounting buttons can be replaced with included 14.17 mm buttons for additional compatibility.

### Specifications

Models	PDU3VN3L1530, PDU3VN6L1530B, PDU3VN10L1530
Voltage	200/208/240V (3-Phase Input/Single-Phase Output)
Frequency	50/60 Hz
Load Capacity	8.3/8.6/10kW
Input Plug	NEMA L15-30P
Input Cord Length	PDU3VN3L1530: 3 ft., PDU3VN6L1530B: 6 ft., PDU3VN10L1530: 10 ft.
Outlets	48 (42 C13 / 6 C19)
Primary Mounting Option	0U (Vertical) Rack Mount
Shipping Weight	PDU3VN3L1530: 23 lb. PDU3VN6L1530B: 22 lb. PDU3VN10L1530: 23 lb.
Unit Weight & Dimensions	PDU3VN3L1530: 14.9 lb. / 70 x 2.17 x 2.86 in. PDU3VN6L1530B: 14.9 lb. / 70 x 2.17 x 2.86 in. PDU3VN10L1530: 14.9 lb. / 70 x 2.17 x 2.86 in. <i>See next page for detailed unit measurements.</i>
Certifications	Tested to UL/CAN 60950-1 (US & Canada), NOM (Mexico), FCC Class A, RoHS, TAA Compliant

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.








- Distributes power to 48 outlets (14 C13 and 2 C19 per phase)
- Remote monitoring and control via SNMP, Web or telnet
- Displays load for any output phase in real time
- Perfect for rack-mount server, network and telecom applications

**SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS**



1111 W. 35th Street  
Chicago, IL 60609 USA  
773.869.1234  
www.tripplite.com

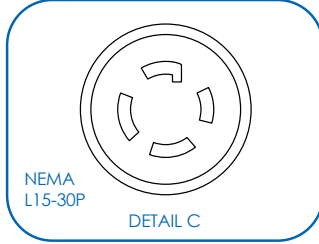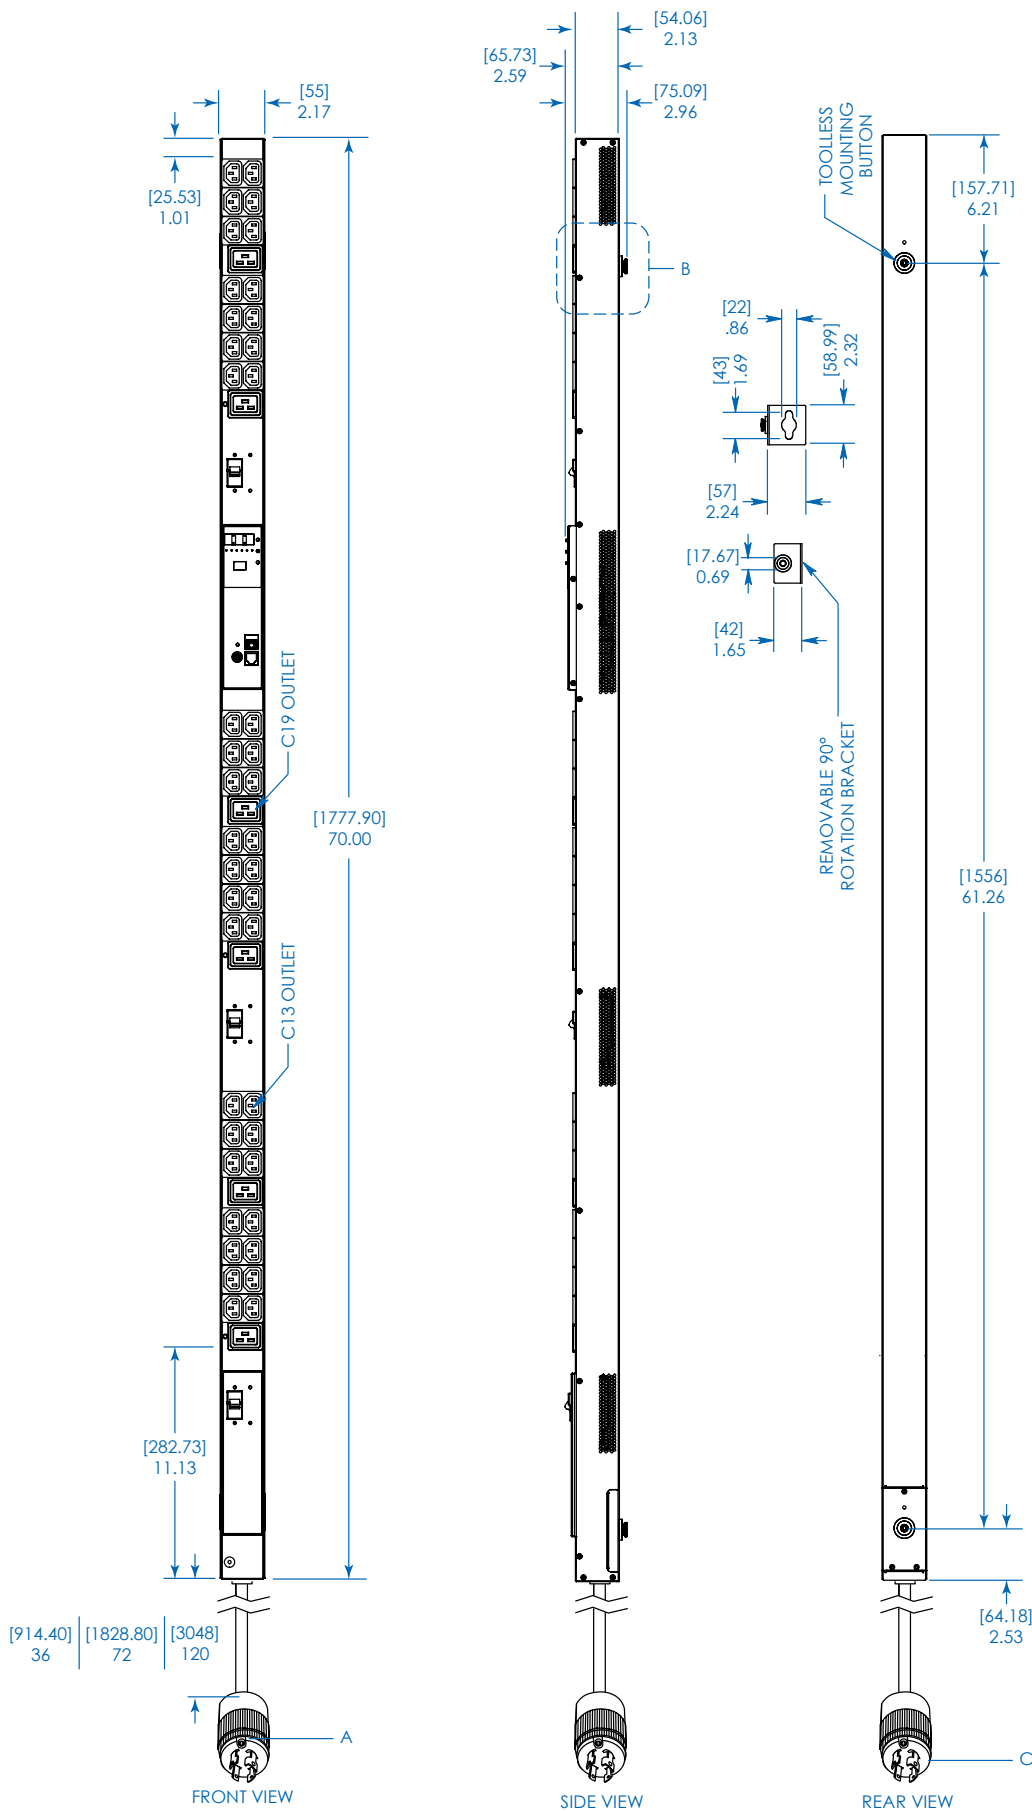

MODELS:  
**PDU3VN3L1530,**  
**PDU3VN6L1530B,**  
**PDU3VN10L1530**



1111 W. 35th Street  
 Chicago, IL 60609 USA  
 773.869.1234  
 www.tripplite.com

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.