



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## 11.5kW 3-Phase Monitored PDU, 200/220/230/240V Outlets (42 C13, 6 C19), IEC309 16/20A Red, 360-415V input, 0U, TAA

MODEL NUMBER: PDU3XVN6G20

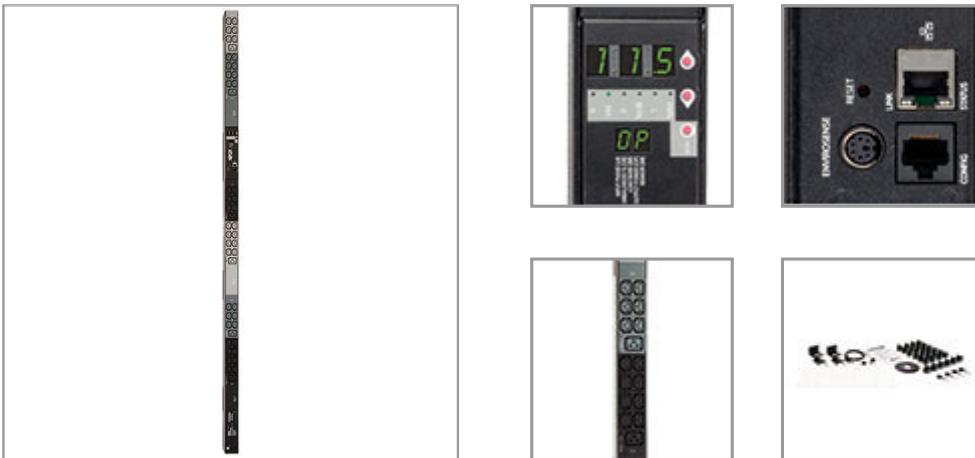

### Description

Tripp Lite 3 phase Monitored PDU / Power Distribution Unit offers real-time remote monitoring of voltage and load levels via built-in network connection. PowerAlert interface supports custom notification of user-specified remote conditions via email, secure web, SNMP, Telnet or SSH interface. PDU output current consumption in amps is displayed per-phase via front panel lighted digital display and can be monitored remotely to warn of potential overloads before critical IT mains breakers trip.

### Features

- 11.5kW Monitored 360/380/400/415V input 200/220/230/240V output PDU with built-in web/network interface
- IEC309 16/20A Red (3P+N+E) 360-415V 3 phase input with 6 ft. / 1.8m line cord
- 0U, 70 inch / 178cm vertical form factor
- 48 200-240V outlets (42 C13, 6 C19) in 3 single phase load banks
- Lighted display with scroll-button reports power consumption in amps for all 3 loading banks, IP-address self-identification and 180 degree display rotation for overhead or raised floor power feeds
- Built-in SNMP/ethernet interface reports voltage and PDU loading per-phase via network or secure web browser interface with options for user specified alarm and notification thresholds
- Supports in-rack environmental reporting with optional ENVIROSENSE temperature / humidity sensor and rack access notification with up to 4 optional SRSWITCH door sensors
- DHCP/Manual configuration support
- 10/100 Mbps auto-sensing allows optimal communication with 10/100 Base-T networks
- Real-time clock backup maintains the time of day and date even if the PDU is unpowered
- Tiered access privileges allow an administrator and a guest to login via web browser for monitoring

### Highlights

- Monitored 11.5kW 3-Phase 360/380/400/415V input 200/220/230/240V output PDU
- Reports voltage & load per-phase via ethernet interface
- 1% billing-grade accuracy; Digital display reports detailed status and loading information
- 70in / 1778mm 0U vertical format; Toolless button-mount installation
- 42 C13 & 6 C19 single phase outlets; Plug-lock cable retention inserts keep power cables secure
- IEC309 16/20A Red (3P+N+E) 3 phase input; 6 ft. / 1.8m line cord
- TAA Compliant

### Package Includes

- Monitored PDU with pre-installed mounting buttons
- Plug-lock C14 and C20 cable retention inserts
- Spare installation buttons (2 9mm / 4 6mm), Mounting brackets
- Configuration cable
- Owner's manual





- Alert notifications via email or SNMP traps offer immediate event notification
- Firmware upgrade ability supports future product enhancements
- Supports HTTP, HTTPS, PowerAlert Network Management System, SMTP, SNMPv1, SNMPv2, SNMPv3, Telnet, SSH, FTP, DHCP, BOOTP, NTP protocols
- Fully compatible with FREE PowerAlert Network Management System / NMS Software
- Included set of plug-lock inserts keep C14 & C20 power cords solidly connected to PDU outlets
- Toolless mounting supported in button-mount compatible racks, plus nut-and-bolt mounting brackets for other mounting applications (set of 2 9mm buttons pre-installed, 2 9mm and 4 6mm spare buttons included)
- Federal Trade Agreements Act / TAA Compliant for GSA Schedule purchases

## Specifications

OVERVIEW	
UPC Code	037332182975
PDU Type	Monitored
OUTPUT	
Output Capacity Details	11.5kW (415/240V), 11.1kW (400/230V), 10.5kW (380/220V) total capacity; 16A max per output phase (L1-L2, L2-L3, L3-L1); 16A max per C19 outlet; 12A max (10A CE) max per C13 outlet
Frequency Compatibility	50 / 60 Hz
Output Receptacles	(42) C13; (6) C19
Output Nominal Voltage	220 (380V input); 230 (400V input); 240 (415V input)
Overload Protection	n/a
INPUT	
PDU Input Voltage	380; 400; 415
Recommended Electrical Service	16A 400/230V with IEC309 16A Red (3P+N+E) outlet; 20A 415/240V with IEC309 20A Red (3P+N+E) outlet
Maximum Input Amps	16
PDU Plug Type	IEC-309 16/20A RED (3P+N+E)
Input Cord Length (ft.)	6
Input Cord Length (m)	1.83
Input Phase	3-Phase
USER INTERFACE, ALERTS & CONTROLS	
Reported Load Segments	Supports local monitoring of current for each input phase (L1, L2 and L3) and output current for each output load bank (16A balanced max per B1, B2 and B3); Outlets are color-coded and labeled for phase and load bank identification; L1-N feeds black outlets (B1); L2-N feeds dark-gray outlets (B2); L3-N feeds light-gray outlets (B3)



Front Panel LCD Display	Large digital display reports Amperage, Kilowatts, Voltage, Unbalance percentage, Temperature* and Humidity* information (*requires ENVIROSENSE option); Small digital display provides detail on the measurement the large display is reporting: Input-phase (L#), Load bank (B#), Sensor (S#), Load unbalance (UB), Output power (OP)
Front Panel LEDs	Set of 6 LEDs identify the value displayed on the large digital display: Amperage (A), Kilowatts (kW), Voltage (V), Unbalance percentage (%UB), Temperature (T), Humidity (%RH); One additional LED for each output load bank (B1-B3) offers information power availability: GREEN (<80% load), YELLOW (>80% load), RED (Power OFF), RED FLASHING (Power OFF/breaker trip)
Switches	Set of UP/DOWN arrow buttons scroll through available Input, Bank, Power, Load balance and Sensor options; Additional MODE button
<b>PHYSICAL</b>	
Shipping Dimensions (hwd / in.)	75.870 x 9.650 x 6.890
Shipping Dimensions (hwd / cm)	192.71 x 24.51 x 17.50
Shipping Weight (lbs.)	20.2600
Shipping Weight (kg)	9.19
Unit Dimensions (hwd / in.)	70 x 2.17 x 2.86
Unit Dimensions (hwd / cm)	177.8 x 5.51 x 7.3
Unit Weight (lbs.)	13.50
Unit Weight (kg)	6.12
Material of Construction	Metal
Form Factors Supported	Vertical rackmount installation supported with included mounting brackets; supports toolless mounting in button-mount compatible racks
PDU Form Factor	Vertical (0U)
<b>ENVIRONMENTAL</b>	
Operating Temperature Range	32 to 122F (0 to 50C)
Storage Temperature Range	5 to 140F (-15C to 60C)
Relative Humidity	5 to 95% non-condensing
Operating Elevation (ft.)	0-10,000
Operating Elevation (m)	0-3000
<b>CERTIFICATIONS</b>	
Certifications	Tested to UL60950-1 (USA), CSA (Canada), NOM (Mexico), CE (EN 60950-1), CE / FCC Class A (Emissions), RoHS (Hazardous Substances), TAA Compliant
<b>WARRANTY</b>	
Product Warranty Period (Worldwide)	2-year limited warranty

© 2018 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies: <https://www.tripplite.com/products/product-certification-agencies>