



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## 3.8kW Single-Phase Dual-Circuit 120V Basic PDU, 40 NEMA 5-15/20R Outlets, NEMA L5-20P/5-20P Inputs, 10 ft. Cords, 0U

MODEL NUMBER: PDU40TDUAL

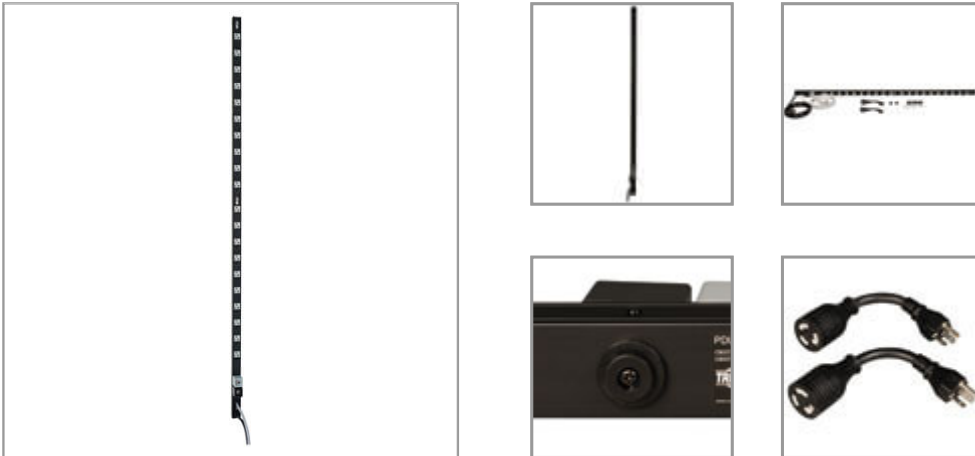

Dual-circuit PDU ideal for delivering 120V single-phase AC power to servers and networking equipment with dual redundant power supplies or any application that requires high capacity in a compact form factor.

### Description

The PDU40TDUAL 3.8kW Single-Phase Dual-Circuit 120V Basic PDU works as two independent PDUs in a single housing, perfect for networking, telecom, security, audio/video and sound reinforcement applications. Ideal for high-density network equipment with dual redundant input cables, it features 40 NEMA 5-15/20R outlets split evenly into two separate power circuits.

Each power circuit, including its input plug, power cord, breaker and outlets, is color-coded black or gray for easy identification. Both 10-foot power cords feature NEMA L5-20P input plugs and come with optional adapters to convert them to NEMA 5-20P plugs, which are not color-coded. Connect the plugs to separate mains input power sources, generators or protected UPS systems to distribute AC power to connected equipment.

The switchless design prevents an accidental shutdown, which could lead to costly downtime. Dual 20A circuit breakers protect connected equipment from dangerous overloads. The 70-inch all-metal housing supports toolless 0U vertical mounting in EIA-standard 19-inch racks, as well as on a wall or workbench or under a counter with user-supplied hardware.

### Features

#### Dual Single-Phase PDUs in a Single Housing

- Ideal for high-density network equipment with dual redundant input cables
- 40 NEMA 5-15/20R outlets in 2 breakered power circuits
- 70 in. all-metal housing

### Highlights

- Functions as 2 independent 20A PDUs in one housing
- Dual NEMA L5-20P/5-20P inputs with 10 ft. (3 m) cords
- 40 NEMA 5-15/20R outlets in 2 separate circuits
- Switchless design prevents accidental shutdown
- Supports toolless 0U vertical button-mounting

### Package Includes

- PDU40TDUAL 3.8kW Single-Phase Dual-Circuit 120V Basic PDU
- (2) NEMA L5-20P to NEMA 5-20P Plug Set Adapters
- Mounting Hardware
- Owner's Manual



#### Dual Input Connectors

- NEMA L5-20P input plugs with 10 ft. cords
- Included adapters convert plugs to NEMA 5-20P, if desired
- Plugs connect to separate external AC power sources

#### Dual Independent Power Circuits

- Circuits include input plug, power cord, circuit breaker and outlets
- Color-coded black or gray for easy identification
- 20A circuit breakers protect outlets against overloads

#### Switchless Design

- Prevents accidental shutdowns and costly downtime

#### Versatile Installation Options

- Supports toolless 0U vertical mounting in EIA-standard 19 in. racks
- Also mounts on wall, workbench or under a counter with user-supplied hardware

## Specifications

OVERVIEW	
UPC Code	037332128409
PDU Type	Basic
OUTPUT	
Output Capacity Details	3.8kW total - 1.9kW per circuit (120V); 4.0kW total - 2.0kW per circuit (127V); 3.2kW total - 1.6kW per circuit (100V); 40A maximum total - 20A maximum per circuit (Agency de-rated to 32A continuous total, 16A per circuit); 16A max per 5-15/20R outlet
Frequency Compatibility	50 / 60 Hz
Output Receptacles	(40) 5-15/20R
Output Receptacle Details	20 grey-color outlets are powered via the grey-color input cable; 20 black-color outlets are powered via the black-color input cable
Output Nominal Voltage	100; 120; 127
Overload Protection	2 x 20A circuit breakers; Grey-color circuit breaker protects grey-color outlets; Black-color circuit breaker protects black-color outlets
INPUT	
PDU Input Voltage	100; 120; 127
Recommended Electrical Service	Two 20A 120V circuits
Maximum Input Amps	40



Maximum Input Amps Details	20A maximum per circuit (Agency de-rated to 16A per circuit continuous)
PDU Plug Type	NEMA 5-20P; NEMA L5-20P
Input Cord Details	Set of two input power cords; Grey-color input cord powers grey-color outlets; Black-color input cord powers black-color outlets
Input Cord Length (ft.)	10
Input Cord Length (m)	3.05
Input Phase	Single-Phase
<b>USER INTERFACE, ALERTS &amp; CONTROLS</b>	
Switches	n/a
<b>PHYSICAL</b>	
Shipping Dimensions (hwd / in.)	2.00 x 4.40 x 71.50
Shipping Dimensions (hwd / cm)	5.08 x 11.18 x 181.61
Shipping Weight (lbs.)	10.40
Shipping Weight (kg)	4.72
Unit Dimensions (hwd / in.)	70 x 1.5 x 3
Unit Dimensions (hwd / cm)	177.8 x 3.8 x 7.6
Unit Weight (lbs.)	9
Unit Weight (kg)	4.08
Material of Construction	Metal
Form Factors Supported	Zero U vertical rackmount, wallmount, raceway, workbench and more
PDU Form Factor	Vertical (0U)
<b>ENVIRONMENTAL</b>	
Storage Temperature Range	5 to 122F (-15 to 50C)
Relative Humidity	5 to 95% non-condensing
Operating Elevation (ft.)	0-10,000
Operating Elevation (m)	0-3000
<b>CERTIFICATIONS</b>	
Certifications	Tested to UL60950-1 (USA), CSA (Canada), RoHS compliant
<b>WARRANTY</b>	
Product Warranty Period (Worldwide)	2-year limited warranty



**Tripp Lite**  
1111 W. 35th Street  
Chicago, IL 60609 USA  
Telephone: 773.869.1234  
[www.tripplite.com](http://www.tripplite.com)

Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies:

<https://www.tripplite.com/products/product-certification-agencies>