



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




## PowerAlert Console Launcher

SNMPWEBCARDSNMPWEBCARD

# 7.4kW Single-Phase Monitored PDU, 230V Outlets (36 C13 & 6 C19), IEC-309 32A Blue, 10ft Cord, 0U Vertical, TAA

MODEL NUMBER: PDUMNV32HV2

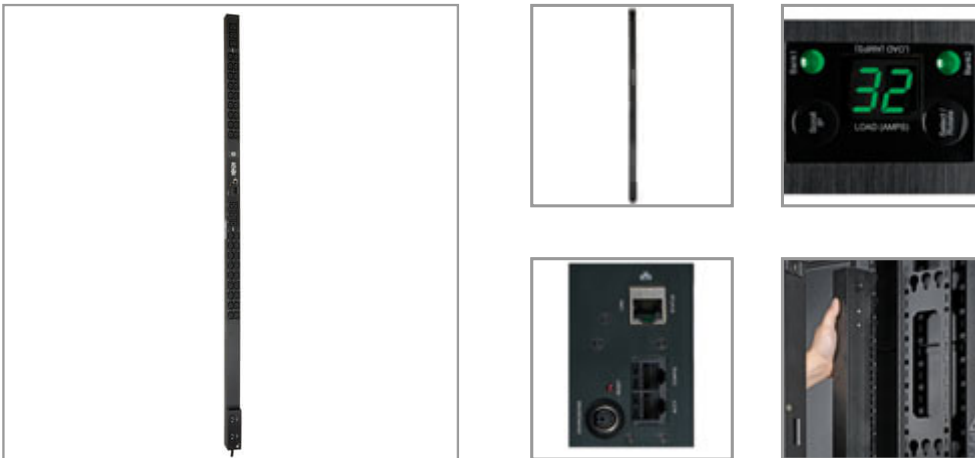

## Description

Tripp Lite single phase Monitored PDU / Power Distribution Unit offers real-time remote monitoring of voltage, frequency and load levels via built-in network connection. PowerAlert interface supports custom notification of user-specified remote conditions via email, PowerAlert Console Launcher, SNMP, Telnet or SSH interface. PDU lighted digital display enables visual monitoring of PDU output current to prevent circuit overloads as additional equipment is added. Offers reliable rackmount multi-outlet power distribution from any protected UPS, generator or mains input power source. High quality design includes rugged all-metal housing and secure rackmount installation with included mounting accessories.

## Features

- 32A single phase 230V Monitored Power Distribution Unit / PDU
- Attached 3m / 10ft IEC-309 32A Blue (2P+E) input cable included
- 0U 178cm / 70in. vertical rackmount format
- 42 outlets (36 C13, 6 C19) in two separately breakered 20A output load banks
- Toolless installation supported in button-mount compatible equipment racks
- Bolt-down brackets support installation in other racks and additional surfaces
- Lighted display with select button reports output power consumption in amps in 3 segments (bank 1, bank 2 and total)
- Digital display also supports IP-address self-identification and 180 degree display rotation
- Built-in SNMP/ethernet interface reports voltage, frequency and PDU loading via network interface or PowerAlert Console Launcher with options for user specified alarm and notification thresholds

## Highlights

- Monitored 32A 230V PDU in 0U 178cm / 70 in. vertical rackmount format
- Reports voltage, frequency and load level via ethernet interface
- Visual current meter, Toolless button-mount installation
- IEC-309 32A Blue (2P+E) input plug with 3m / 10ft line cord
- 42 outlets (36 C13, 6 C19) with included plug-lock cord retention sleeves
- Temperature, humidity and contact-closure monitoring options
- TAA Compliant

## Package Includes

- Rackmount PDU
- Plug-lock cord retention sleeves
- Rack mounting brackets
- Owner's manual



- Supports in-rack environmental reporting with optional ENVIROSENSE temperature / humidity sensor and rack access notification with up to 4 optional SRSWITCH door sensors
- DHCP/Manual configuration support
- 10/100 Mbps auto-sensing allows optimal communication with 10/100 Base-T networks
- Real-time clock backup maintains the time of day and date even if the PDU is unpowered
- Tiered access privileges allow an administrator and a guest to login for simultaneous monitoring
- Alert notifications via email or SNMP traps offer immediate event notification
- Firmware upgrade ability supports future product enhancements.
- Supports HTTP, HTTPS, PowerAlert Network Management System, SMTP, SNMPv1, SNMPv2, SNMPv3, Telnet, SSH, FTP, DHCP, BOOTP, NTP protocols
- Fully compatible with FREE PowerAlert Network Management System / NMS Software
- Included cord retention brackets keep vital network equipment plugged in and continuously powered
- Federal Trade Agreements Act / TAA Compliant for GSA Schedule purchases

## Specifications

| OVERVIEW                          |  |
|-----------------------------------|--|
| UPC Code                          | 037332181718   |
| PDU Type                          | Monitored  |
| OUTPUT                            |  |
| Output Capacity Details           | 7.7kW (240V), 7.4kW (230V), 7kW (220V), 6.7kW (208V), 6.4kW (200V) / 32A total capacity; 16A max per breakered outlet bank; 16A max per C19 outlet; 10A max per C13 outlet |
| Frequency Compatibility           | 50 / 60 Hz   |
| Output Receptacles                | (36) C13; (6) C19  |
| Output Nominal Voltage            | 200; 208; 220; 230; 240  |
| Overload Protection               | Two 20A circuit breakers protect 21 outlets each   |
| INPUT                             |  |
| PDU Input Voltage                 | 200; 208; 220; 230; 240  |
| Recommended Electrical Service    | 32A 230V   |
| Maximum Input Amps                | 32   |
| PDU Plug Type                     | IEC-309 32A BLUE (2P+E)  |
| Input Cord Length (ft.)           | 10   |
| Input Cord Length (m)             | 3.05   |
| Input Phase                       | Single-Phase   |
| USER INTERFACE, ALERTS & CONTROLS |  |



**Tripp Lite**  
1111 W. 35th Street  
Chicago, IL 60609 USA  
Telephone: 773.869.1234  
www.tripplite.com

|                                     |  |
|-------------------------------------|--|
| Front Panel LCD Display             | Digital meter reports PDU output current in amps, Scroll IP-address information; Display can be rotated 180 degrees for installation with the input cable at the top   |
| Front Panel LEDs                    | Front panel LEDs indicate which loading segment the digital LCD current display is reporting; Bank 1 LED indicates the meter is reporting load level for outlets 1-21; Bank 2 LED indicates the meter is reporting load level for outlets 22-42; Both LEDs lighted indicates the meter is reporting load level for all outlets combined                                    |
| Switches                            | Press the SCROLL IP button and release to display the configured IP address in 2 digit intervals; Press the SELECT / ROTATE button and release after one second to advance the local display power consumption for the 3 reported segments: Bank 1, Bank 2 and Banks 1+2; Press the SELECT / ROTATE button and release after two seconds to rotate the display 180 degrees |
| <b>PHYSICAL</b>                     |  |
| Shipping Dimensions (hwd / in.)     | 5.200 x 6.400 x 73.000   |
| Shipping Dimensions (hwd / cm)      | 13.21 x 16.26 x 185.42   |
| Shipping Weight (lbs.)              | 14.7000  |
| Shipping Weight (kg)                | 6.67   |
| Unit Dimensions (hwd / in.)         | 70 x 2.2 x 2.65  |
| Unit Dimensions (hwd / cm)          | 177.8 x 5.6 x 6.7  |
| Unit Weight (lbs.)                  | 9.7  |
| Unit Weight (kg)                    | 4.40   |
| Material of Construction            | Metal  |
| Form Factors Supported              | 0U vertical rackmount installation supported with included mounting brackets; supports toolless mounting in button-mount compatible racks  |
| PDU Form Factor                     | Vertical (0U)  |
| <b>ENVIRONMENTAL</b>                |  |
| Storage Temperature Range           | 5 to 122F (-15 to 50C)   |
| Relative Humidity                   | 5-95% non-condensing   |
| Operating Elevation (ft.)           | 0-10,000   |
| Operating Elevation (m)             | 0-3000   |
| <b>COMMUNICATIONS</b>               |  |
| SNMP Compatibility                  | Pre-installed <a href="http://www.tripplite.com/SNMP-Web-Management-Accessory-Card-SmartPro-SmartOnline-UPS-Systems~SNMPWEBCARD">SNMPWEBCARD</a> provides remote monitoring via PowerAlert Console Launcher, Telnet, SSH, and SNMP management systems  |
| <b>CERTIFICATIONS</b>               |  |
| Certifications                      | Tested to IEC60950-1 (CE), Class A (Emissions), RoHS compliant, TAA Compliant  |
| <b>WARRANTY</b>                     |  |
| Product Warranty Period (Worldwide) | 2-year limited warranty  |



**Tripp Lite**  
1111 W. 35th Street  
Chicago, IL 60609 USA  
Telephone: 773.869.1234  
[www.tripplite.com](http://www.tripplite.com)

not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies:

<https://www.tripplite.com/products/product-certification-agencies>