

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







# Common Mode EMI Suppression Inductors







- Low profile or vertical mounting available
- Windings balanced within one percent
- For use in switching power supply input filter circuits
- Dielectric strength 1250 VRMS
- Designed with 3.0mm minimum creep distance between windings


| Electrical Specifications @ 25°C - Operating Temperature -40°C to +125°C |                      |                       |                           |       |                            |                      |                       |                  |         |                               |                   |
|--|----------------------|-----------------------|---------------------------|-------|----------------------------|----------------------|-----------------------|------------------|---------|-------------------------------|-------------------|
| Low Profile  | Vertical             | Rated<br>RMS          | Load<br>VA at<br>RMS Line |       | Inductance                 | Test Level           | Leakage<br>Inductance | DCR<br>Max. each | Package | Lead Diameter<br>Inches ±.003 |                   |
| Part<br>Number   | Mount Part<br>Number | <b>Current</b> (AMPs) | 117 V                     | 220 V | <b>at 1kHz</b><br>(mH MIN) | Volts RMS<br>1.0 kHz | 130kHz<br>(µH MIN)    | WDG<br>(Ω)       | Number  | Low<br>Profile                | Vertical<br>Mount |
| PE-62891NL   | PE-62911NL           | 1.8                   | 210                       | 420   | 10.0                       | 0.50                 | 130                   | 0.240            | 1       | 0.032                         | 0.032             |
| PE-62892NL   | PE-62912NL           | 3.5                   | 400                       | 800   | 3.0                        | 0.20                 | 35                    | 0.060            | 1       | 0.032                         | 0.032             |
| PE-62893NL   | PE-62913NL           | 6.0                   | 700                       | 1400  | 1.0                        | 0.08                 | 12                    | 0.020            | 1       | 0.036                         | 0.036             |
| -  | PE-62914NL           | 2.6                   | 300                       | 600   | 16.0                       | 1.00                 | 180                   | 0.160            | 2       | 0.032                         | 0.040             |
| PE-62895NL   | PE-62915NL           | 3.2                   | 375                       | 750   | 8.0                        | 0.50                 | 90                    | 0.120            | 2       | 0.032                         | 0.040             |
| PE-62896NL   | PE-62916NL           | 5.2                   | 600                       | 1200  | 4.0                        | 0.20                 | 45                    | 0.040            | 2       | 0.036                         | 0.036             |
| PE-62897NL   | PE-62917NL           | 7.5                   | 875                       | 1750  | 2.0                        | 0.08                 | 25                    | 0.020            | 2       | 0.047                         | 0.047             |

#### Notes:


- 1. Rated RMS current for 40°C rise at any input voltage.
- 2. **Caution** do not exceed rated RMS current ratings.
- 3. To order a RoHS compliant part, add the suffix "**NL**" to the part number (i.e. PE-62891 becomes PE-62891**NL**).

# Mechanical Schematic

### **PE-6289XNL**

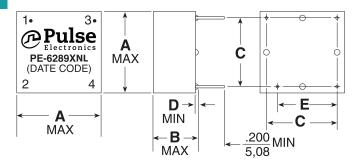

| Package<br>Number | A     | В           | C           | D           | E           |
|-------------------|-------|-------------|-------------|-------------|-------------|
| 1                 | 1.25  | <u>.600</u> | <u>.100</u> | <u>.015</u> | <u>.900</u> |
|                   | 31,75 | 15,24       | 25,40       | 0,38        | 22,86       |
| 2                 | 1.50  | <u>.800</u> | <u>1.28</u> | <u>.010</u> | 1.083       |
|                   | 38,10 | 20,32       | 32,51       | 0,25        | 27,50       |



**Dimensions:**  $\frac{\text{Inche}}{\text{mm}}$ 

Unless otherwise specified, all tolerances are  $\pm \frac{.010}{0.25}$ 

USA 858 674 8100 Germany 49 7032 7806 0 Singapore 65 6287 8998 Shanghai 86 21 62787060 China 86 755 33966678


P592.B (06/15)

Taiwan 886 3 4356768

# Common Mode EMI **Suppression Inductors**

## **Mechanical** (continued)

### **PE-6291XNL**

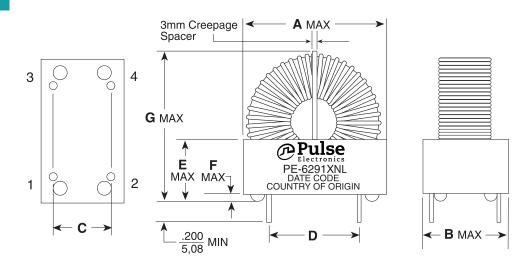

Inches **Dimensions:** Unless otherwise specified, all tolerances are  $\pm$ 

| Package<br>Number | A     | В           | C           | D           | E          | F           | G     |
|-------------------|-------|-------------|-------------|-------------|------------|-------------|-------|
| 1                 | 1.15  | <u>.560</u> | <u>.400</u> | <u>.800</u> | <u>.45</u> | <u>.015</u> | 1.15  |
|                   | 29,21 | 14,22       | 10,15       | 20,32       | 11,43      | 0,38        | 29,21 |
| 2                 | 1.44  | <u>.800</u> | <u>.600</u> | <u>.900</u> | <u>.70</u> | .030        | 1.50  |
|                   | 36,57 | 20,32       | 15,24       | 22,86       | 17,78      | 0,76        | 38,10 |

## For More Information

| Pulse Worldwide         |
|-------------------------|
| Headquarters            |
| 12220 World Trade Drive |
| San Diego, CA           |
| 07178                   |

92128 U.S.A.

Tel: 858 674 8100

**Pulse Europe** Einsteinstrasse 1

D-71083 Herrenberg Germany

Tel: 49 7032 7806

#### **Pulse China Headquarters**

B402, Shenzhen Academy of Aerospace Technology Bldg. 10th Kejinan Road High-Tech Zone Nanshan District Shenzen, PR China 518057

### **Pulse North China**

Room 2704/2705 Super Ocean Finance Ctr. 2067 Yan An Road West Shanghai 200336 China

#### **Pulse South Asia**

135 Joo Seng Road #03-02 PM Industrial Bldg. Singapore 368363

Tel: 65 6287 8998 Fax: 65 6287 8998

#### **Pulse North Asia**

3F, No. 198 Zhongyuan Road Zhongli City Taoyuan County 320 Taiwan R. O. C. Tel: 886 3 4356768 Fax: 886 3 4356823 (Pulse)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2015. Pulse Electronics, Inc. All rights reserved.

