



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# SMT POWER INDUCTORS

## Unshielded Drum Core - PF0382NL Series



- Height:** 11.3mm Max
- Footprint:** 13.0mm x 9.4mm Max
- Current Rating:** up to 4.9A
- Inductance Range:** 10 $\mu$ H to 1000 $\mu$ H
- RoHS compliant version available on request**


### Electrical Specifications @ 25°C — Operating Temperature -40°C to +125°C <sup>7</sup>

Part <sup>5,6</sup> Number	Inductance <sup>1</sup> @ Irated <sup>2</sup> ( $\mu$ H TYP)	Irated <sup>2</sup> (A)	DCR (m $\Omega$ MAX)	Inductance @ 0Aac ( $\mu$ H $\pm$ 20%)	Saturation <sup>3</sup> Current Isat (A)	Heating <sup>4</sup> Current Ibc (A)
PF0382.103NL	9	4.90	24	10	8.30	4.90
PF0382.153NL	14	4.20	31	15	7.10	4.20
PF0382.223NL	20	3.50	47	22	5.60	3.50
PF0382.333NL	30	3.10	65	33	4.30	3.10
PF0382.473NL	42	2.70	90	47	3.80	2.70
PF0382.683NL	61	1.90	130	68	3.10	1.90
PF0382.104NL	90	1.50	200	100	2.60	1.50
PF0382.154NL	140	1.20	280	150	2.10	1.20
PF0382.224NL	200	1.10	360	220	1.70	1.10
PF0382.334NL	297	0.80	580	330	1.35	0.80
PF0382.474NL	423	0.60	860	470	1.15	0.60
PF0382.684NL	612	0.50	1200	680	1.05	0.50
PF0382.105NL	900	0.20	2000	1000	0.85	0.20

- NOTES:**
- Inductance at Irated is a typical inductance value measured when the inductor is subjected to the rated current.
  - The rated current as listed is either the saturation current at 25°C or the heating current, depending on which value is lower.
  - The saturation current Isat is the current which causes the inductance to drop by 10% (typical) at an ambient temperature of 25°C. This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effects) to the component.
  - The heating current Ibc is the DC current which causes the temperature rise of the part to increase by approximately 40°C. This current is determined by mounting the component on a typical application PCB and applying the current to the device for 30 minutes.
  - Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. PF0382.103NL becomes PF0382.103NLT). Pulse complies to industry standard tape and reel specification EIA481.
  - The "NL" suffix indicates an RoHS-compliant part number. Non-NL suffixed parts are not necessarily RoHS compliant, but are electrically and mechanically equivalent to NL versions. If a part number does not have the "NL" suffix, but an RoHS compliant version is required, please contact Pulse for availability.
  - The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.

## Mechanical

## Schematic

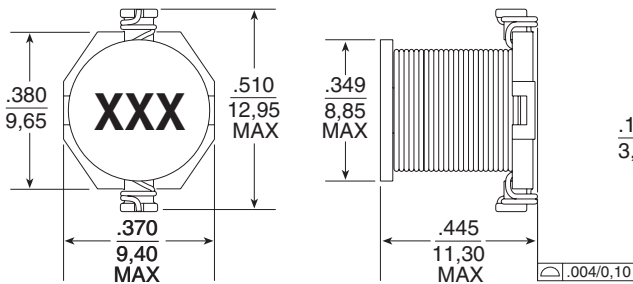

Weight . . . . . 2.5 grams  
Tape & Reel . . . . . 280/reel

Dimensions: Inches  
mm

Unless otherwise specified, all tolerances are  $\pm$  .010 / 0.25

### SUGGESTED PAD LAYOUT

