



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# PF2470 Series

TO-247 Power Thin Film Resistors

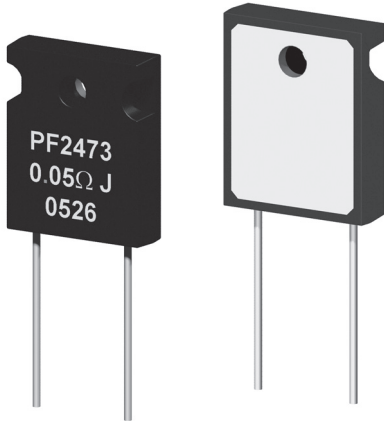

- TO-247 Housing
- Rated Power to 140 Watts
- Resistances from 0.02 to 51K Ohms
- High Stability Film Resistance Elements
- Resistance Tolerance to  $\pm 1\%$
- Low Inductance ( <math>< 50\text{nH}</math> )
- Isolated Back Plate

## SPECIFICATIONS

Type	Power Rating		Thermal Resistance	Resistance Range <sup>3</sup>		Tolerances	Temperature Coefficients
	Heatsink <sup>1</sup>	Free Air <sup>2</sup>		Min	Max		
PF2473	140W	5W	0.9°C/W	0.02Ω	51KΩ	$\pm 1\%$ ( $R \geq 0.10\Omega$ ) $\pm 5\%$	$\pm 50\text{ppm}/^\circ\text{C}$ ( $R \geq 10\Omega$ ) $\pm 100\text{ppm}/^\circ\text{C}$ ( $0.1\Omega \leq R < 10\Omega$ ) $\pm 250\text{ppm}/^\circ\text{C}$ ( $R < 0.1\Omega$ )
PF2472	100W	3W	1.3°C/W	0.02Ω	51KΩ	$\pm 1\%$ ( $R \geq 0.10\Omega$ ) $\pm 5\%$	$\pm 50\text{ppm}/^\circ\text{C}$ ( $R \geq 10\Omega$ ) $\pm 100\text{ppm}/^\circ\text{C}$ ( $0.1\Omega \leq R < 10\Omega$ ) $\pm 250\text{ppm}/^\circ\text{C}$ ( $R < 0.1\Omega$ )

<sup>1</sup> Power rating based on 25°C Flange Temperature  
<sup>2</sup> Power rating based on 25°C Ambient Temperature  
<sup>3</sup> Consult Factory for Higher or Lower Values

Specification	Value	
Temperature Range	-55°C to +155°C	
Dielectric Strength	2500 VAC	
Max. Operating Voltage	700 V or $\sqrt{P \cdot R}$ , whichever is less	
Insulation Resistance	>1000 Meg-Ohm	
Environmental Performance	$\Delta R$	Test Conditions
Load Life	$\pm 1\% + 0.05\Omega$	25°C, 90 min ON, 30 min OFF, 1000 hr
Humidity Resistance	$\pm 1\% + 0.05\Omega$	40°C, 90-95% RH, DC 0.1W, 1000 hr
Temperature Cycle	$\pm 0.25\% + 0.05\Omega$	-55°C for 30 min, +155°C for 30 min, 1000 hr
Solder Heat	$\pm 0.1\% + 0.05\Omega$	+350°C, 3s
Vibration	$\pm 0.25\% + 0.05\Omega$	IEC60068-2-6




# PF2470 Series

TO-247 Power Thin Film Resistors



## SPECIFICATIONS (continued)

Power Derating Curve

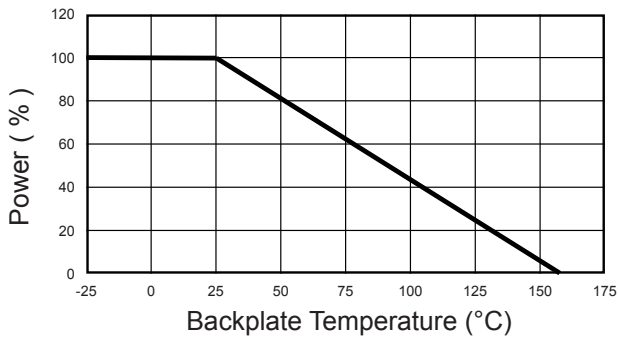


### Power Rating Notes -

The PF2470 Series Thin Film Resistors must be attached to a suitable heatsink. The maximum internal resistor temperature is 155°C (120°C for the PF2201).

To specify an appropriate heatsink use the following formula :

$$R_{\theta H} = \frac{T_{MAX} - (P \times R_{\theta R}) - T_A}{P}$$

Where:  $R_{\theta H}$  = Thermal Resistance of Heatsink ( °C/W )  
 $R_{\theta R}$  = Thermal Resistance of Resistor ( °C/W )  
 $T_{MAX}$  = Maximum Temperature of Resistor  
 $T_A$  = Ambient Temperature of Heatsink ( °C )  
 $P$  = Power Through Resistor ( W )

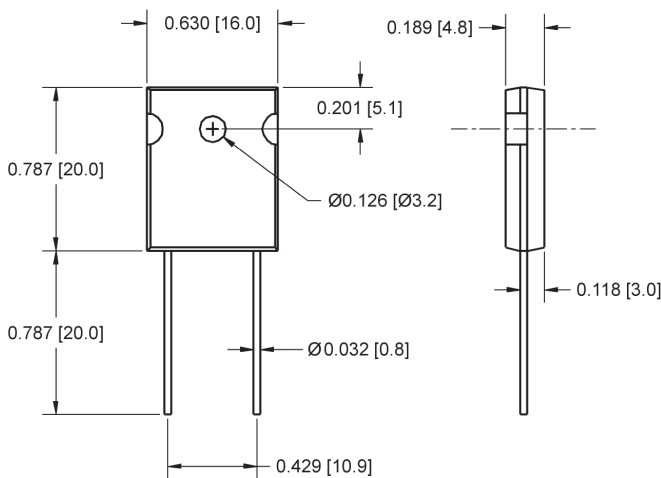

### Mounting Notes -

The PF2470 Series Thin Film Resistors must be attached to a suitable heatsink. Mount resistor using thermal grease to a clean, flat surface. Use a compression washer to provide 150 to 300 pounds ( 665 to 1330N ) of mounting force. Torque mounting screw to 8 in-lbs ( 0.9 N-m ).

Back plate is isolated from both pins.

## Ordering Information

Part Number - Resistance - Tolerance - TCR  
 Example: PF2472 10 Ohm 1% 50ppm