



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES :

1. UL LISTED AND CSA CERTIFIED AFTER HEAT SHRINKING FOR:
 - A. 600 V MAX. VOLTAGE RATING
 - B. 257°F (125°C) MAX. TEMP. RATING
 - C. STRANDED COPPER WIRE ONLY (SEE CHART FOR WIRE RANGE)
2. MATERIAL :
 - A. TERMINAL - TIN PLATED COPPER WITH BRAZED SEAM
 - B. INSULATOR - HEAT SHRINKABLE POLYOLEFIN WITH HOT MELT SEALANT
3. MINIMUM SHRINK TEMPERATURE: 300°F (150°C)
4. ALL DIMENSIONS SHOWN ARE NOMINAL. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS.
5. INSTALLATION TOOL: CT-310

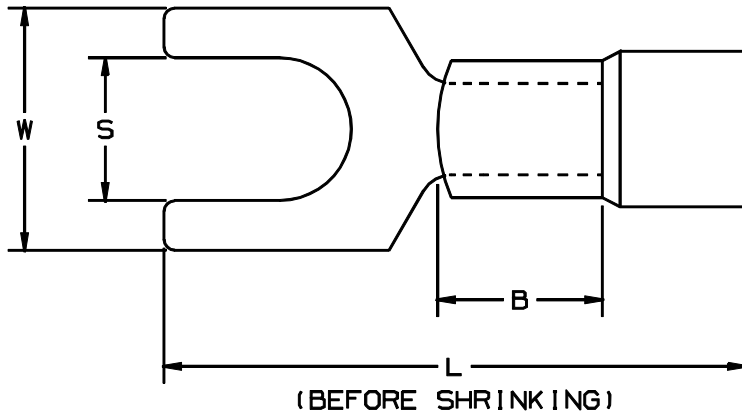

LISTED
587H
E52164



CERTIFIED
73971

PANDUIT PART NUMBER	WIRE RANGE (AWG)	STUD SIZE S	DIMENSIONS			MAX WIRE INSULATION DIA	INSULATION COLOR	STD PKG QTY	BULK PKG QTY
			B	W	L				
PH18-6F	22-18	#6	.250 (6.35)	.32 (8.13)	1.04 (26.42)	.170 (4.32)	RED	25	500
PH18-8F	22-18	#8	.250 (6.35)	.32 (8.13)	1.04 (26.42)	.170 (4.32)	RED	25	500
PH18-10F	22-18	#10	.250 (6.35)	.32 (8.13)	1.04 (26.42)	.170 (4.32)	RED	25	500
PH14-6F	16-14	#6	.250 (6.35)	.38 (9.65)	1.07 (27.18)	.190 (4.83)	BLUE	25	500
PH14-8F	16-14	#8	.250 (6.35)	.38 (9.65)	1.07 (27.18)	.190 (4.83)	BLUE	25	500
PH14-10F	16-14	#10	.250 (6.35)	.38 (9.65)	1.07 (27.18)	.190 (4.83)	BLUE	25	500
PH10-8F	12-10	#8	.250 (6.35)	.38 (9.65)	1.20 (30.48)	.240 (6.10)	YELLOW	20	200
PH10-10F	12-10	#10	.250 (6.35)	.38 (9.65)	1.20 (30.48)	.240 (6.10)	YELLOW	20	200

A41455_01

PANDUIT CORP.

TINLEY PARK, ILLINOIS

01 1/01 RM FILESPEC WAS NPC-A41455-00

00 2/90 DL RELEASED

HEAT SHRINK INSULATED
FORK TERMINALS

REV	DATE	BY	CHK	DESCRIPTION	QA	CUST	PM	APP	DRAWN BY	CHK'D	SCALE	DRAWING NO.
									DRL		NONE	A41455