



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




PHS SERIES

Phase Control



Wiring Diagram



Triac Output Device
V = Voltage
L = Load
RT = External Adjustment

Ordering Information

MODEL	INPUT VOLTAGE	RATING
PHS120A10	120VAC	10A
PHS120A20	120VAC	20A
PHS120A6	120VAC	6A
PHS230A10	230VAC	10A
PHS230A20	230VAC	20A
PHS230A6	230VAC	6A

If you don't find the part you need, call us for a custom product 800-843-8848

Description

The PHS Series is an ideal method of changing lamp intensity, varying the speed of a fan/motor, or controlling the temperature of a heater. The effective output voltage is adjusted with an accessory external potentiometer suitable for line voltage applications.

Operation

Upon application of input voltage, effective output voltage can be varied by changing the external resistance value. As the external resistance increases, the effective output voltage decreases. The inverse is also true.

Features & Benefits

FEATURES	BENEFITS
External adjustment - 230VAC rated potentiometer	Allows control of heavy loads directly, solid state design will provide long life
Up to 20A steady state - 200A inrush	Allows control of heavy loads directly, solid state design will provide long life
Single hole surface mounting	Provides quick and easy installation

Accessories



P1004-174 (100kΩ 1W), **P1004-175** (200kΩ 2W)
Versa-Pot
Panel mountable, industrial potentiometer recommended for remote time delay adjustment.



P0700-7 Versa-Knob
Designed for 0.25 in. (6.35 mm) shaft of Versa-Pot. Semi-gloss industrial black finish.



P1015-64 (AWG 14/16)
Female Quick Connect
These 0.25 in. (6.35 mm) female terminals are constructed with an insulator barrel to provide strain relief.



P1015-18 Quick Connect to Screw Adapter
Screw adapter terminal designed for use with all modules with 0.25 in. (6.35 mm) male quick connect terminals.

PHS SERIES

Specifications

Output

Type

Rating

Variable voltage phase angle control

Steady State (at 100% On)	Inrush*
1A	10A
6A	60A
10A	100A
20A	200A

Minimum Load Current

100mA

Voltage Drop

≅ 2.0V at rated current

Input

Voltage

120 or 230VAC

Tolerance

±20%

AC Line Frequency

50/60Hz

Protection

Dielectric Breakdown

≥ 2000V RMS terminals to mounting surface

Insulation Resistance

≥100MΩ

Mechanical

Mounting *

Surface mount with one #10 (M5 x 0.8) screw

Dimensions

H 50.8 mm (2"); **W** 50.8 mm (2");

D 38.4 mm (1.51")

Termination

0.25 in. (6.35 mm) male quick connect terminals

Environmental

Operating/Storage

Temperature

-20° to 60°C / -40° to 85°C

Humidity

95% relative, non-condensing

Weight

1A: ≅ 2.4 oz (68 g)

6, 10, & 20A: ≅ 3.9 oz (111 g)

External Adjustment

Potentiometer

120VAC


100KΩ rated at 1W

230VAC

200KΩ rated at 2W

Must have insulation resistance suitable for line voltage applications.

Typical Output Waveform

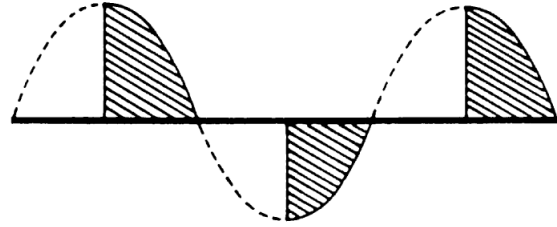

*Units rated ≥ 6A must be bolted to a metal surface using the included heat sink compound. The maximum mounting surface temperature is 90°C. Inrush: Non-repetitive for 16ms.