



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



PI3EQX1204-B

3.3V, 12.5Gbps 4 channel SAS3/SATA3/XAUI ReDriver with Pin Strap and I²C control

Pericom Semiconductor's PI3EQX1204-B is a SAS3/SAS2/SATA3/10GE, 4 differential channels ReDriver™. The device provides programmable equalization, output swing, pre-shoot, and de-emphasis by either pin strapping option or I²C Control, to optimize performance over a variety of physical mediums by reducing Inter-symbol interference.

PI3EQX1204-B supports four 100-Ohm Differential CML data I/O's and extends the signals across other distant data pathways on the user's platform.

The integrated equalization circuitry provides flexibility with signal integrity of the signal before the ReDriver, whereas the integrated de-emphasis and pre-shoot circuitry provides flexibility with signal integrity of the signal after the ReDriver.


Applications

Servers, storage

Features

- Support up to 12.5Gbps serial link for SAS3, SAS2, SATA3, 10GE applications
- Supporting 4 differential channels
- Independent channel configuration of receiver equalization, output swing and pre-shoot/de-emphasis
- Per Channel Activity Detector with selectable input termination between 50Ω to V_{CC} and 200KΩ to V_{CC}
- Pin strap and I²C selectable device programming
- 3-bit selectable address bit for I²C
- Supply Voltage: 3.3V±0.3V
- Industrial Temperature Range: -40°C to 85°C
- Packaging (Pb-free & Green):
- 42-contact TQFN (9mm x 3.5mm)

Block Diagram

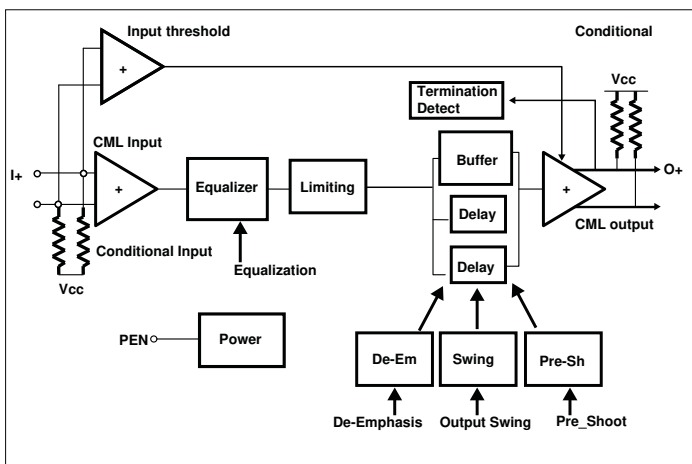

Application Diagram

