

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China













SIGNAL INTEGRITY SOLUTIONS

PI3EQX12902B

12.5Gpbs 1 Port/2 Channels PCIe3.0/SAS3/SATA3/10GE KR Combo ReDriver with Linear Equalization

Description

Pericom Semiconductor's PI3EQX12902B is a low power,high performance 12.5 Gbps 2 channels PCle3.0/SAS3/SATA3/10GE KR linear ReDriver $^{\text{TM}}$.

The device provides programmable equalization, linear swing and flat gain to optimize performance over a variety of physical mediums by reducing Inter-Symbol Interference.


PI3EQX12902B supports two 100Ω Differential CML data I/O's between the Protocol ASIC to a switch fabric, over cable, or to extend the signals across other distant data pathways on the user's platform.

The integrated equalization circuitry provides flexibility with signal integrity of the signal before and after the ReDriver.

Each channel operates fully independently. The channels' input signal level determines whether the output is active.

The PI3EQX12902B is a flexible, multi-protocol linear ReDriver designed to support new processor chipsets with dual protocol I/O pins, supporting PCle3 8Gbps/SAS3 12Gbps/SATA3 6Gbps speeds and connectors such as mSATA/M.2/U.2/SATAe. The PI3EQX12902B is also an excellent choice for single lane applications requiring low power and small package such as docking station connectivity.

Block Diagram

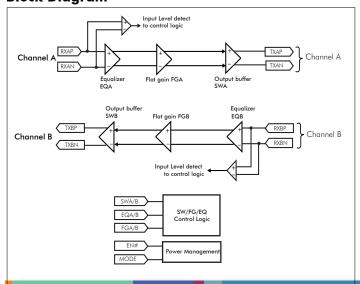

Features

- → 12.5Gbps serial link with linear equalizer.
- → Two 12.5Gbps differential signal pairs
- → Support SAS3/SATA3 and PCle3 protocols
- → Transparent to link training, OOB, Idle
- → Pin Adjustable Receiver Equalization
- → Pin Adjustable output linear swing
- → Pin Adjustable Flat Gain
- → 100Ω Differential CML I/O's
- → Auto reciever detection for adaptive power management
- → Auto "low power" mode for adaptive power management
- → Single Supply Voltage: 3.3V ± 0.3V
- → Industrial Temperature range: -40°C to 85°C
- → Packaging: (Pb-free & Green)
- → 30-pin, TQFN 2.5x4.5 mm (ZL30)

Applications

- → Notebook PC
- → Server motherboards
- → Rack server
- → JBOD storage
- → Blade server

