



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



PI3EQX8904

4-Channel PCIe 2.5/5/8Gbps ReDriver™ with Linear Equalization

Description

Pericom Semiconductor's PI3EQX8904 is a PCIe, 4 differential channels ReDriver™. The device provides programmable linear equalization, output swing and gain, by either pin strapping option or I2C Control, to optimize performance over a variety of physical mediums by reducing Inter-symbol interference.


PI3EQX8904 supports four 100-Ohm Differential CML data I/O's and extends the signals across other distant data pathways on the user's platform.

The programmable settings can be applied easily via pins, software (I2C) or loaded via an external EEPROM. When operating in the EEPROM mode, the configuration information is automatically loaded on power up, which eliminates the need for an external microprocessor or software driver.

Applications

- Personal Media Players
- Mobile Phones
- Tablet

Eye Diagram

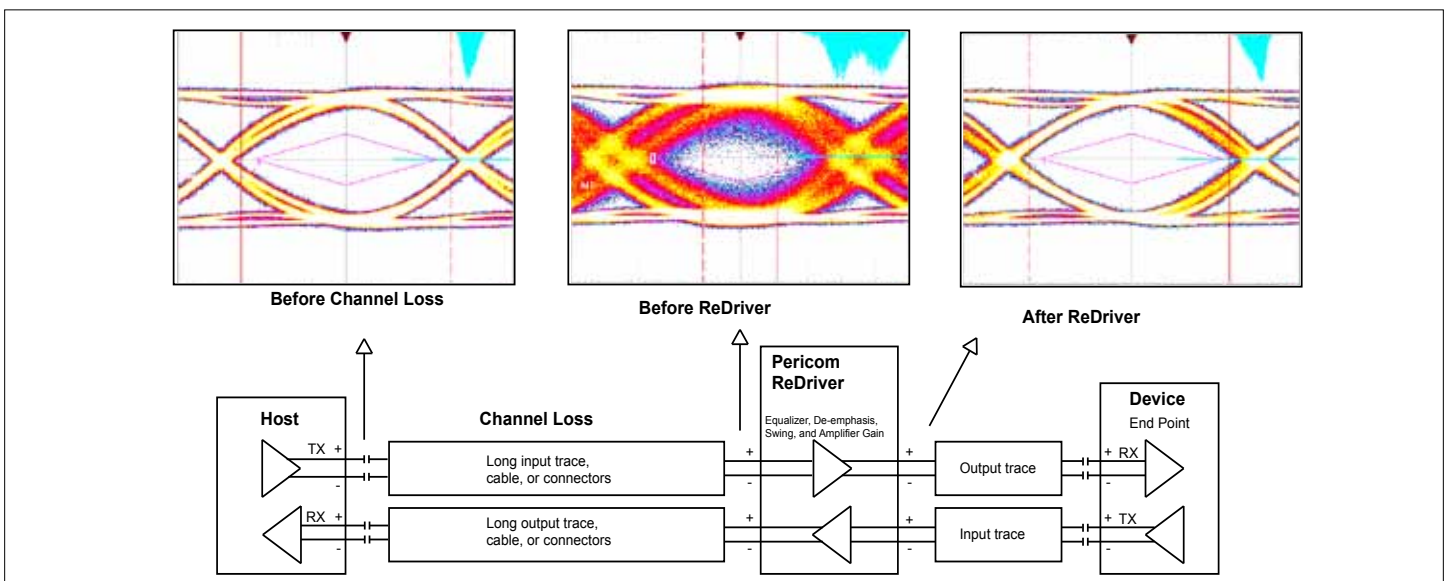

Features

- 2.5/5.0/8.0Gbps serial link with linear equalizer
- Support PCIe Gen 1/2/3 protocol
- Supporting 4 differential channels
- Independent channel configuration of receiver equalization, output swing and flat gain
- Per Channel Activity Detector with selectable input termination between 50Ω to V_{CC} and 200KΩ to V_{CC}
- Per Channel Output Termination Detector on power up with selectable output termination between 50Ω to V_{CC} and High impedance
- Very linear transfer function
- Fully compliant to PCI-SIG Link Training
- Single-ended mode receiver detection for PCIe
- Input Threshold detection
- Pin strap and I2C master/slave selectable device programming
- 4-bit selectable address bit for I2C
- Supply Voltage: 3.3V±0.3V
- Industrial Temperature Range: -40°C to 85°C
- Packaging (Pb-free & Green):
- 42-contact TQFN (9mm x3.5mm) - flowthrough pinout