



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Precision Wide-Bandwidth Analog Switch

### Features

- Rail-To-Rail operation
- Pin-compatible with 3125 Bus Switch & 74 series 125
- Single-Supply operation: 2V to 6V
- Low On-Resistance: 8Ω typical @ 5V
- Tight match between channels: 0.9Ω typical
- R<sub>ON</sub> flatness: 3Ω typical
- Low power consumption: 0.5μ-ohm typical
- High Speed, T<sub>ON</sub> = 8ns typical
- High-current channel capability: >100mA
- Wide bandwidth: >200 MHz
- Packaging (Pb-free & Green available):
  - 14-pin SOIC (W)
  - 16-pin QSOP (Q)

### Applications

- Instrumentation, ATE
- Audio Switching and Routing
- Telecommunications Systems
- Data Communications
- Battery-Powered Systems
- Replaces Mechanical Relays

### Description

Pericom Semiconductor's PI5A101 is an all-purpose analog switch designed for single-supply operation from +2V to +6V. This switch is ideal for audio, video, and data switching and routing.

The PI5A101 is a quad SPST (single-pole, single-throw) NC (normally closed) function.


When on, each switch conducts current equally well in either direction. When off, they block voltages up to the power-supply rails.

The PI5A101 is fully specified with +5V and +3.3V supplies. With +5V the R<sub>ON</sub> is 8Ω typical, making it ideal for replacing mechanical relays in data communications, test equipment, and instrumentation applications. Matching between channels is better than 2Ω. R<sub>ON</sub> flatness is better than 4Ω over the specified range.

These analog switches also offer wide bandwidth (>200 MHz high speed (T<sub>ON</sub> >15ns), and low charge injection (Q >10pC).

The PI5A101 is available in the narrow-body 14-pin small SOIC and 16-pin QSOP packages for operation over the industrial (-40°C to +85°C) temperature range.

### Pin Configurations

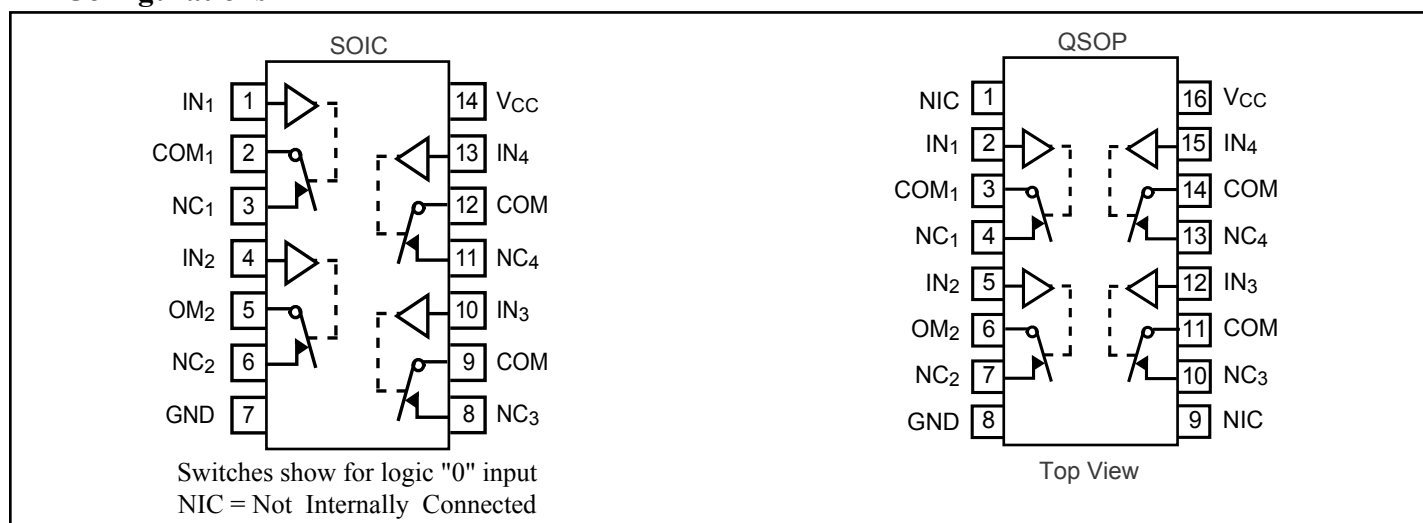

### Truth Table

Logic	Switch
0	ON
1	OFF

**Electrical Specifications - Single +5V Supply** ( $V_{CC} = +5V \pm 10\%$ ,  $GND = 0V$ ,  $V_{INH} = 2.4V$ ,  $V_{INL} = 0.8V$ )

Parameter	Symbol	Conditions	Temp.(°C)	Min. <sup>(1)</sup>	Typ. <sup>(2)</sup>	Max. <sup>(1)</sup>	Units
<b>Analog Switch</b>							
Analog Signal Range <sup>(3)</sup>	$V_{ANALOG}$		Full	0		$V_{CC}$	V
On-Resistance	$R_{ON}$	$V_{CC} = 4.5V$ , $I_{COM} = -30mA$ , $V_{NO}$ or $V_{NC} = +2.5V$	25		8	10	$\Omega$
On-Resistance Match Between Channels <sup>(4)</sup>	$\Delta R_{ON}$		Full			18	
On-Resistance Flatness <sup>(5)</sup>	$R_{FLAT(ON)}$	$V_{CC} = 5V$ , $I_{COM} = -30mA$ , $V_{NO}$ or $V_{NC} = 1V, 2.5V, 4V$	25		0.9	2	
			Full			4	
NO or NC Off Leakage Current <sup>(6)</sup>	$I_{NO(OFF)}$ or $I_{NC(OFF)}$	$V_{CC} = 5.5V$ , $V_{COM} = 0V$ , $V_{NO}$ or $V_{NC} = 4.5V$	25		0.05		nA
COM Off Leakage Current <sup>(6)</sup>	$I_{COM(OFF)}$		Full	-80		80	
COM On Leakage Current <sup>(6)</sup>	$I_{COM(ON)}$	$V_{CC} = 5.5V$ , $V_{COM} = +4.5V$ , $V_{NO}$ or $V_{NC} = \pm 0V$	25		0.05		
			Full	-80		80	
		$V_{CC} = 5.5V$ , $V_{COM} = +4.5V$ , $V_{NO}$ or $V_{NC} = +4.5V$	25		0.07		
			Full	-80		80	
<b>Logic Input</b>							
Input High Voltage	$V_{IH}$	Guaranteed logic High Level	Full	2			V
Input Low Voltage	$V_{IL}$	Guaranteed logic Low Level					
Input Current with Voltage High	$I_{INH}$	$V_{IN} = 2.4V$ , all others = 0.8V				0.8	$\mu A$
Input Current with Voltage Low	$I_{INL}$	$V_{IN} = 0.8V$ , all others = 2.4V		-1	0.005	1	

**Electrical Specifications - Single +5V Supply** ( $V_{CC} = +5V \pm 10\%$ ,  $GND = 0V$ ,  $V_{INH} = 2.4V$ ,  $V_{INL} = 0.8V$ ) (continued)

Parameter	Symbol	Conditions	Temp.(°C)	Min. <sup>(1)</sup>	Typ. <sup>(2)</sup>	Max. <sup>(1)</sup>	Units
<b>Dynamic</b>							
Turn-On Time	$t_{ON}$	$V_{CC} = 5V$ , see figure 1	25		8	15	ns
			Full			20	
Turn-Off Time	$t_{OFF}$		25		3.5	7	
			Full			10	
Charge Injection <sup>(3)</sup>	Q	$C_L = 1nF$ , $V_{GEN} = 0V$ , $R_{GEN} = 0V$ , Figure 2	25		7	10	pC
Off Isolation	$O_{IRR}$	$R_L = 50\Omega$ , $C_L = 5pF$ , $f = 10MHz$ , see figure 3			-55		dB
Crosstalk <sup>(8)</sup>	$I_{COM(OFF)}$	$R_L = 50\Omega$ , $C_L = 5pF$ , $f = 10MHz$ , see figure 4			-92		
NC or NO Capacitance	$C_{(OFF)}$	$f = 1kHz$ , see figure 5			8		pF
COM Off Capacitance	$C_{COM(OFF)}$				8		
COM On Capacitance	$C_{COM(ON)}$	$f = 1kHz$ , see figure 6			14		
3-dB Bandwidth	BW	$R_L = 10k\Omega$	Full		230		MHz
Distortion <sup>(9)</sup>	D				0.03		%
<b>Supply</b>							
Power-Supple Range	$V_{CC}$		Full	2		6	V
Positve Supply Current	$I_{CC}$	$V_{CC} = 3.6V$ , $V_{IN} = 0V$ or $V^+$ , All Channels on or off					1

### Absolute Maximum Ratings

Voltages Referenced to GND	
V <sub>CC</sub> .....	-0.5V to +7V
V <sub>IN</sub> , V <sub>COM</sub> , V <sub>NC</sub> <sup>(1)</sup> .....	-0.5V to V <sub>CC</sub> +2V
.....	or 30mA, whichever occurs first
Current (any terminal except COM, NO, NC).....	30mA
Current: COM, NO, NC (pulsed at 1ms, 10% duty cycle).....	120mA

### Thermal Information

Continuous Power Dissipation	
Narrow SO & QSOP (derate 8.7mW/°C above +70°C) .....	650mW
Storage Temperature .....	-65°C to +150°C
Lead Temperature (soldering, 10s) .....	+300°C

#### Notes

1. Signals on NC, COM, or IN exceeding V<sub>CC</sub> or GND are clamped by internal diodes. Limit forward diode current to 30mA.
2. Caution: Stresses beyond those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions beyond those indicated in the operational sections of this specification is not implied.

### Electrical Specifications-Single +3.3V Supply (V<sub>CC</sub> = +3.3V ± 10%, GND = 0V, V<sub>INH</sub> = 2.4V, V<sub>INL</sub> = 0.8V)

Parameter	Symbol	Conditions	Temp.(°C)	Min. <sup>(1)</sup>	Typ. <sup>(2)</sup>	Max. <sup>(1)</sup>	Units
<b>Analog Switch</b>							
Analog Signal Range <sup>(3)</sup>	V <sub>ANALOG</sub>		Full	0		V <sub>CC</sub>	V
On-Resistance	R <sub>ON</sub>	V <sub>CC</sub> = 3V, I <sub>COM</sub> = -30mA, V <sub>NO</sub> or V <sub>NC</sub> = 1.5V	25		7.2	18	Ω
On-Resistance Match Between Channels <sup>(4)</sup>	ΔR <sub>ON</sub>		Full			28	
On-Resistance Flatness <sup>(3,5)</sup>	R <sub>FLAT(ON)</sub>	V <sub>CC</sub> = 3.3V, I <sub>COM</sub> = -30mA, V <sub>NO</sub> or V <sub>NC</sub> = 0.8V, 2.5V	25		0.2	2	
			Full			4	
			25		2.72	10	
			Full			12	
<b>Dynamic</b>							
Turn-On Time	t <sub>ON</sub>	V <sub>CC</sub> = 3.3V, V <sub>NO</sub> or V <sub>NC</sub> = 1.5V, see figure 1	25		7	25	ns
			Full			40	
Turn-Off Time	t <sub>OFF</sub>		25		1	12	
			Full			20	
Charge Injection <sup>(3)</sup>	Q	C <sub>L</sub> = 1nF, V <sub>GEN</sub> = 0V, R <sub>GEN</sub> = 0Ω, Figure 2	25		1.6	10	pC
<b>Supply</b>							
Positive Supply Current	I <sub>CC</sub>	V <sub>CC</sub> = 3.6V, V <sub>IN</sub> = 0V or V <sub>CC</sub> , All Channels on or off	Full			1	μA


#### Notes:

1. The algebraic convention, where most negative value is a minimum and most positive is a maximum, is used in this data sheet.
2. Typical values are for DESIGN AID ONLY, not guaranteed or subject to production testing.
3. Guaranteed by design
4. ΔR<sub>ON</sub> = R<sub>ON</sub> MAX - R<sub>ON</sub> MIN
5. Flatness is defined as the difference between the maximum and minimum value of On-Resistance measured.
6. Leakage parameters are 100% tested at maximum rated hot temperature and guaranteed by correlation at +25°C.
7. Off Isolation = 20log<sub>10</sub> V<sub>B</sub> / V<sub>A</sub>. See Figure 3.
8. Between any two switches. See Figure 4.
9. D = R<sub>FLAT(ON)</sub>/R<sub>L</sub>.




Typical Operating Characteristics ( $T_A = +25^\circ\text{C}$ , unless otherwise noted)


$R_{ON}$  vs.  $V_{COM}$

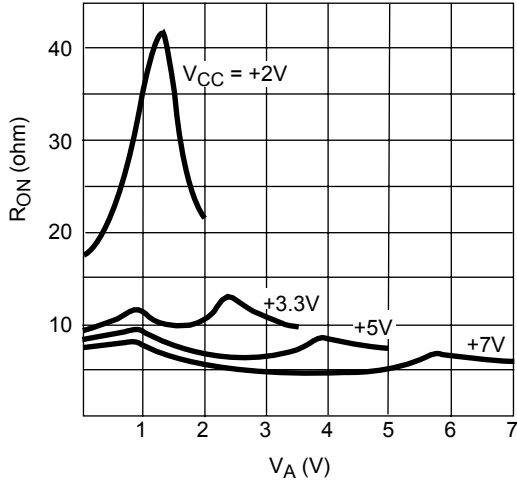


$R_{ON}$  vs.  $V_{COM}$  and Temperature

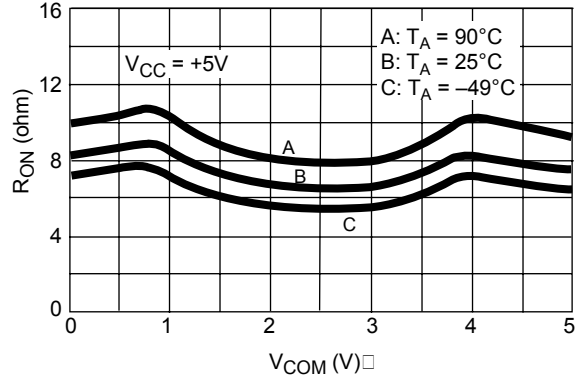


Leakage Currents vs. Analog Voltage

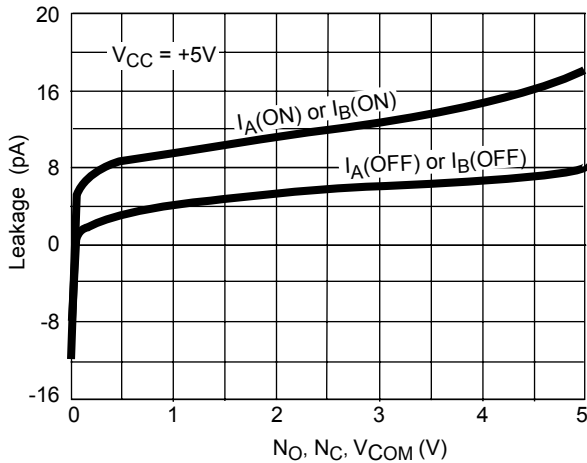


Leakage Current vs. Temperature

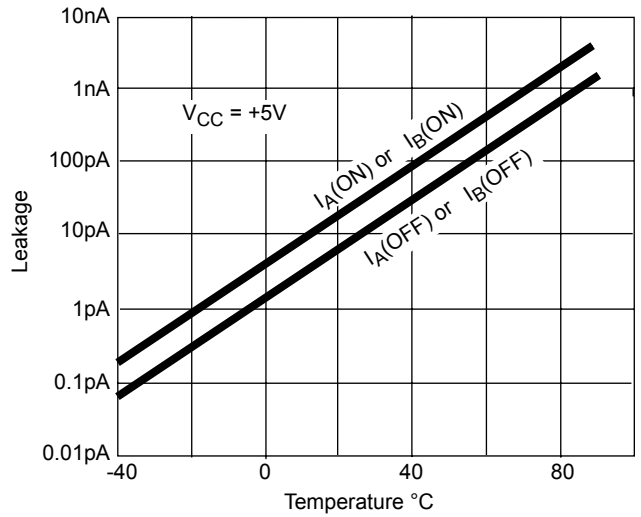


Charge Injection vs. Analog Voltage

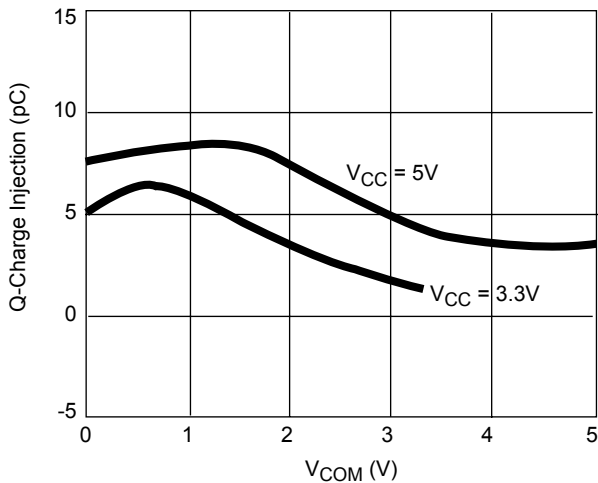


Crosstalk and Off-Isolation vs. Frequency

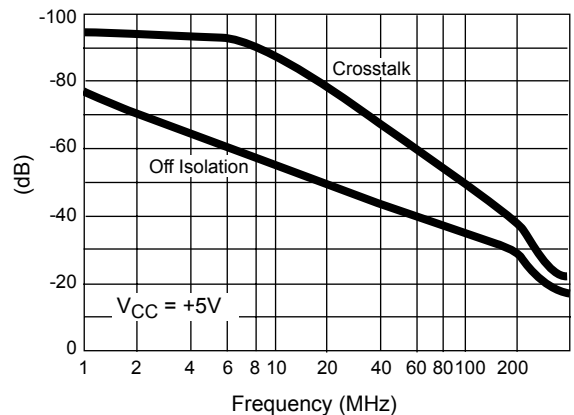


Insertion Loss vs. Frequency

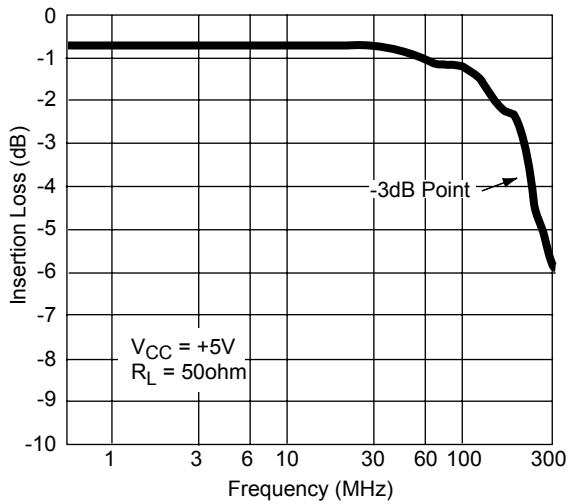


Input Switching Threshold vs. Supply Voltage

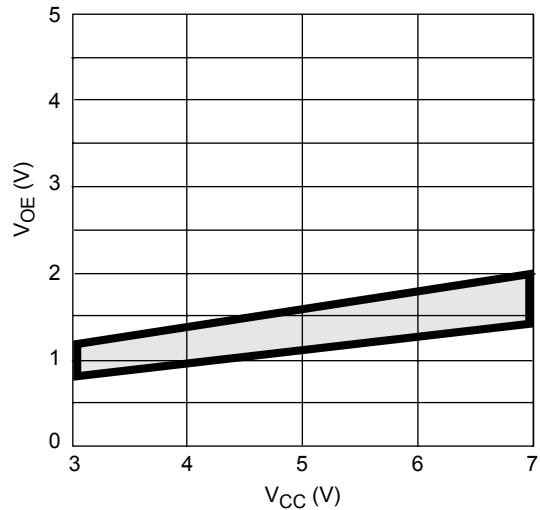


Switching Times vs.  $V_{CC}$

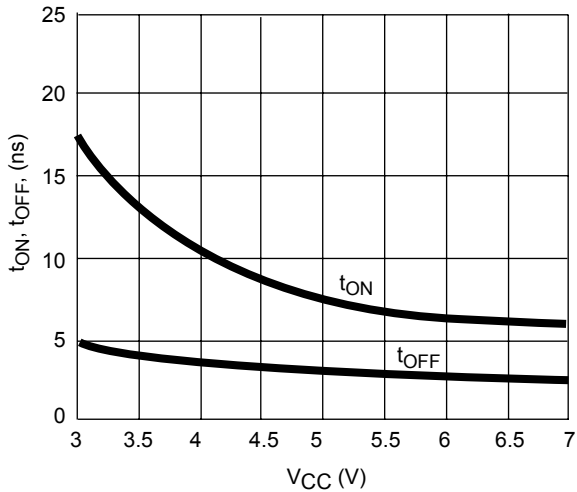


Switching Times vs. Temperature

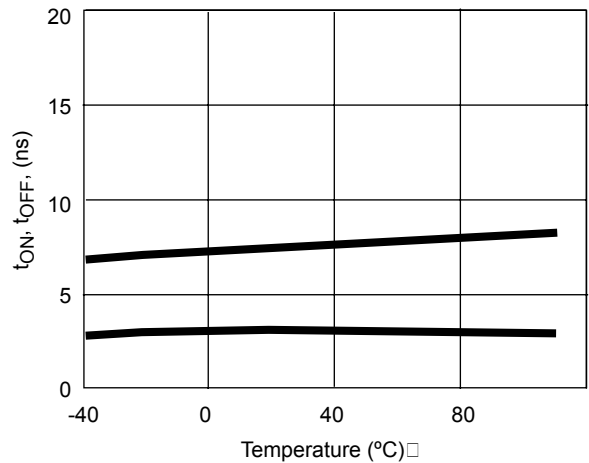

Supply Current vs. Temperature

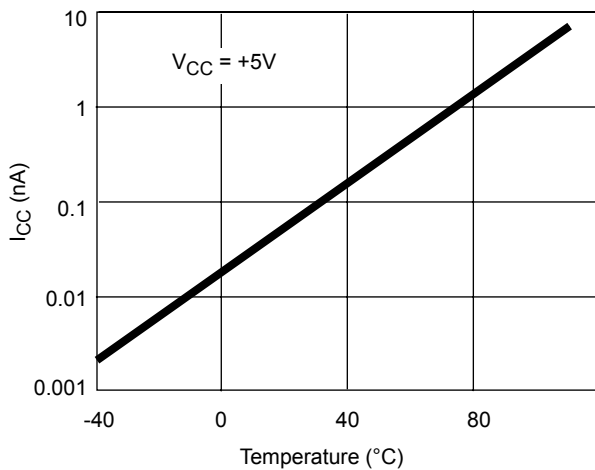

Supply Current vs. Input Switching Frequency

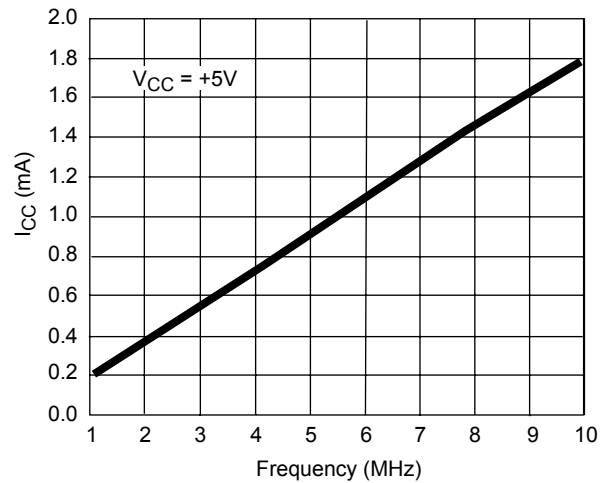

Test Circuits/Timing Diagrams

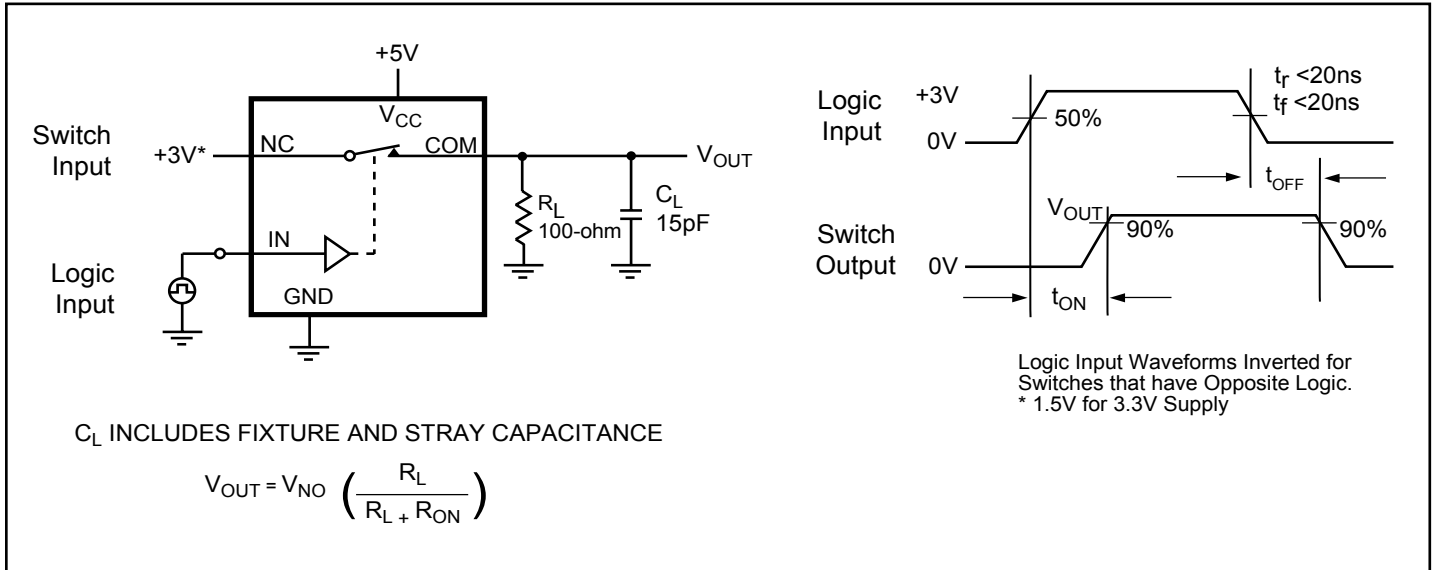


Figure 1. Switching Time


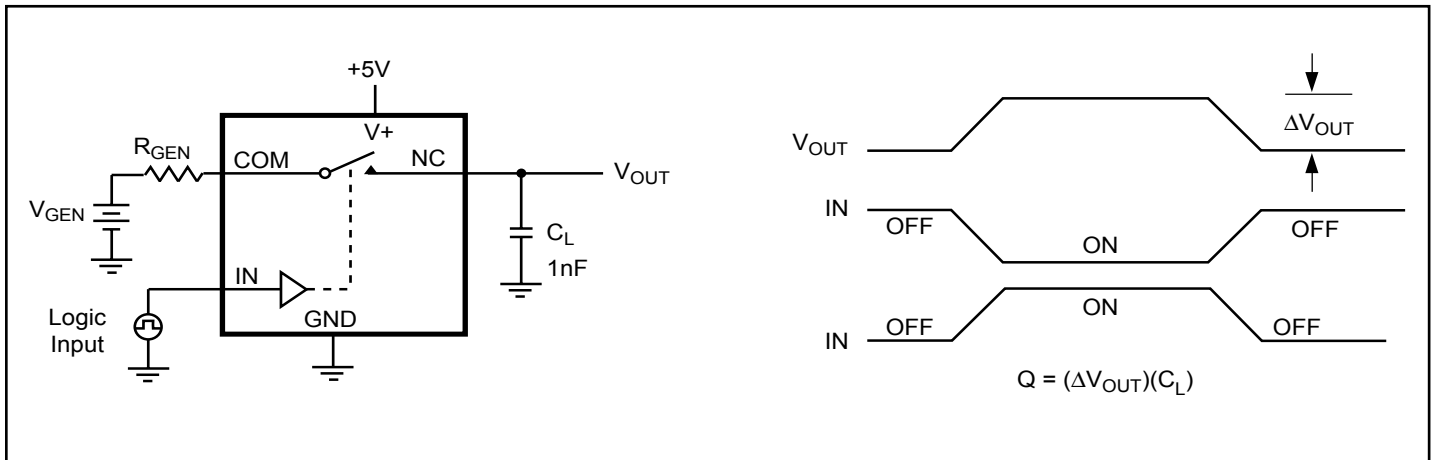



Figure 2. Charge Injection




**Test Circuits/Timing Diagrams** (continued)

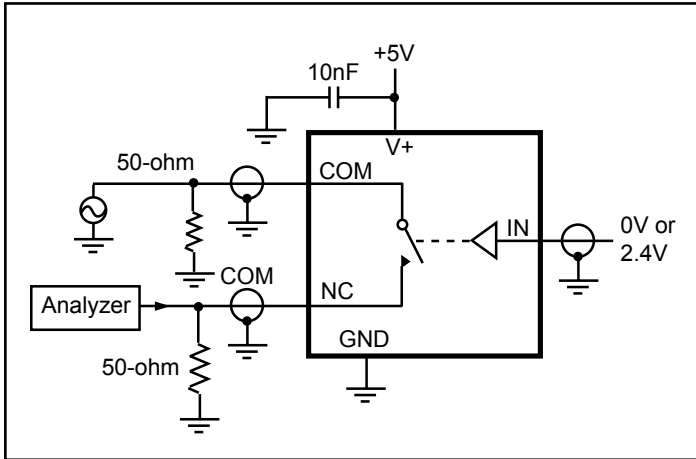


**Figure 3. Off Isolation**

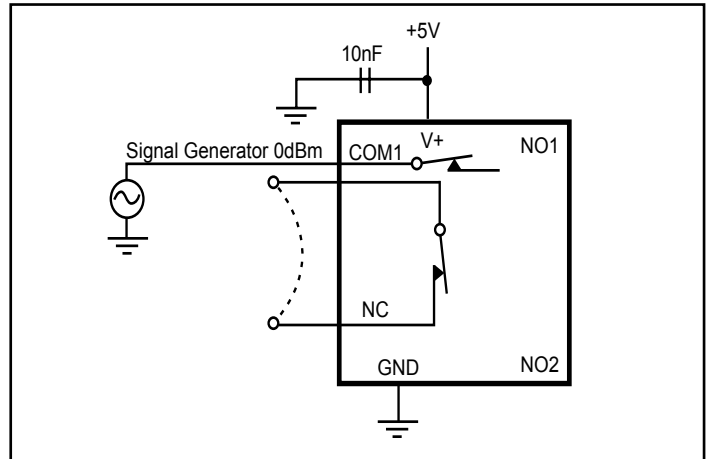


**Figure 4. Crosstalk**

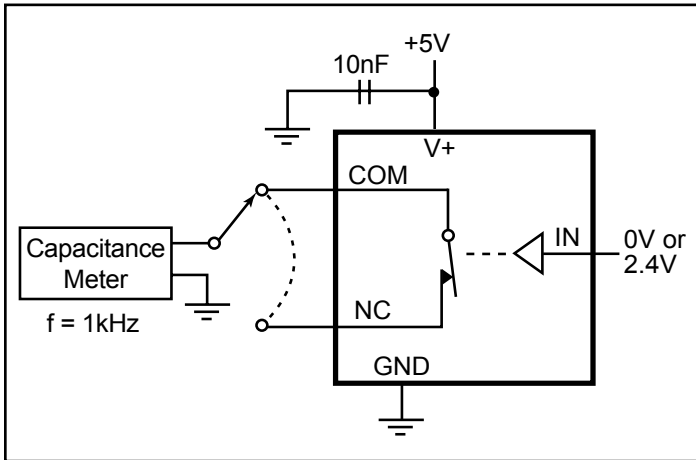

**Figure 5. Channel-Off Capacitance**

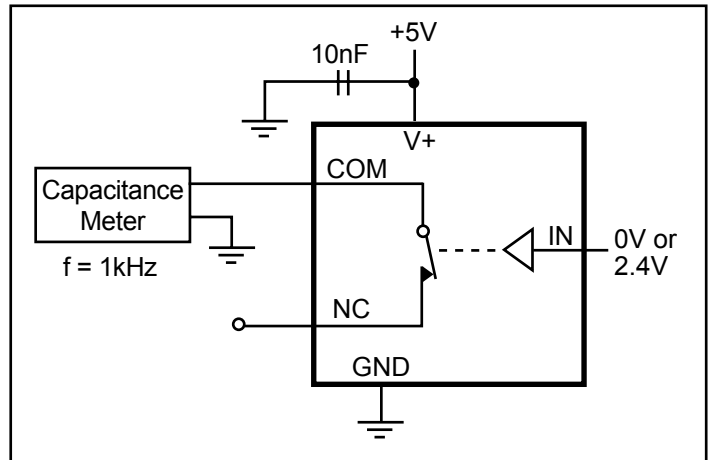


**Figure 6. Channel-On Capacitance**

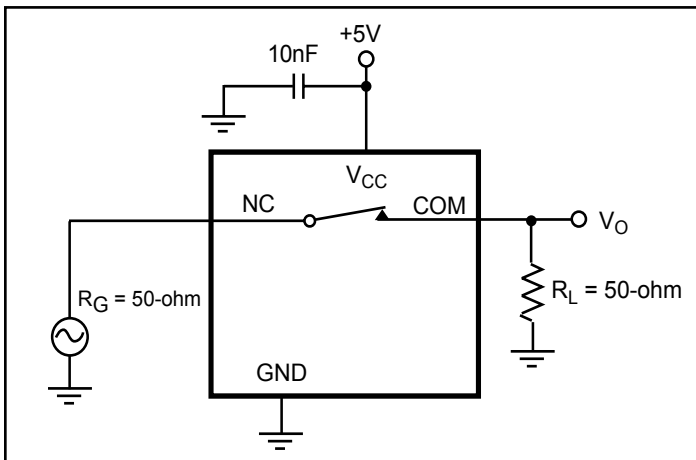


**Figure 7. Bandwidth**

Packaging Mechanical: 16-Pin, QSOP (Q)

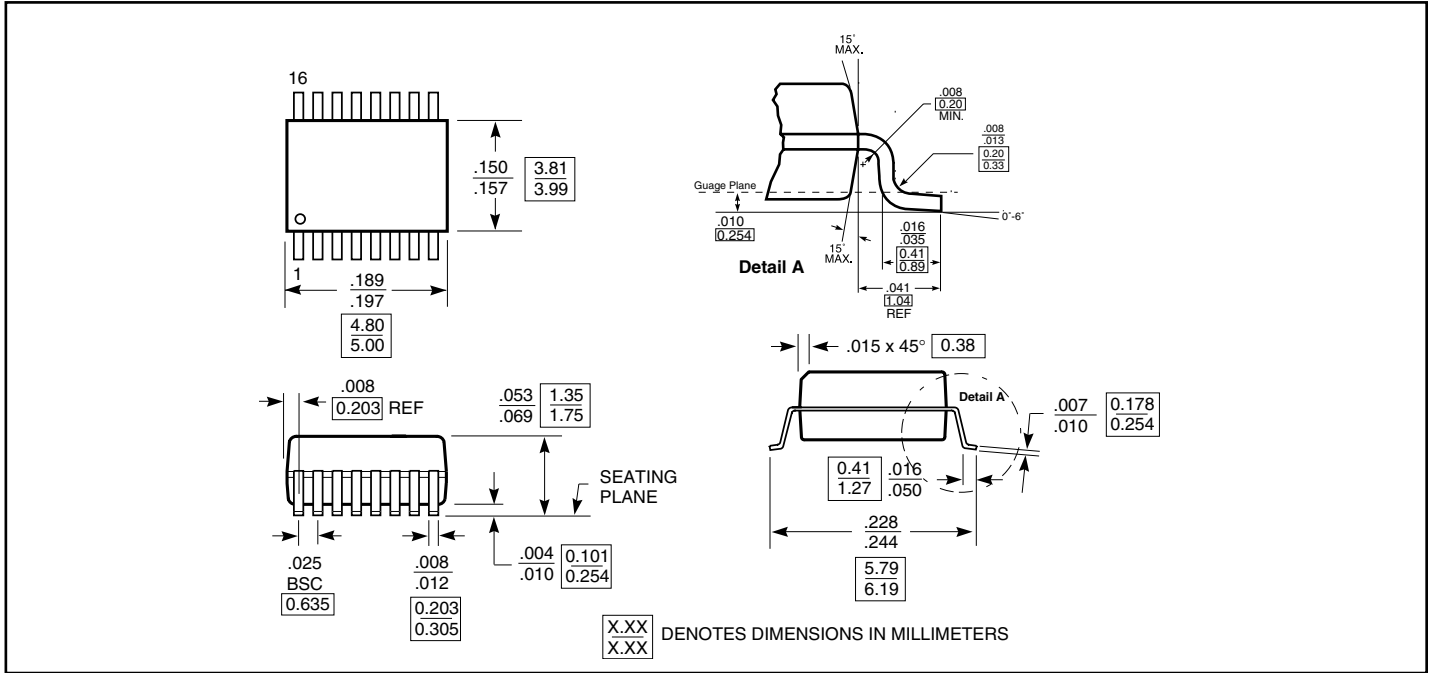

Packaging Mechanical: 14-Pin, SOIC (W)

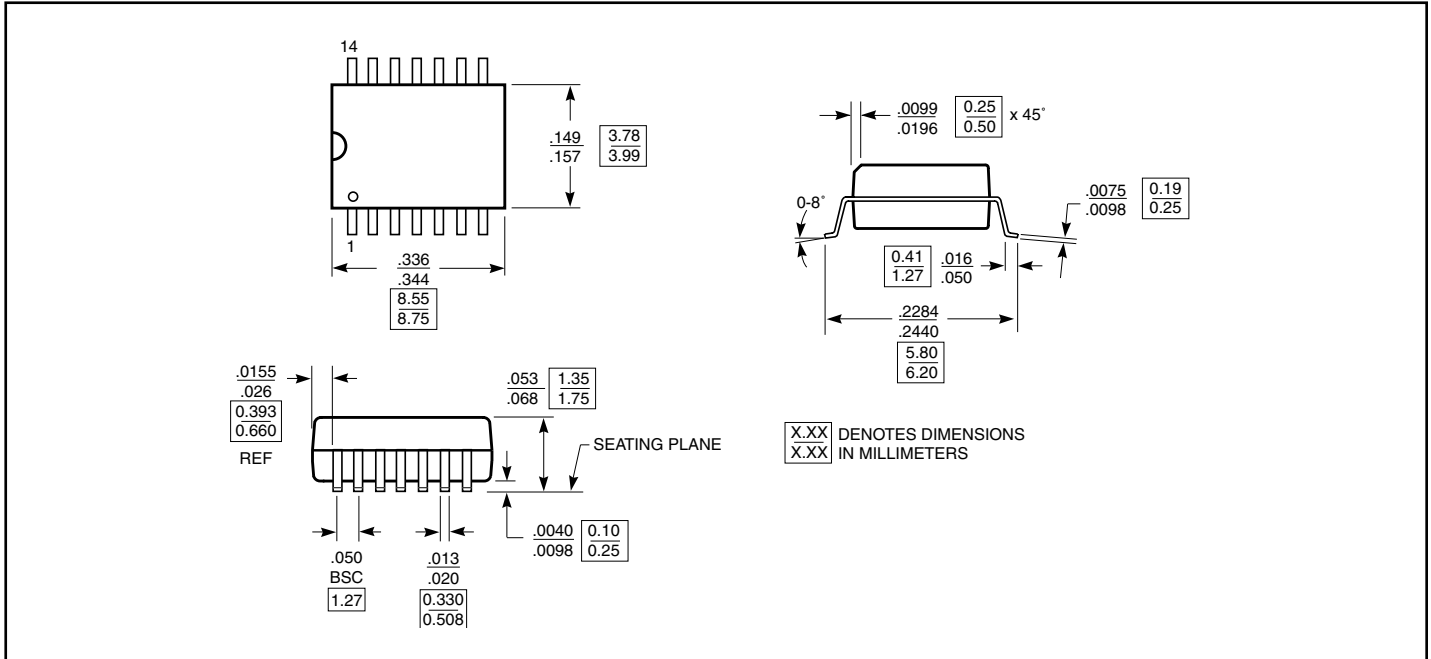

**Ordering Information**

<b>Ordering Code</b>	<b>Package Code</b>	<b>Package Description</b>
PI5A101Q	Q	16-pin, QSOP
PI5A101QE	Q	Pb-free & Green, 16-pin, QSOP
PI5A101W	W	14-pin SOIC
PI5A101WE	W	Pb-free & Green, 14-pin SOIC

**Notes:**

1. Thermal characteristics can be found on the company web site at [www.pericom.com/packaging/](http://www.pericom.com/packaging/)