



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Features


- High-speed: $t_{PD} = 2.5\text{ns}$ typical into 50pF @ $5\text{V } V_{CC}$
- Broad operating range: $V_{CC} = 1.65\text{V} - 5.5\text{V}$
- Power down high-impedance inputs/outputs
- High output drive: $\pm 24\text{mA}$ at $3\text{V } V_{CC}$
- Package: 5-pin space saving SOT23 and SC70

Description


The PI74STX1G32 is a 2-input OR gate that operates over the 1.65V to $5.5\text{V } V_{CC}$ operating range.

Pericom's PI74STX series of products are produced using the Company's advanced submicron technology.

Pinout

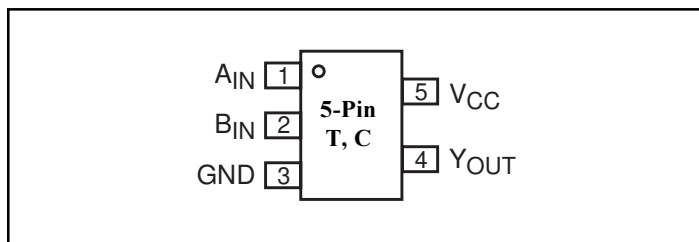

Block Diagram

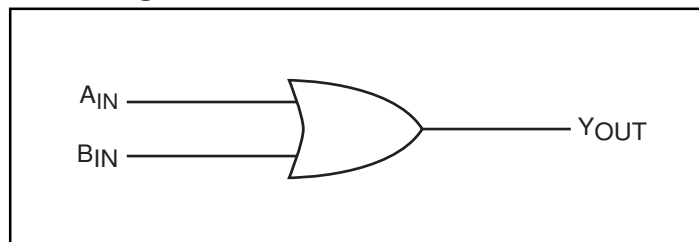

Pin Description

Pin Names	Description
A_{IN}	Input
B_{IN}	Input
Y_{OUT}	Output

Function Table

Inputs		Output
A_{IN}	B_{IN}	Y_{OUT}
L	L	L
L	H	H
H	L	H
H	H	H

Note:

H = HIGH Logic Level
L = LOW Logic Level

Recommended Operating Conditions⁽¹⁾

Parameter	Condition	Min.	Max.	Units
Supply Voltage (V_{CC})		1.65	5.5	V
Input Voltage (V_{IN})		0	5.5	
Output Voltage (V_{OUT})		0	V_{CC}	
Operating Temperature		-40	85	°C
Input Rise and Fall Time (t_r, t_f)	$V_{CC} = 1.8\text{V}, 2.5\text{V} \pm 0.2\text{V}$	0	20	ns/V
	$V_{CC} = 3.3\text{V}, \pm 0.3\text{V}$	0	10	
	$V_{CC} = 5.0\text{V}, \pm 0.5\text{V}$	0	5	

Note:

1. Unused inputs must be held HIGH or LOW. They may not float.

Absolute Maximum Ratings

Supply Voltage (V_{CC})	 -0.5V to +6V	DC V_{CC}/GND Current (I_{CC}/I_{GND})	 $\pm 50\text{mA}$
DC Input Voltage (V_{IN})	 -0.5V to +6V	Storage Temperature (T_{STG})	 -65°C to $+150^{\circ}\text{C}$
DC Output Voltage (V_{OUT})	 -0.5V to +6V	Junction Lead Temperature (IOS)	 200°C
DC Input Diode Current (I_{IK})	 -50mA to 20mA	Power Dissipation SOT23	 200mW
DC Output Diode Current (I_{OK})	 -50mA to 20mA	SC70	 150mW
DC Output Current (I_{OUT})	 $\pm 50\text{mA}$		

Note:

Absolute maximum ratings are DC values beyond which the device may be damaged or have its useful life impaired. The datasheet specifications should be met, without exception, to ensure that the system design is reliable over its power supply, temperature, and output/input loading variables. Pericom does not recommend operation outside datasheet specifications.

DC Electrical Characteristics (Over supply voltage and operating temperature ranges, unless otherwise specified)

Symbol	Parameter	V_{CC} (V)	Conditions	$T_A = +25^{\circ}\text{C}$			$T_A = -40$ to $+85^{\circ}\text{C}$		Units
				Min.	Typ.	Max.	Min.	Max.	
V_{IH}	HIGH Level Input Voltage	1.65-1.95 2.3-5.5		$0.75V_{CC}$ $0.70V_{CC}$			$0.75V_{CC}$ $0.70V_{CC}$		V
V_{IL}	LOW Level Input Voltage	1.65-1.95 2.3-5.5				$0.25V_{CC}$ $0.30V_{CC}$		$0.25V_{CC}$ $0.30V_{CC}$	
V_{OH}	HIGH Level Output Voltage	1.65	$V_{IN} = V_{IL}$ $I_{OH} = -100\mu\text{A}$	1.55	1.65		1.55		
		1.8		1.7	1.79		1.9		
		2.3		2.2	2.29		2.4		
		3.0		2.	2.99		2.3		
		4.5		4.4	4.5		4.4		
		1.65	$I_{OH} = -4\text{mA}$ $I_{OH} = -8\text{mA}$ $I_{OH} = -16\text{mA}$ $I_{OH} = -24\text{mA}$ $I_{OH} = -32\text{mA}$	1.29	1.52		1.29		
		2.3		1.9	2.13		1.9		
		3.0		2.4	2.71		2.4		
		3.0		2.3	2.55		2.3		
		4.5		3.8	4.20		3.8		
V_{OL}	LOW Level Output Voltage	1.65	$V_{IN} = V_{IH}$ $I_{OL} = 100\mu\text{A}$		0.01	0.1		0.1	μA
		1.8			0.01	0.1		0.1	
		2.3			0.01	0.1		0.1	
		3.0			0.00	0.1		0.1	
		4.5			0.00	0.1		0.1	
		1.65	$I_{OL} = 4\text{mA}$ $I_{OL} = 8\text{mA}$ $I_{OL} = 16\text{mA}$ $I_{OL} = 24\text{mA}$ $I_{OL} = 32\text{mA}$		0.08	0.24		0.24	
		2.3			0.10	0.3		0.3	
		3.0			0.18	0.4		0.4	
		3.0			0.28	0.55		0.55	
		4.5			0.28	0.55		0.55	
I_{IN}	Input Leakage Current	0-5.5	$V_{IN} = 5.5\text{V}$, GND	-1		1	-1	1	μA
I_{OFF}	Power Off Leakage Current	0.0	V_{IN} or $V_{OUT} = 5.5\text{V}$	-1		1	-1	1	
I_{CC}	Quiescent Supply Current	1.65-5.5	$V_{IN} = 5.5\text{V}$, GND			2.0		20	

AC Electrical Characteristics

Symbol	Parameter	V _{CC} (V)	Conditions	T _A = +25°C			T _A = -40 to +85°C		Units	Fig. No.
				Min.	Typ.	Max.	Min.	Max.		
t _{PLH} , t _{PHL}	Propagation Delay	1.8 ±0.15 2.5 ±0.2 3.3 ±0.3 5.0 ±0.5	C _L = 15pF, R _L = 1M ohm	0.7 0.5 0.5 0.5	5.8 3.4 2.6 2.0	7.0 4.3 3.5 2.6	0.7 0.5 0.5 0.5	7.7 4.7 3.9 2.9	ns	1 3
t _{PLH} , t _{PHL}	Propagation Delay	3.3 ±0.3 5.0 ±0.5	C _L = 50pF, R _L = 500 ohms	0.5 0.5	3.4 2.5	4.7 3.5	1.5 0.8	5.1 3.9		1 3
C _{IN}	Input Capacitance	0	V _{IN} = 0		4				pF	
C _{PD}	Power Dissipation Capacitance ⁽³⁾	3.3 5.0			24 30					2

Notes:

3. C_{PD} is defined as the value of the internal equivalent capacitance which is derived from dynamic operating current consumption (I_{CCD}) at no output loading and operating at 50% duty cycle (see Figure 2). C_{PD} is related to I_{CCD} dynamic operating current by the expression: I_{CCD} = (C_{PD})(V_{CC})(f_{IN}) + (I_{CC} static).

AC Loading and Waveforms

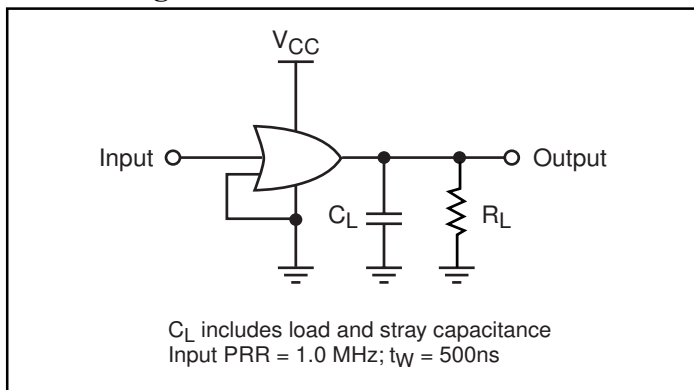


Figure 1. AC Test Circuit

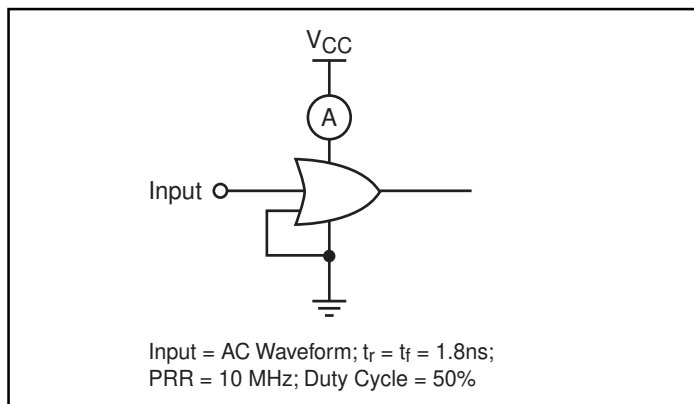


Figure 2. I_{CCD} Test Circuit



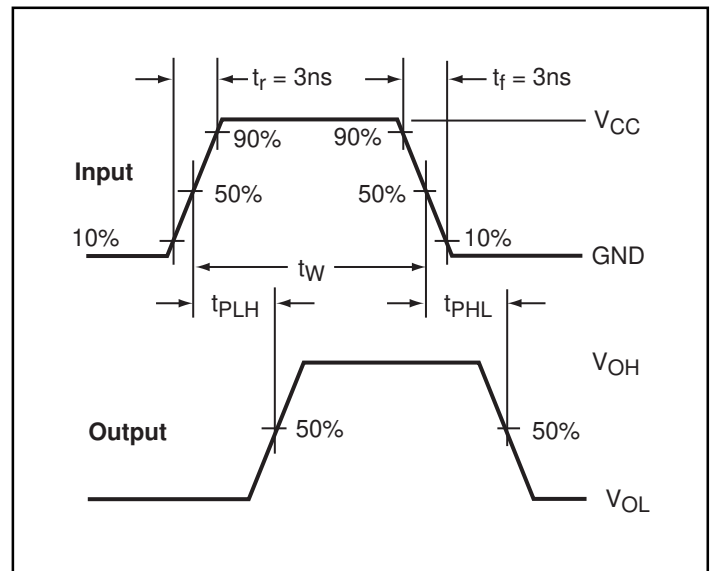


Figure 3. AC Waveforms

5-Pin SOT23 (T) Package

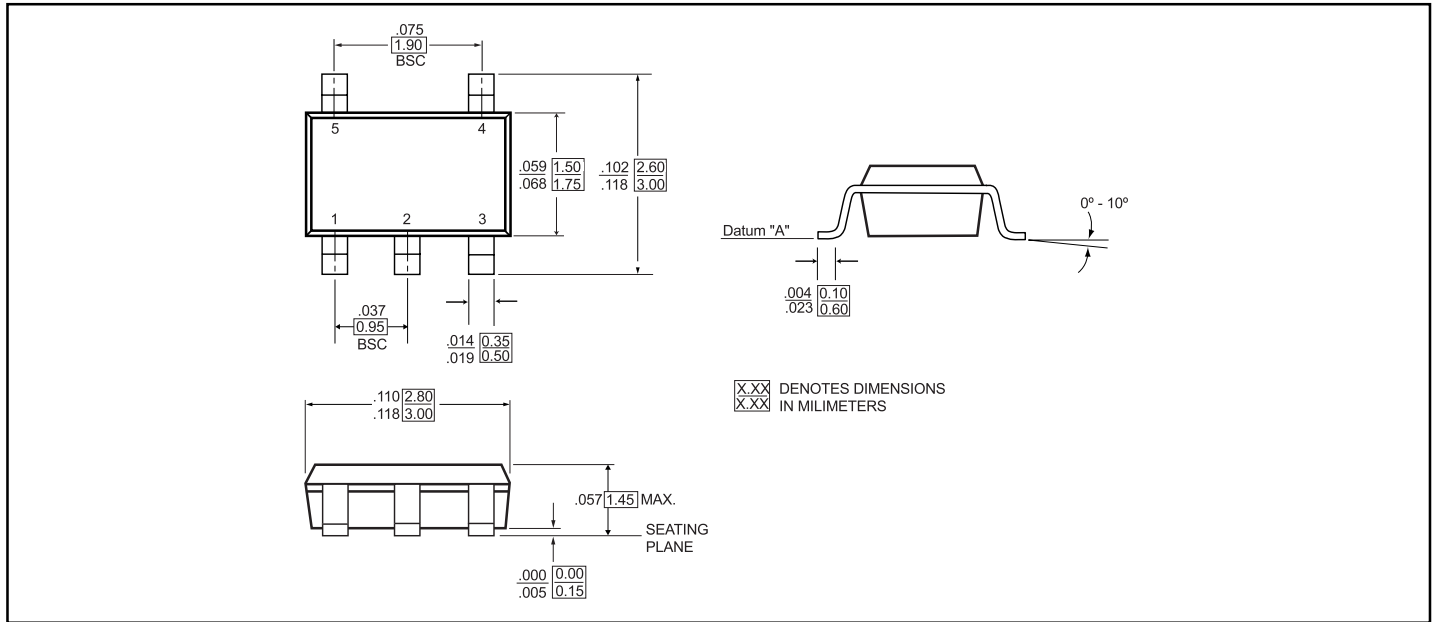

5-Pin SC70 Package (C)

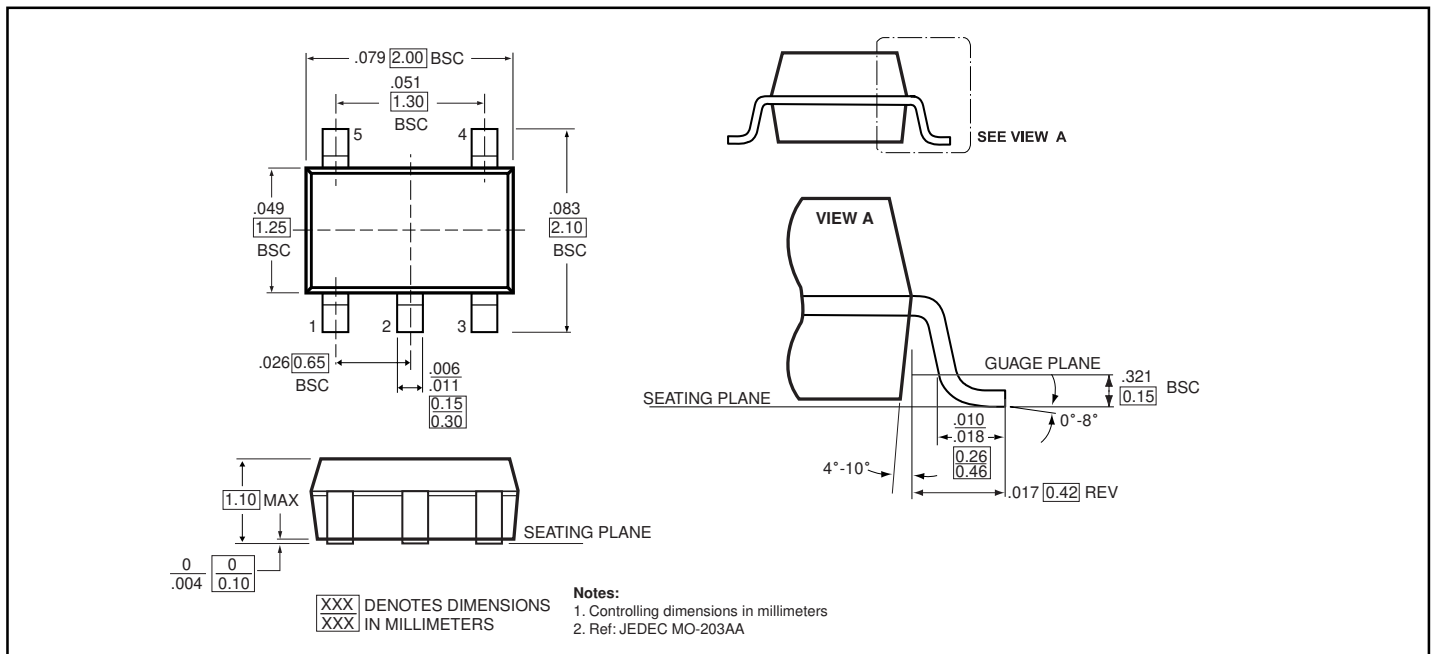

Ordering Information

Part	Pin-Package	Top Marking	Operating Range
PI74STX1G32TX	5-Pin - SOT23	X20	-40°C to 85°C
PI74STX1G32CX	5-Pin - SC70	X20	-40°C to 85°C