



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




Features

- High-speed: $t_{PD} = 2.6\text{ns}$ typical into 50pF @ 5V VDD
- Unbuffered Output
- Broad operating range: $V_{DD} = 1.65\text{V} - 5.5\text{V}$
- Power down high-impedance inputs/outputs
- Balanced output drive: $\pm 8\text{mA}$ at 3V VDD
- Packaging (Pb-free & Green available):
 - 5-pin SOT23(T)
 - 5-pin SC70(C)
 - 6-pin UDFN(ZR)


Description

The PI74STX1GU04 is an unbuffered inverter that operates over the 1.65V to 5.5V V_{DD} operating range.

Pinout

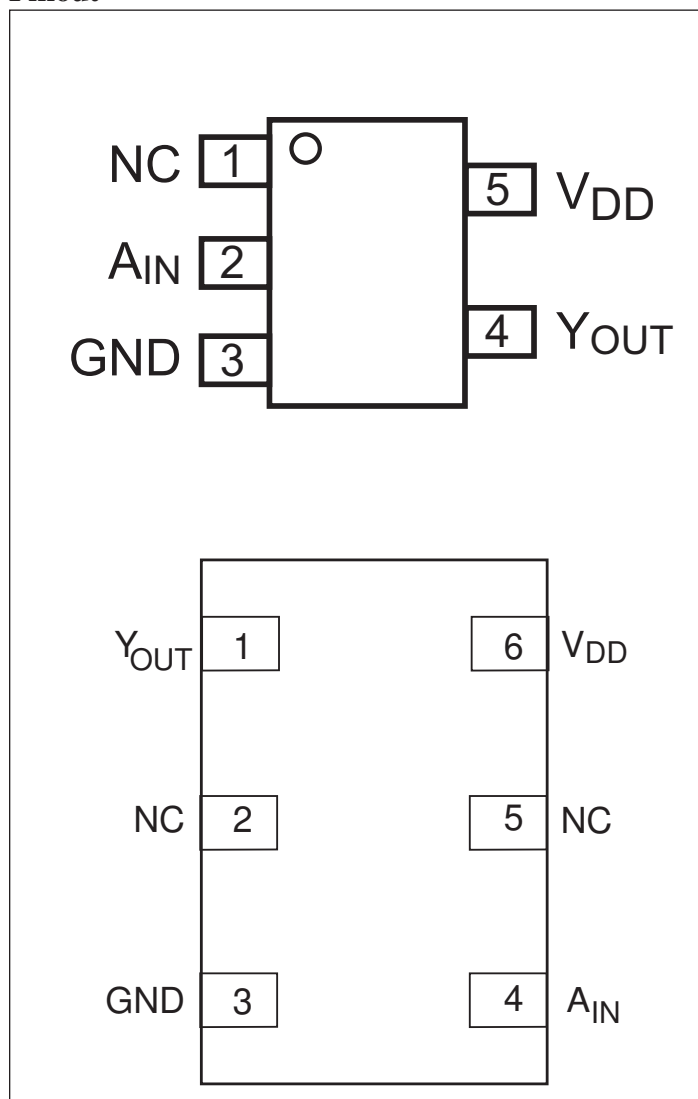

Pin Configuration

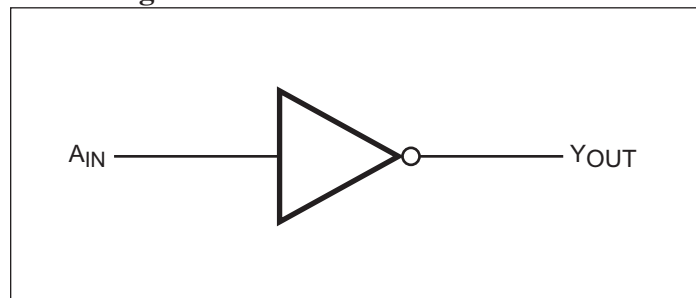

Recommended Operating Conditions

Parameter	Condition	Min.	Max.	Units
Supply Voltage (V_{DD})		1.65	5.5	V
Input Voltage (V_{IN})		0	5.5	
Output Voltage (V_{OUT})		0	V_{DD}	
Operating Temperature		-40	85	°C
Input Rise and Fall Time (t_r, t_f)	$V_{DD} = 1.8\text{V}, 2.5\text{V} \pm 0.2\text{V}$	0	20	ns/V
	$V_{DD} = 3.3\text{V}, \pm 0.3\text{V}$	0	10	
	$V_{DD} = 5.0\text{V}, \pm 0.5\text{V}$	0	5	

Notes:

1. Unused inputs must be held HIGH or LOW. They may not float.

Pin Description

Pin Names	Description
A _{IN}	Input
Y _{OUT}	Output

Function Table

Input	Output
A _{IN}	Y _{OUT}
L	H
H	L

Notes:

H = HIGH Logic Level

L = LOW Logic Level

Absolute Maximum Ratings

Supply Voltage (VDD)	-0.5V to +6V
DC Input Voltage (VIN).....	-0.5V to +6V
DC Output Voltage (VOUT).....	-0.5V to +6V
DC Input Diode Current (I _{IK})	-50mA to 20mA
DC Output Diode Current (I _{OK})	-50mA to 20mA
DC Output Current (I _{OUT})	±50mA
DC VCC/GND Current (I _{CC} /I _{GND})	±50mA
Storage Temperature (T _{STG}).....	-65°C to +150°C
Junction Lead Temperature (I _{OS}).....	200°C
Power Dissipation SOT23.....	200mW
SC70.....	150mW

Note:

Absolute maximum ratings are DC values beyond which the device may be damaged or have its useful life impaired. The datasheet specifications should be met, without exception, to ensure that the system design is reliable over its power supply, temperature, and output/input loading variables. Pericom does not recommend operation outside datasheet specifications.

DC Electrical Characteristics

Symbol	Parameter	VDD (V)	Description		T _A = +25°C			T _A = -40 to +85°C		Units
					Min.	Typ	Max.	Min.	Max.	
V _{IH}	HIGH Level Input Voltage	1.8-2.7 3.0-5.5			0.85 V _{DD} 0.8 V _{DD}			0.85 V _{DD} 0.8 V _{DD}		V
V _{IL}	LOW Level Input Voltage	1.8-2.7 3.0-5.5					0.15 V _{DD} 0.2 V _{DD}		0.15 V _{DD} 0.2 V _{DD}	
V _{OH}	HIGH Level Output Voltage	1.65	V _{IN} = V _{IL}	I _{OH} = -100μA	1.55	1.65		1.55		
		1.8			1.6	1.8		1.6		
		2.3			2.1	2.3		2.1		
		3.0			2.7	3.0		2.7		
		4.5			4.0	4.4		4.0		
		1.65		I _{OH} = -4mA	1.29	1.42		1.29		
		2.3		I _{OH} = -4mA	1.9	2.14		1.9		
		3.0		I _{OH} = -8mA	2.4	2.75		2.4		
		3.0		I _{OH} = -12mA	2.3	2.61		2.3		
		4.5		I _{OH} = -16mA	3.8	4.07		3.8		
V _{OL}	LOW Level Output Voltage	1.65	V _{IN} = V _{IH}	I _{OH} = 100μA		0.00	0.1		0.1	
		1.8				0.00	0.1		0.1	
		2.3				0.00	0.1		0.1	
		3.0				0.00	0.1		0.1	
		4.5				0.00	0.1		0.1	
		1.65		I _{OH} = 4mA		0.08	0.24		0.24	
		2.3		I _{OH} = 4mA		0.10	0.3		0.3	
		3.0		I _{OH} = 8mA		0.48	0.4		0.4	
		3.0		I _{OH} = 12mA		0.28	0.55		0.55	
		4.5		I _{OH} = 16mA		0.31	0.55		0.55	
I _{IN}	Input Leakage Current	0 to 5.5	V _{IN} = 5.5V, GND				±1		±10	μA
IOFF	Power Off Leakage Current	0.0	V _{IN} or V _{OUT} = 5.5V		-1		1	-1	1	
ICC	Quiescent Supply Current	1.65 - 5.5	V _{IN} = 5.5V, GND				2.0		20	

AC Electrical Characteristics

Sym- bol	Parameter	VCC (V)	Conditions	TA = +25°C			TA = -25°C to +85°C		Units	Fig. No.
				Min.	Typ.	Max.	Min.	Max.		
t _{PLH} t _{PHL}	Propagation Delay	1.8 ± 0.15 2.5 ± 0.2 3.3 ± 0.3 5.0 ± 0.5	C _L = 15pF, R _L = 1M-ohm	0.7 0.5 0.5 0.5	5.0 3.0 2.3 1.8	6.3 3.7 3.0 2.4	0.7 0.5 0.5 0.5	6.9 4.1 3.3 2.6	ns	1 3
t _{PLH} t _{PHL}	Propagation Delay	3.3 ± 0.3 5.0 ± 0.5	C _L = 50pF, R _L = 500-ohm	0.5 0.5	3.2 2.6	4.5 3.4	0.5 0.5	5.0 3.7		1 3
C _{IN}	Input Capacitance	0			4				pF	
C _{PD}	Power Dissipation Capacitance ¹	3.3 5.0			6.3 9.5					2

Notes:

1. CPD is defined as the value of the internal equivalent capacitance which is derived from dynamic operating current consumption (ICCD) at no output loading and operating at 50% duty cycle (see Figure 2). CPD is related to ICCD dynamic operating current by the expression: ICCD = (CPD)(VCC)(f_{IN}) + (ICC static).

AC Loading and Waveforms

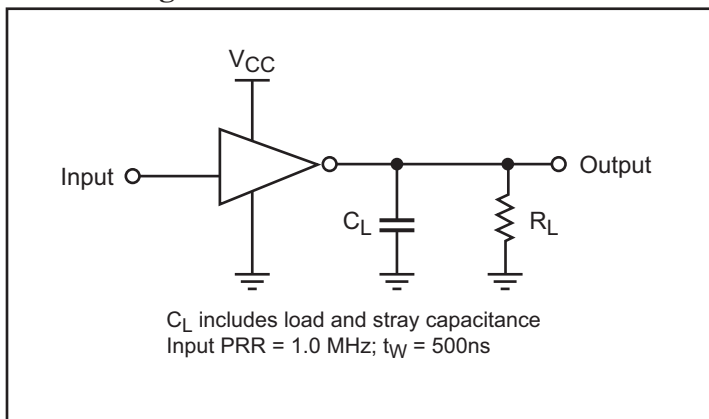


Figure 1. AC Loading and Waveforms

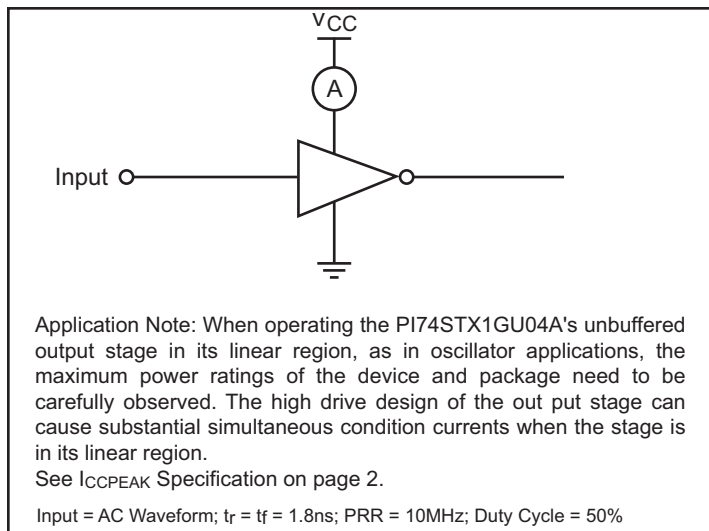


Figure 2. ICCD Test Circuit



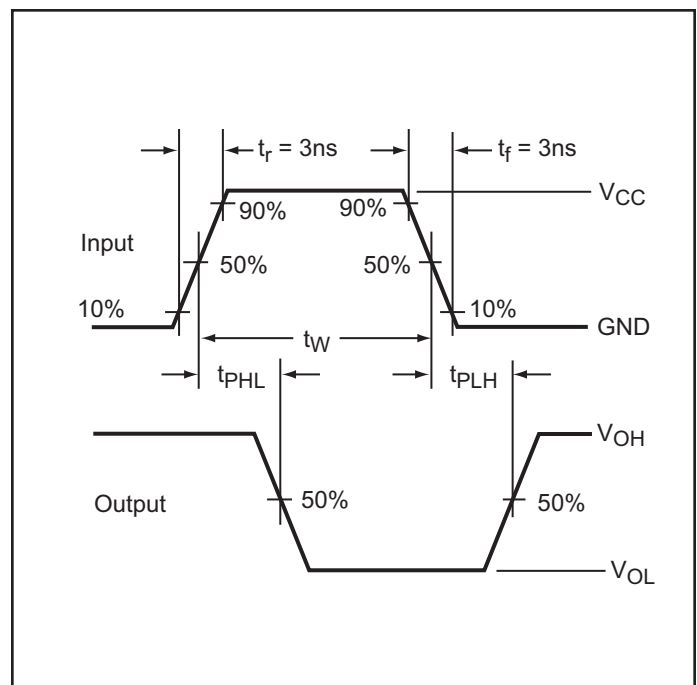


Figure 3. AC Waveform

Packaging Mechanical: 5-Pin SOT23 (T)


09-0130

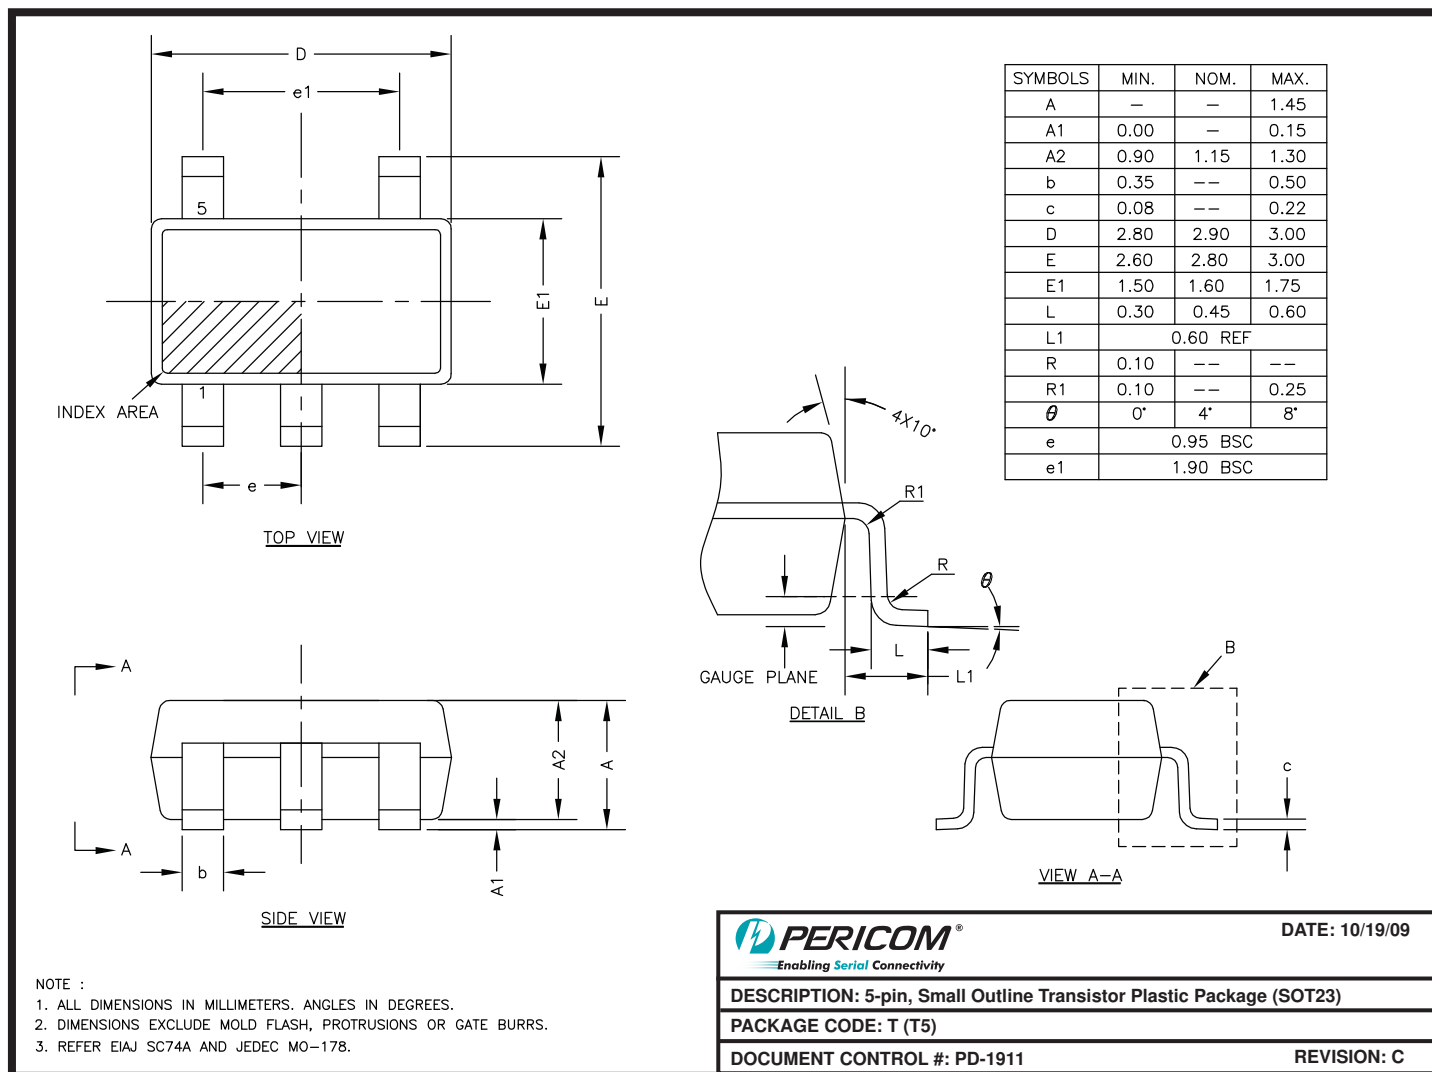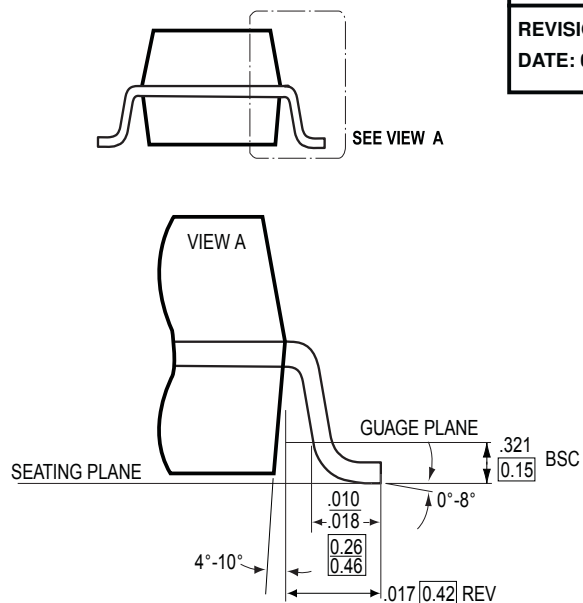


DATE: 03/09/05

3. Package Outline Exclusive of Mold Flash and Metal Burr

Pericom Semiconductor Corporation
3545 N. 1st Street, San Jose, CA 95134
1-800-435-2335 • www.pericom.com

PACKAGE CODE: C

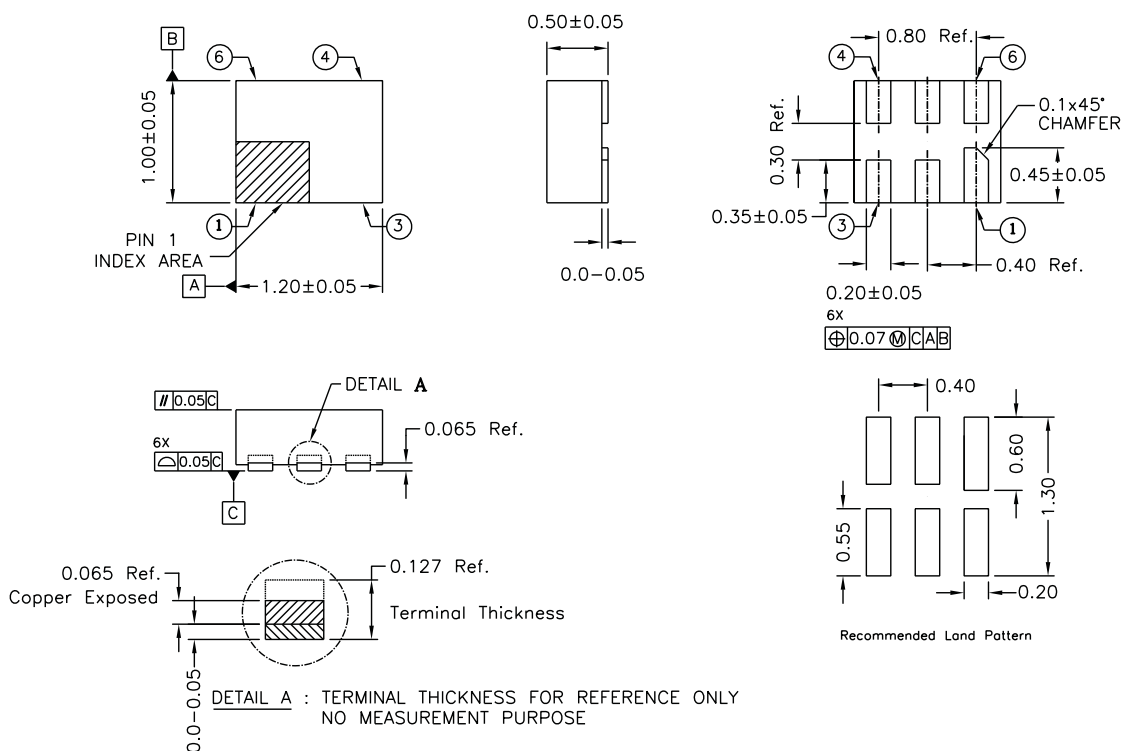

NOTE :

1. ALL DIMENSION ARE IN mm. ANGLES IN DEGREES.
2. COPLANARITY APPLIES TO THE EXPOSED PAD AS WELL AS THE TERMINALS
COPLANARITY SHALL NOT EXCEED 0.05 mm.
3. REFER JEDEC MO-236/MO-252



DATE: 01/28/08

DESCRIPTION: 6-contact, UltraThin Fine Pitch Dual Flat No Lead (UDFN)

PACKAGE CODE: ZR6

DOCUMENT CONTROL #: PD-2074

REVISION: --

08-0035

Note:

- For latest package info, please check: <http://www.pericom.com/products/packaging/mechanicals.php>

Ordering Information⁽¹⁻³⁾

Ordering Code	Package Code	Package Description	Top Marking
PI74STX1GU04TEX	T	5-pin SOT23, Pb-free & Green	BH
PI74STX1GU04CEX	C	5-pin SC70, Pb-free & Green	BH
PI74STX1GU04ZREX	ZR	6-pin UDFN, Pb-Free and Green	BH

Notes:

1. Thermal characteristics can be found on the company web site at www.pericom.com/packaging/
2. E = Pb-free and Green
3. Adding an X suffix = Tape/Reel