

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







REVISIONS AD 00 DESCRIPTION 16JAN12 | KH | PO A2 REVISED PER ECO-13-000800

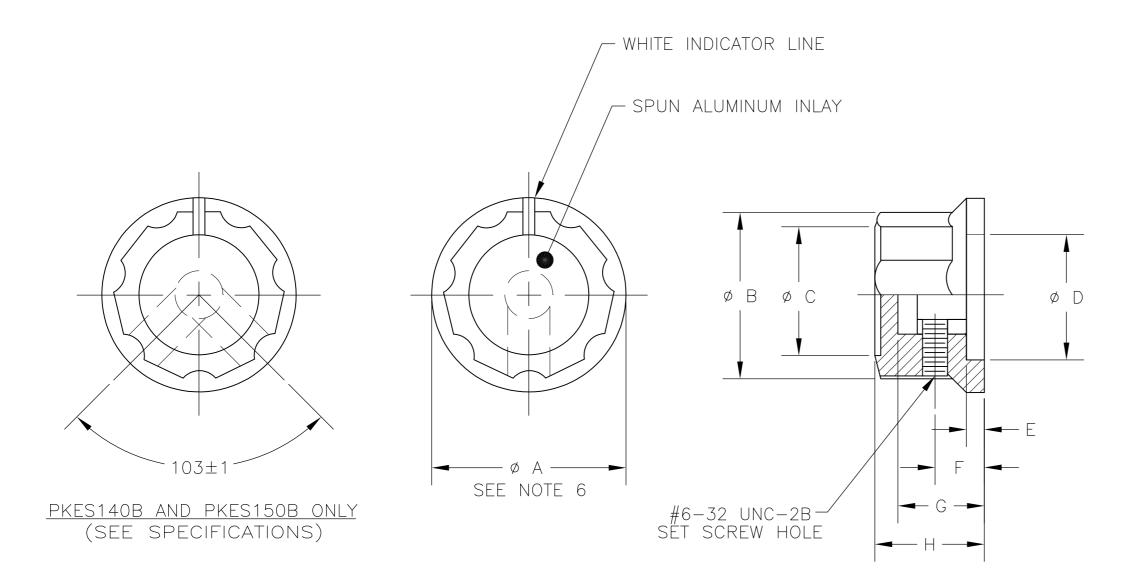

SPECIFICATIONS:

MATERIAL: PHENOLIC, COLOR: BLACK. SHAFT HOLE INSERT: COPPER ALLOY.

SET SCREW: #6-32 UNC-2A

PKËS60B, PKES70B, PKES90B, AND PKES120B

ONE SET SCREW ONLY.

PKES140B AND PKES150B, TWO SET SCREWS ONLY.

NOTES:

- 1 INTERPRET DRAWING PER ASME Y14.5M-1994.
- 2 DECORATIVE SPUN ALUMINUM INLAY.
- 3 PLASTIC OVERLAY MUST BE PRESENT ON TOP SURFACE.

PACKAGING: FOR P/N PKES140B-1/4 & PKES120B-1/4, A CARDBOARD SHEET SHALL BE INSERTED BETWEEN THE OUTER SLEEVE & KNOB TRAY SO AS TO PREVENT THE KNOBS FROM FALLING OUT OF THEIR RESPECTIVE POCKETS.

- VOID CORING FROM BOTTOM SIDE OF KNOB OPTIONAL.
- DIMENSIONS DO NOT APPLY IN MOLD GATE AREA.

TOLERANCE CHART									
	DIMENSION	TOLERANCE							
SHAFT	.126 DIA.	+.003 000							
HOLE	.251 DIA.	+.003 000							

			101011	
	SHAFT	.126	DIA.	+.003 000
HOL	HOLE	.251	DIA.	+.003 000

WAS DWG 80444

THIS DRAWING IS A CONTROLLED DOCUMENT.			14JUL04 -	TE Connectivity						ТУ
DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIE	E APVD	_	NAME						
INCHES		M ZITTO			KNOI	R FILITI	FD WITH SI	KIRT (F	PKES60)
\oplus	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .015	PRODUCT SPEC — APPLICATION SI	PEC	KNOB, FLUTED WITH SKIRT (PKES60, PKES70, PKES90, PKES120, PKES140 & PKES1 -					PKES150)	
	4 PLC ± - ANGLES ± 2*	_		SIZE	CAGE CODE	DRAWING NO)			RESTRICTED TO
MATERIAL SEE SPECIFICATIONS	FINISH	WEIGHT	_	A2	00779	C -4-	-1437624	1-6		_
SEL SELCIFICATIONS	_	CUSTOMER	R DRAWING				SCALE 1:1	SHEET	1 OF	1 REV A2

P/N	MODEL	.251 _	"A"	"B"	"C"	"D"	"E"	"F"	"G"	"H"
5-1437624-1	PKES60B1/8		.748	.618	.400	.460	.090	.220	.370	.470
5-1437624-0	PKES60B1/4		.748	.618	.400	.460	.090	.220	.370	.470
5-1437624-2	PKES70B1/4		.855	.744	.508	.705	.080	.275	.421	.526
5-1437624-3	PKES90B1/4		1.012	.889	.623	.846	.079	.256	.500	.570
4-1437624-6	PKES120B1/4		1.296	1.160	.858	1.018	.118	.320	.500	.628
4-1437624-7	PKES140B1/4		1.500	1.374	1.094	1.217	.118	.280	.540	.693
4-1437624-8	PKES150B1/4		1.768	1.551	1.217	1.413	.118	.300	.733	.831

1471-9 (3/11)