



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

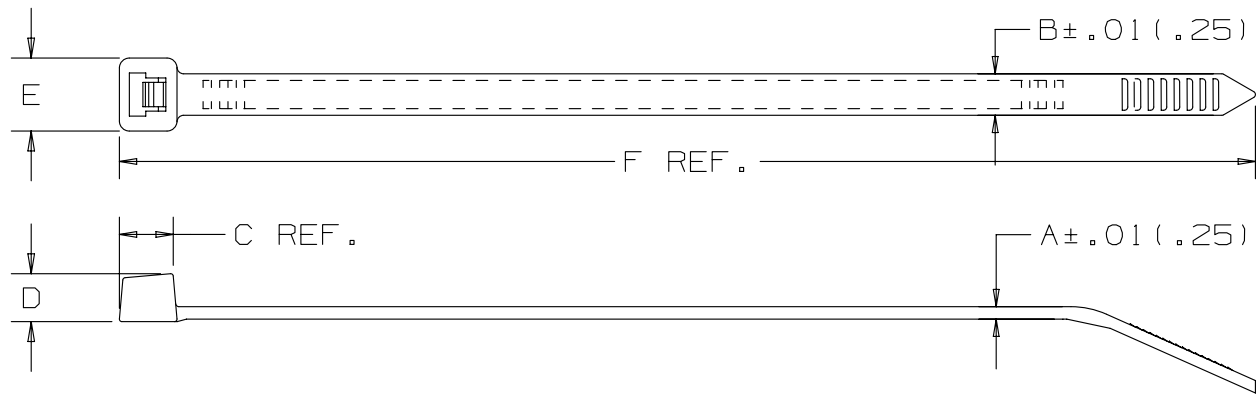

PANDUIT PART NO. *	BUNDLE DIA.		A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	MIN. LOOP TENSILE lbs. (N)	CROSS SECTION	WEIGHT lbs./100 pcs. (g)
	MIN. in (mm)	MAX. in (mm)									
PLT1M-702Y	.24 (6.1)	.87 (22)	.043 (1.1)	.098 (2.5)	.159 (4.0)	.186 (4.7)	.188 (4.8)	4.0 (102)	18 (80)	MINIATURE	.10 (45)
PLT2S-702Y	.24 (6.1)	1.88 (48)	.055 (1.4)	.190 (4.8)	.260 (6.6)	.240 (6.1)	.320 (8.1)	7.40 (188)	50 (222)	STANDARD	.49 (222)
PLT3S-702Y	.39 (10)	3.00 (76)	.055 (1.4)	.190 (4.8)	.260 (6.6)	.240 (6.1)	.320 (8.1)	11.60 (295)	50 (222)	STANDARD	.76 (344)

NOTES:

- \*1) SEE [www.panduit.com](http://www.panduit.com) FOR CURRENT PART NUMBER SUFFIX DESIGNATION AND FOR PACKAGE SIZE AND PART COLOR.
- 2) UL LISTED MAX TEMPERATURE RATING OF 257°F (125°C).
- 3) MATERIAL FLAMMABILITY RATING: UL94V-0.
- 4) EXCELLENT RESISTANCE TO MOST CHEMICALS.

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	TITLE	ITEM REVISION NAME	DATASET FILE NAME	MATERIAL	DRAWING NUMBER
11	4/25/13	BWG	MPH	RTFI	REVISED NOTES 1 AND 2, UPDATED DRAWING BORDER AND TITLE BLOCK.	SS-18060/11	PAN-TY CABLE TIE PLT PLENUM WIRING SERIES	W10001C0/11	W10001C0_DC/11-SS-18060_REV11	HALAR FLUOROPOLYMER COLOR: MAROON REGISTERED TRADEMARK OF Solvay Solexis, Inc.	SS-18060
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]				
							.X ± ---- .XXX ± .020 [.51]				
							.XX ± .02 [.5] ANGLES ± ----				
							THIRD ANGLE PROJECTION				
							DRAWN BY	DATE	CHK	SCALE	SIZE
							C.HARVELL	08/07/91	HVP	NONE	A

D10100DA/15