

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

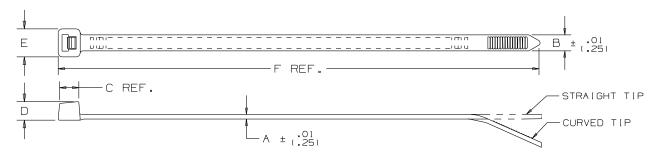

1 / / 1 *	BUNDLI MIN. (mm)		A in (mm)	B in (mm)	C in (mm)	in (mm)	in (mm)	1	MIN. LOOP TENSILE lbs.	CROSS * * SECTION	TIP STYLE	WEIGHT   bs./100 pcs. (g)
PLT1M-60	.06 (1.5)	.87 (22)	.043	.098 (2.5)	.170 (4.3)	.154	.188 (4.8)	3.9 (99)	18	М	CURVED	.07 (32)
PLT2S-60	.06 (1.5)	1.88	.052	.190 (4.8)	.260 (6.6)	.220 (5.6)	.320 (8.1)	7.4 (188)	50 (222)	S	CURVED	.29 (132)

## NOTES:

- \*1) SEE www.panduit.com FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PART COLOR. \*\*2) CABLE TIE CROSS-SECTION CODE: M=MINIATURE, I=INTERMEDIATE, S=STANDARD & H=HEAVY.

  3) MATERIAL HAS A UL RELATIVE THERMAL INDEX RATING OF 248°F (120°C).

  4) MATERIAL FLAMMABILITY RATING: UL94V-O.

  5) MINIMUM LOOP TENSILE RATING AT 120°F (49°C)/20% RH.

  6) COLOR: BLACK

WI0001EF/01-SS-26944\_05.PRT

									DIMENSIONS IN PARENTHESIS ARE IN METRIC UNIT	S	
									PANDUIT CORP. TINLEY PARK, ILLINO	IS	
									PAN-TY CABLE TIES BLACK FLAME RETARDANT -60 SERIES		
									UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: ALL DIMENSIONS ARE GIVEN		
				REVISED NOTE ! "SEE CURRENT PRICE SHEET" TO "SEE www.panduit.com"					(.X) ± (.XXX) ± .020(.51)	IN INCHES, THIRD ANGLE PROJECTION.	
5	11/15/11	JABO	TGS	CORRECTED BUNDLE DIA MAX, & 'C' DIM OF PLT2S	55-26944	5	TGS		DRAWN BY KET MAT'L: BLACK SCALE NONE		
4	8/9/11	JABO	TGS	CORRECTED 'F' DIMENSION OF PLTIM-60	SS-26944	4	TGS		DATE 2-3-95  FLAME RETARDANT  OFFAMING NO.  NYLON 6.6	DWG	
REV	DATE	BY	CHK	DESCRIPTION	ECN -	R	CUST	SUP	CHK'D HVP S5-26944	SIZE	