



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

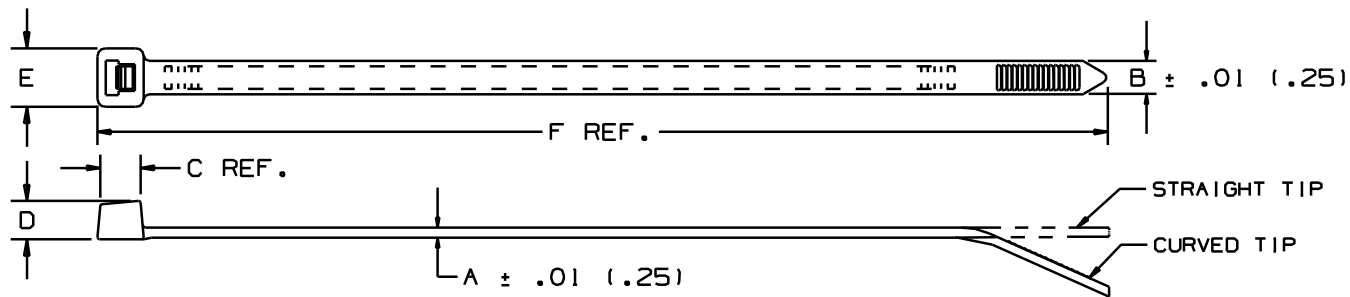

PANDUIT PART NO. *	BUNDLE DIA.		A	B	C	D	E	F	MIN. LOOP TENSILE lbs. (N)	CROSS ** SECTION	TIP STYLE	WEIGHT lbs./100 pcs. (g)
	MIN. (mm)	MAX. (mm)										
PLT1M-69	.06 (1.5)	.87 (22)	.043 (1.1)	.098 (2.5)	.170 (4.3)	.154 (3.9)	.188 (4.8)	3.88 (99)	18 (80)	M	CURVED	.07 (32.)
PLT2M-69	.06 (1.5)	2.00 (51)	.043 (1.1)	.098 (2.5)	.170 (4.3)	.154 (3.9)	.188 (4.8)	8.0 (203)	18 (80)	M	CURVED	.13 (59.0)
PLT1.5I-69	.06 (1.5)	1.38 (35)	.044 (1.1)	.142 (3.6)	.206 (5.2)	.177 (4.5)	.239 (6.1)	5.6 (142)	40 (178)	I	CURVED	.13 (58.0)
PLT2I-69	.06 (1.5)	2.00 (51)	.044 (1.1)	.142 (3.6)	.206 (5.2)	.177 (4.5)	.239 (6.1)	8.0 (203)	40 (178)	I	CURVED	.20 (91)
PLT2S-69	.06 (1.5)	1.88 (48)	.052 (1.3)	.190 (4.8)	.260 (6.6)	.220 (5.6)	.320 (8.1)	7.4 (188)	50 (222)	S	CURVED	.29 (132)
PLT4S-69	.06 (1.5)	4.00 (102)	.052 (1.3)	.190 (4.8)	.265 (6.7)	.220 (5.6)	.337 (8.6)	14.5 (368)	50 (222)	S	CURVED	.56 (254)
PLT4H-69	.188 (4.8)	4.00 (102)	.075 (1.9)	.300 (7.6)	.320 (8.1)	.290 (7.4)	.480 (12.2)	14.6 (371)	120 (534)	H	STRAIGHT	1.28 (581)

NOTES:

- 1) SEE www.panduit.com FOR CURRENT PART NUMBER SUFFIX DESIGNATION AND FOR PACKAGE SIZE AND PART COLOR.
- 2) CABLE TIE CROSS-SECTION CODE: M=MINIATURE, I=INTERMEDIATE, S=STANDARD & H=HEAVY.
- 3) MATERIAL HAS A UL RELATIVE THERMAL INDEX RATING OF 212°F (100°C).
- 4) MATERIAL FLAMMABILITY RATING: UL94V-0.
- 5) MINIMUM LOOP TENSILE RATING AT 120°F (49°C)/20% RH.
- 6) COLOR: NATURAL (IVORY TO LIGHT GREEN).

TITLE PAN-TY CABLE TIES - FLAME RETARDANT SERIES	
ITEM REVISION NAME 10B015JY/00	PANDUIT
DATASET FILE NAME 10B015JY/00 - SS-18977-REV14	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm)	
.x : .02 (.5)	.xxx : .020 (.51)
ANGLES :	
DRAWING NUMBER: SS-18977	
DRAWN BY FKS	DATE 5/6/88
CHK HVP	SCALE NONE
SHT 1 OF 1	
SIZE A	

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
14	6/7/13	BWG	PBC	RTFI	REVISED DIMENSION "F" FOR PLT1M-69. UPDATED TITLE BORDER.	SS-18977/14

D10100DA/15