

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









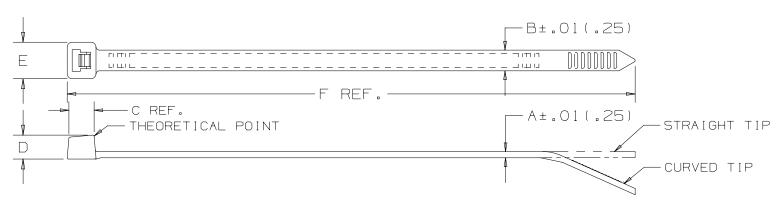

PANDUIT * PART NO.	BUNDLE DIA.  MIN. (mm) MAX. (mm)		A in (mm)	B in (mm)	C in (mm)	in (mm)	E in (mm)	F in (mm)	MIN. LOOP TENSILE Ibs.	CROSS SECTION	TIP STYLE	WEIGHT  bs./100 pcs.	
PLT3I	.06 (1.5)	3.00 (76)	.052 (1.3)	.145 (3.7)	.220 (5.6)	.180 (4.6)	.260 (6.6)	11.4	40 (178)	INTERMEDIATE	CURVED	.32 (145)	
PLT4I	.06 (1.5)	4.00 (102)	.052 (1.3)	.145 (3.7)	.220 (5.6)	.180 (4.6)	.260 (6.6)	14.5 (368)	40 (178)	INTERMEDIATE	CURVED	.40 (181)	
PLT1S	.06 (1.5)	1.00 (25)	.052 (1.3)	.190 (4.8)	.262 (6.7)	.220 (5.6)	.316 (8.0)	4.8 (122)	50 (222)	STANDARD	CURVED	.13 (58)	
PLT1.5S	.06 (1.5)	1.50 (38)	.052 (1.3)	.190 (4.8)	.262 (6.7)	.220 (5.6)	.316 (8.0)	6.2 (157)	50 (222)	STANDARD	CURVED	.26 (118)	
PLT2S	.06 (1.5)	1.88	.052 (1.3)	.190 (4.8)	.262 (6.7)	.220 (5.6)	.316 (8.0)	7.4 (188)	50 (222)	STANDARD	CURVED	.29 (132)	
PLT2.5S	.06 (1.5)	2.50 (63.5)	.052 (1.3)	.190 (4.8)	.265 (6.7)	.220 (5.6)	.337 (8.6)	9.8 (249)	50 (222)	STANDARD	CURVED	.38 (173)	
PLT3S	.06	3.00 (76)	.052 (1.3)	.190 (4.8)	.265 (6.7)	.220 (5.6)	.337 (8.6)	11.5 (292)	50 (222)	STANDARD	CURVED	.45 (204)	

NOTES:

\*SEE www.panduit.com FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE, PART MATERIAL, PART COLOR AND ANY THIRD PARTY RECOGNITION OR COMPLIANCE.

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS

В

								ם ואונם	11210112 11	N FARE	ALLEDED V	HE IN METHIC UNITS		
A							PAN-TY CABLE TIES					S - PLT SERIES		
								CUSTOMER DRAWING						
								W10001CB/32  DATASET FILE NAME W10001CB/32 SS-5540 SH2_REV32			PANDUIT			
								UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [ mm ]			MATERIAL:			
	32	10/01/15	BWG	MPH	JADE	REVISED NOTES.	SS-5540/32		 .02 [ .5]	.xxx ± .020 [ .51 ]		NYLON 6.6		
DA/16	31	8/13/13	BWG	KJM	RTFI	CORRECTED REV NO. REMOVED NOTE 1. SEE ECN FOR DETAILS.	SS-5540/30	] {	<u> </u>		RD ANGLE DJECTION	SS-5540 SHEET	2	
010100	REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	CEW	12-27-84	HVP	SCALE NONE	SHT 1 0F 1	SIZE	
9						2				•	1			