



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

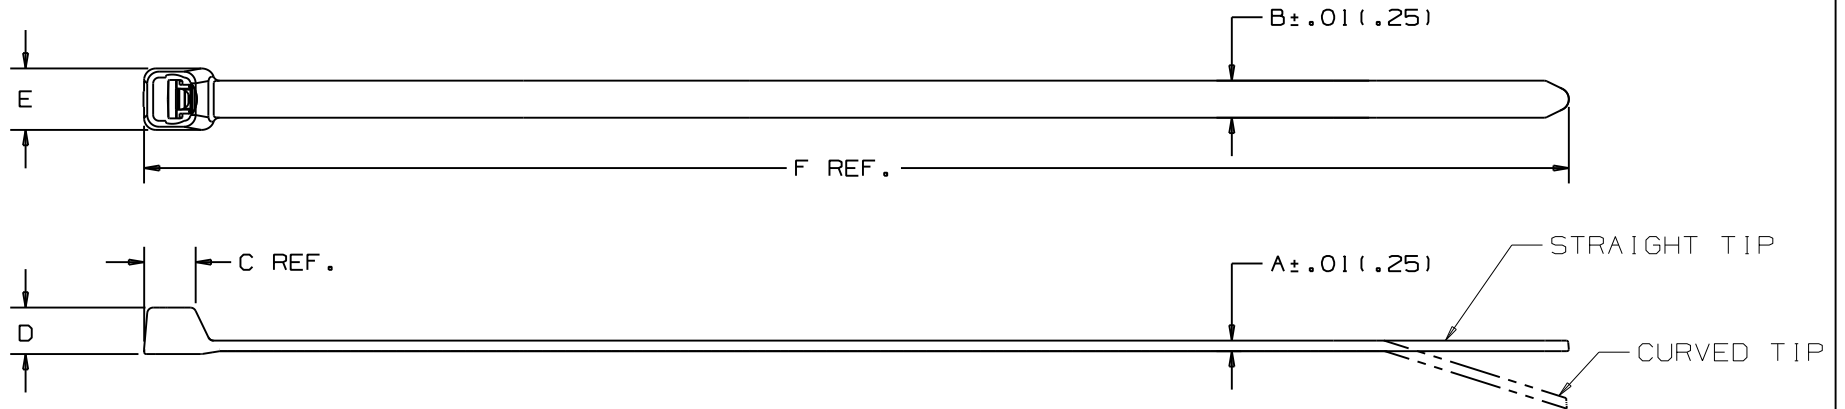

PANDUIT PART NO. *	BUNDLE DIA.		A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	MIN. LOOP TENSILE ** lbs. (N)	CROSS SECTION	TIP STYLE	WEIGHT lbs./100 pcs. (g)
	MIN. in (mm)	MAX. in (mm)										
PLT1M-71	.06 (1.5)	.87 (22)	.048 (1.2)	.101 (2.6)	.192 (4.9)	.130 (3.3)	.190 (4.8)	4.00 (101.6)	35 (156)	MINIATURE	CURVED	.08 (36)
PLT1.5M-71	.06 (1.5)	1.38 (35)	.048 (1.2)	.101 (2.6)	.192 (4.9)	.130 (3.3)	.190 (4.8)	5.90 (149.9)	35 (156)	MINIATURE	CURVED	.11 (52)
PLT2S-71	.13 (3.3)	1.88 (48)	.055 (1.4)	.190 (4.8)	.260 (6.6)	.240 (6.1)	.320 (8.1)	7.40 (188)	150 (668)	STANDARD	STRAIGHT	.38 (173)

NOTES:

- \*1) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE.
- 2) MATERIAL HAS A UL RELATIVE THERMAL INDEX RATING OF 500°F (260°C).
- 3) MATERIAL FLAMMABILITY RATING: UL94V-0.
- 4) EXCELLENT RESISTANCE TO MOST CHEMICALS.
- \*\*5) MINIMUM LOOP TENSILE RATING AT 73°F (23°C).

WI0035DS/03 SS\_27424.PRT

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP
6	10/11/10	BWG	MPH	UPDATED 1M AND 1.5M DIMENSIONS B, D, E AND F.	27424	6		BOBK

**PANDUIT** CORP. TINLEY PARK, ILLINOIS

PAN-TY CABLE TIES  
PLT ELEVATED TEMPERATURE SERIES

UNLESS OTHERWISE SPECIFIED,  
DIMENSIONAL TOLERANCES ARE:  
(.X) ± .1(2.5) | (.XXX) ± .020(.51)  
(.XX) ± .02(51) | ANGLES ± -----

UNLESS OTHERWISE SPECIFIED,  
ALL DIMENSIONS ARE GIVEN  
IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY: JABO  
DATE: 06/01/04  
CHK'D: DM

MAT'L: PEEK  
COLOR: BROWN  
REG. T.M. OF VICTREX MFG. LTD.

SCALE: NONE

DRAWING NO.: SS-27424  
DWG SIZE: A