



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

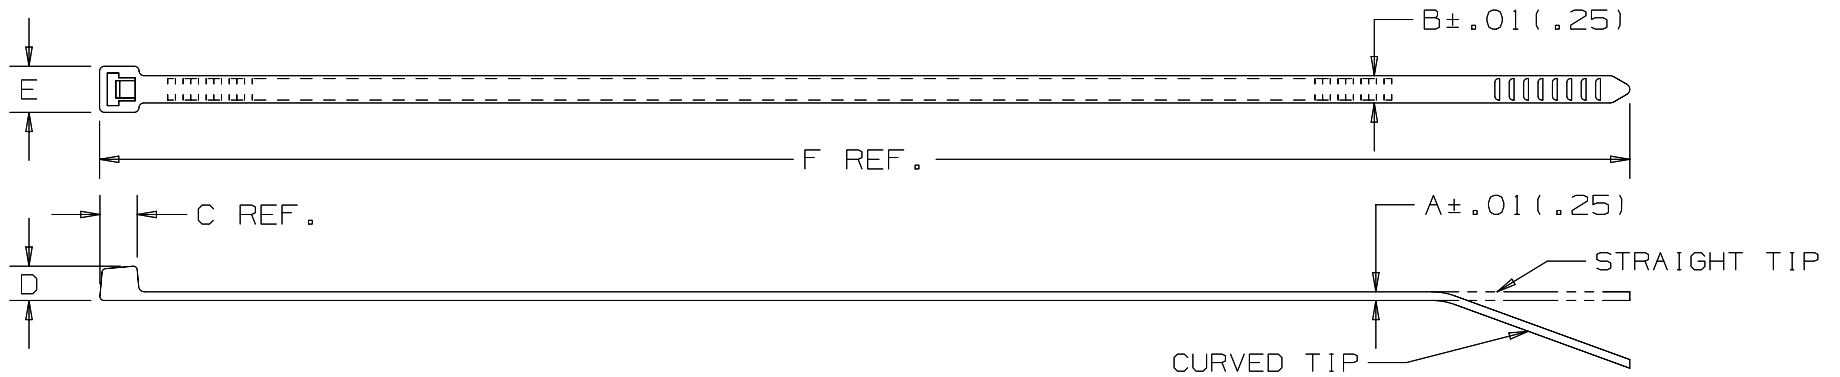

PANDUIT PART NO. *	BUNDLE DIA.		A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	MIN. LOOP TENSILE lbs. ** (N)	CROSS SECTION	TIP STYLE	WEIGHT lbs./100 pcs. (g)
	MIN. in (mm)	MAX. in (mm)										
PLT1M-76	.13 (3.3)	.87 (22)	.043 (1.1)	.098 (2.5)	.159 (4.0)	.186 (4.7)	.188 (4.8)	4.0 (102)	18 (80)	MINIATURE	CURVED	.09 (42)
PLT2I-76	.13 (3.3)	2.00 (51)	.045 (1.1)	.135 (3.4)	.200 (5.1)	.180 (4.6)	.260 (6.6)	8.0 (203)	30 (133)	INTERMEDIATE	CURVED	.28 (127)
PLT2S-76	.13 (3.3)	1.88 (48)	.055 (1.4)	.190 (4.8)	.260 (6.6)	.240 (6.1)	.320 (8.1)	7.40 (188)	50 (222)	STANDARD	CURVED	.47 (213)
PLT3S-76	.13 (3.3)	3.00 (76)	.059 (1.5)	.190 (4.8)	.260 (6.6)	.240 (6.1)	.320 (8.1)	11.60 (295)	50 (222)	STANDARD	CURVED	.78 (352)
PLT4S-76	.13 (3.3)	4.00 (102)	.059 (1.5)	.190 (4.8)	.260 (6.6)	.240 (6.1)	.320 (8.1)	14.60 (371)	50 (222)	STANDARD	CURVED	.89 (404)
PLT3H-76	.25 (6.4)	3.00 (76)	.075 (1.9)	.300 (7.6)	.370 (9.4)	.360 (9.1)	.480 (12.2)	11.50 (292)	120 (534)	HEAVY	STRAIGHT	1.5 (687)
PLT4H-76	.25 (6.4)	4.00 (102)	.075 (1.9)	.300 (7.6)	.370 (9.4)	.360 (9.1)	.480 (12.2)	14.60 (371)	120 (534)	HEAVY	STRAIGHT	1.83 (830)

NOTES:

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS

- *1) *SEE www.panduit.com FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE, PART MATERIAL, PART COLOR AND ANY THIRD PARTY RECOGNITION OR COMPLIANCE.
- 2) MATERIAL HAS A UL RELATIVE THERMAL INDEX RATING OF 338°F (170°C).
- 3) MATERIAL FLAMMABILITY RATING: UL94V-0.
- 4) EXCELLENT RESISTANCE TO MOST CHEMICALS.
- **5) MINIMUM LOOP TENSILE RATING AT 73°F (23°C).
- 6) MEETS REQUIREMENTS OF IEEE 383 PANDUIT QUALIFICATION TEST REPORT NO. 42481.

CAGE CODE
06383

TITLE PAN-TY CABLE TIES - PLT ELEVATED TEMPERATURE SERIES		CUSTOMER DRAWING	
ITEM REVISION NAME W10001BK/27		PANDUIT	
DATASET FILE NAME W10001BK/27-SS-4994_REV27			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm) .x ± .xxxx .xxx ± .020 (.51) .xx ± .02 (.5) ANGLES ± .xxxx		MATERIAL: TEFZEL FLUOROPOLYMER COLOR: AQUA BLUE REG. T.M. OF DUPONT CO.	
THIRD ANGLE PROJECTION		DRAWING NUMBER: SS-4994	
DRAWN BY CEW	DATE 3-8-85	CHK HVP	SCALE NONE
SHT 1 OF 1		A	

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
27	10/10/15	BWG	DJSL	JADE	REVISED NOTE 1 AND PLT2I MIN. TENSILE WAS 25 (111). UPDATED TITLE BORDER.	SS-4994/27