



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



DATA SHEET

3C95 Material specification

Supersedes data of September 2008



2015 October 02





3C95 SPECIFICATIONS

A low to medium frequency power material with low power losses from 25 to 100 °C for use in power transformers at frequencies up to 0.5 MHz. Especially suited for broad temperature range applications like automotive, lighting and mobile / handheld.

SYMBOL	CONDITIONS	VALUE	UNIT
μ_i	25 °C; ≤ 10 kHz; 0.25 mT	$3000 \pm 20 \%$	
μ_a	100 °C; 25 kHz; 200 mT	≈ 5000	
B	25 °C; 10 kHz; 1200 A/m	≈ 530	mT
	100 °C; 10 kHz; 1200 A/m	≈ 410	
P_V	25 °C; 100 kHz; 200 mT	≈ 350	kW/m ³
	100 °C; 100 kHz; 200 mT	≈ 290	
ρ	DC, 25 °C	≈ 5	Ωm
T_C		≥ 215	°C

SYMBOL	CONDITIONS	VALUE	UNIT
α_F	≤ 10 kHz; 0.25 mT; -40 to 25 °C	$1 \pm 2 \times 10^{-6}$	K ⁻¹
	≤ 10 kHz; 0.25 mT; -10 to 55 °C	$1.5 \pm 2 \times 10^{-6}$	K ⁻¹
	≤ 10 kHz; 0.25 mT; 0 to 25 °C	$1.5 \pm 2 \times 10^{-6}$	K ⁻¹
	≤ 10 kHz; 0.25 mT; 25 to 55 °C	$1.5 \pm 2 \times 10^{-6}$	K ⁻¹
	≤ 10 kHz; 0.25 mT; 25 to 55 °C	$1.5 \pm 2 \times 10^{-6}$	K ⁻¹
D_F	25 °C; 10 kHz; 0.25 mT	$\leq 8 \times 10^{-6}$	
density		≈ 4800	kg/m ³

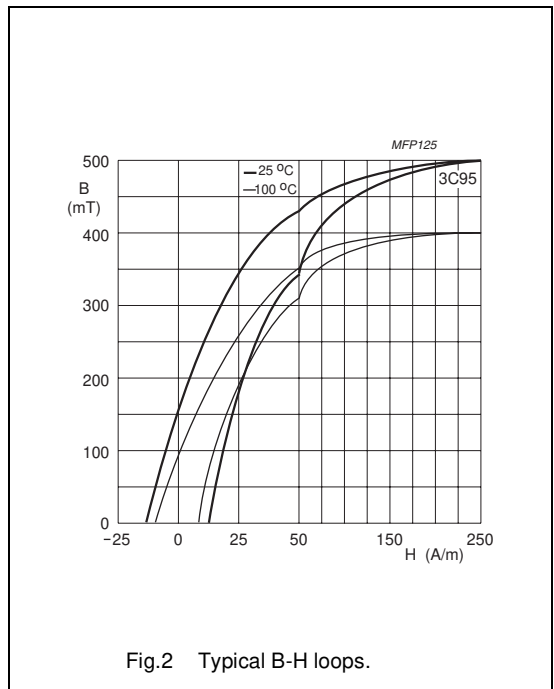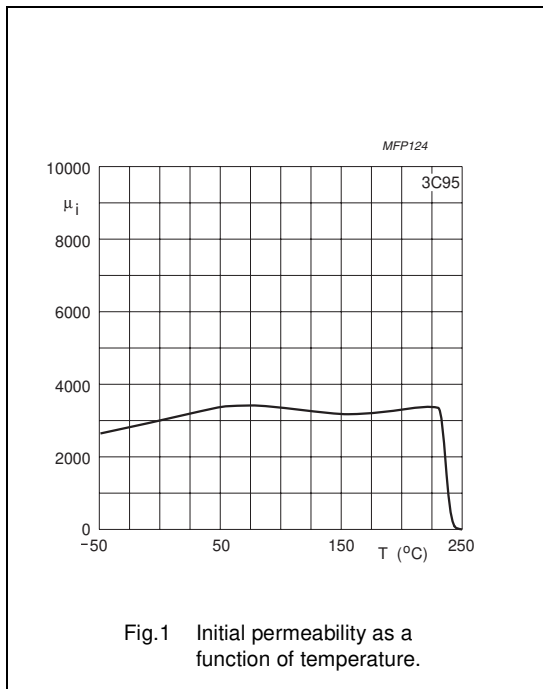

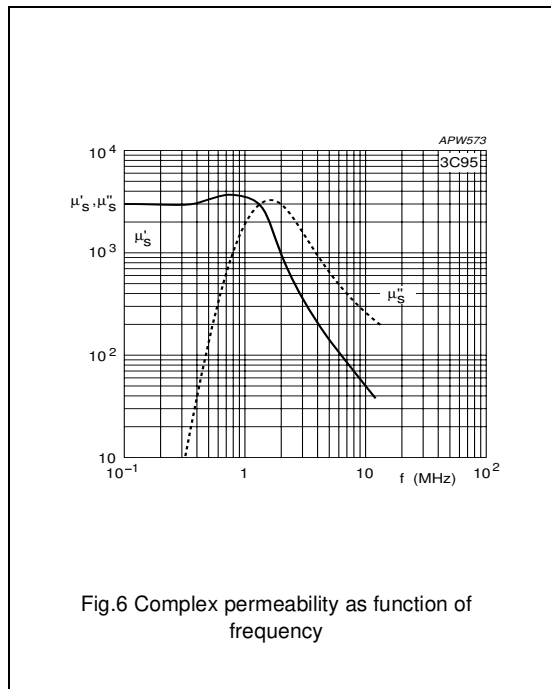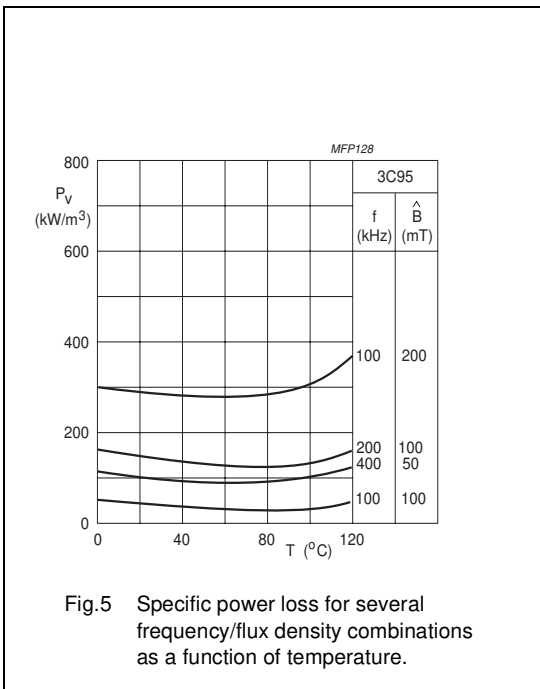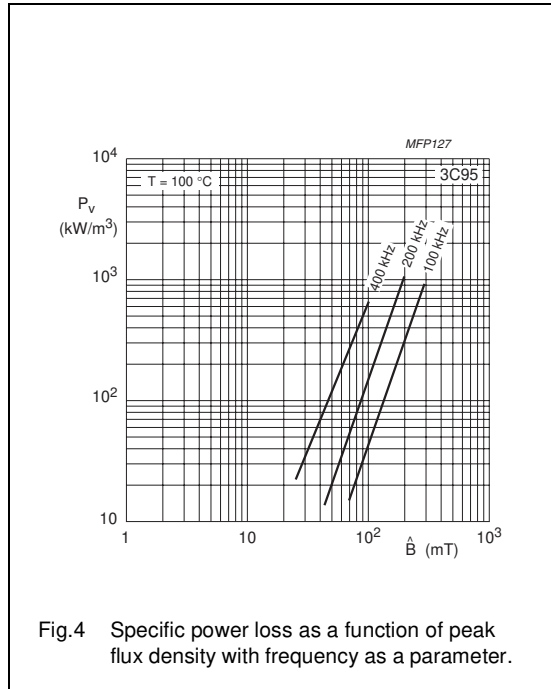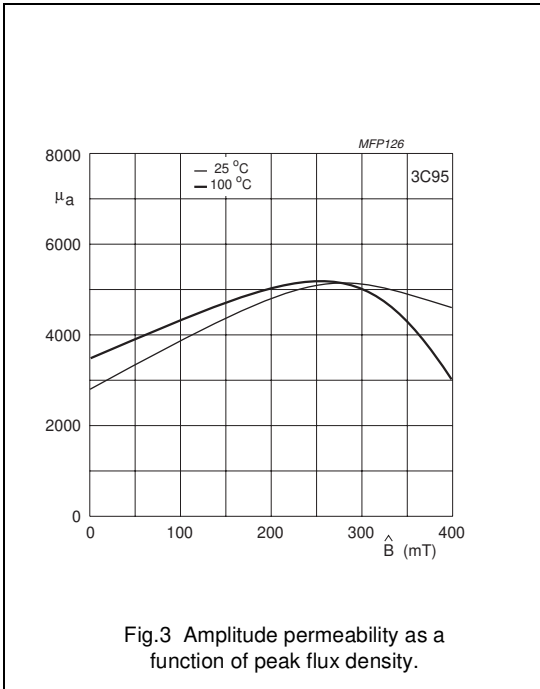




DATA SHEET STATUS DEFINITIONS

DATA SHEET STATUS	PRODUCT STATUS	DEFINITIONS
Preliminary specification	Development	This data sheet contains preliminary data. Ferroxcube reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.
Product specification	Production	This data sheet contains final specifications. Ferroxcube reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.

DISCLAIMER

Life support applications — These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Ferroxcube customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Ferroxcube for any damages resulting from such application.

PRODUCT STATUS DEFINITIONS

STATUS	INDICATION	DEFINITION
Prototype		These are products that have been made as development samples for the purposes of technical evaluation only. The data for these types is provisional and is subject to change.
Design-in		These products are recommended for new designs.
Preferred		These products are recommended for use in current designs and are available via our sales channels.
Support		These products are not recommended for new designs and may not be available through all of our sales channels. Customers are advised to check for availability.