



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

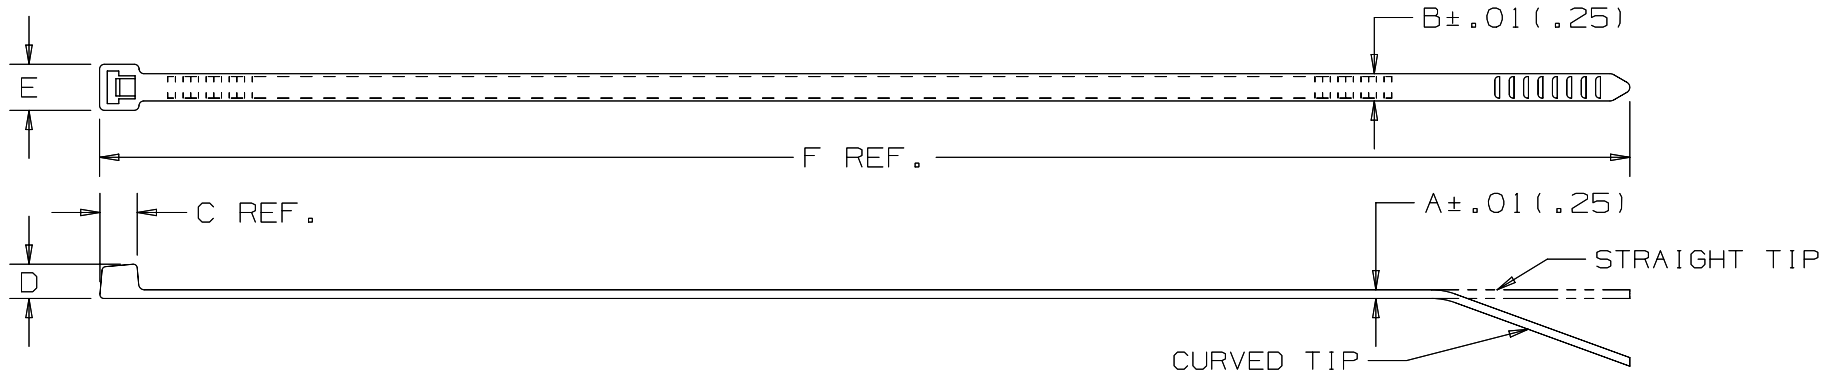

PANDUIT PART NO. *	BUNDLE DIA.		A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	MIN. LOOP TENSILE lbs. (N) **	CROSS SECTION	TIP STYLE	WEIGHT lbs./100 pcs. (g)
	MIN. in (mm)	MAX. in (mm)										
PLT1M-86	.13 (3.3)	.87 (22)	.044 (1.1)	.098 (2.5)	.159 (4.0)	.186 (4.7)	.188 (4.8)	3.9 (100)	18 (80)	MINIATURE	CURVED	.07 (34)
PLT2I-86	.13 (3.3)	2.00 (51)	.047 (1.2)	.135 (3.4)	.200 (5.1)	.180 (4.6)	.240 (6.1)	8.0 (203)	30 (134)	INTERMEDIATE	CURVED	.21 (96)
PLT2S-86	.13 (3.3)	1.85 (47)	.057 (1.4)	.190 (4.8)	.260 (6.6)	.240 (6.1)	.320 (8.1)	7.30 (186)	50 (222)	STANDARD	CURVED	.35 (157)
PLT3S-86	.13 (3.3)	3.00 (76)	.057 (1.4)	.190 (4.8)	.260 (6.6)	.240 (6.1)	.320 (8.1)	11.50 (291)	50 (222)	STANDARD	CURVED	.56 (252)
PLT4S-86	.13 (3.3)	4.00 (102)	.057 (1.4)	.190 (4.8)	.260 (6.6)	.240 (6.1)	.320 (8.1)	14.40 (366)	50 (222)	STANDARD	CURVED	.71 (324)
PLT3H-86	.25 (6.4)	3.00 (76)	.075 (1.9)	.300 (7.6)	.370 (9.4)	.360 (9.1)	.480 (12.2)	11.10 (282)	120 (534)	LIGHT-HEAVY	STRAIGHT	1.15 (522)
PLT4H-86	.25 (6.4)	4.00 (102)	.075 (1.9)	.300 (7.6)	.370 (9.4)	.360 (9.1)	.480 (12.2)	14.40 (366)	120 (534)	LIGHT-HEAVY	STRAIGHT	1.42 (643)

NOTES:

*1) SEE www.panduit.com FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE, PART MATERIAL, PART COLOR AND ANY THIRD PARTY RECOGNITION OR COMPLIANCE.

2) COMPOSED OF METAL DETECTABLE NYLON.

3) MATERIAL FLAMMABILITY: CONFORMS TO UL94V-HB.

**4) CONDITIONED FOR 24 HRS @ 120° F/20% RH.

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	TITLE	ITEM REVISION NAME	DATASET FILE NAME	MATERIAL:	DRAWING NUMBER:
							PAN-TY CABLE TIES - PLT METAL DETECTABLE SERIES			METAL DETECTABLE NYLON - COLOR: BLUE	
							CONTROL DRAWING				
								W10001BF/03		PANDUIT	
									W10001BF/03-SS-27556		
								UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]			
								.x ± ----	.xxx ± .020 (.51)		
								.xx ± .02 (.5)	ANGLES ± ----		
									THIRD ANGLE PROJECTION		
03	9/20/16	BWG	MPH	JADE	UPDATED TITLE BORDER AND NOTE 1. SEE ECN DOCUMENT FOR COMPLETE DETAILS.	010688/00					SS-27556
ERW	5/29/07	TGS	NONE	SHT 1 OF 1	A						

D10100DA/20