



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

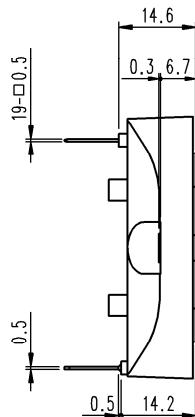
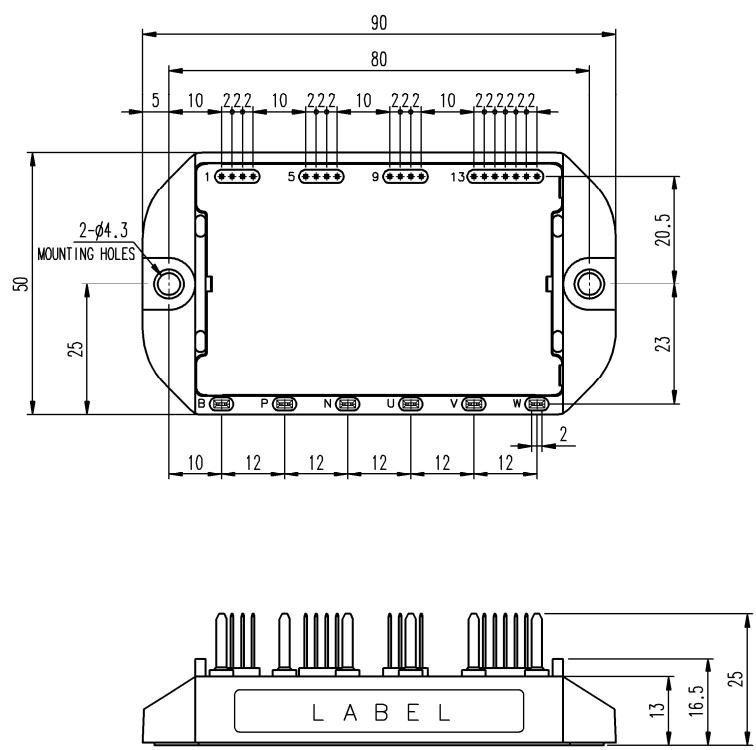
Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

**PM75B4L1C060****FEATURE**

- a) Adopting new 5th generation Full-Gate CSTBT™ chip
- b) Error output signal is possible from all each protection upper and lower IGBT
- c) The mounting surface is 90mm×50mm about 30% less than B4LA type
- Monolithic gate drive & protection logic
- Detection, protection & status indication circuits for, short-circuit, over-temperature & under-voltage.

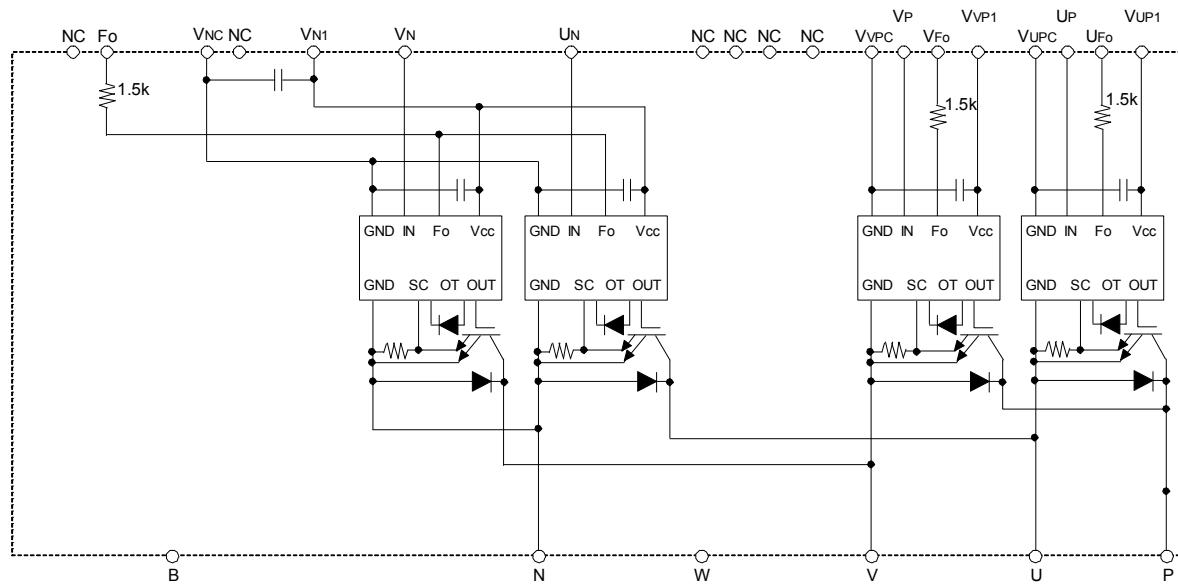
**APPLICATION**

Photo voltaic power conditioner

**PACKAGE OUTLINES****Dimensions in mm****Terminal code**

1. VUPC	8. VVP1	15. NC
2. UFo	9. NC	16. UN
3. UP	10. NC	17. VN
4. VUP1	11. NC	18. NC
5. VVPC	12. NC	19. Fo
6. VFo	13. VNC	
7. VP	14. VN1	

## INTERNAL FUNCTIONS BLOCK DIAGRAM

MAXIMUM RATINGS ( $T_j = 25^\circ\text{C}$ , unless otherwise noted)

## INVERTER PART

Symbol	Parameter	Conditions	Ratings	Unit
$V_{CES}$	Collector-Emitter Voltage	$V_D=15\text{V}, V_{CIN}=15\text{V}$	600	V
$I_C$	Collector Current	$T_c=25^\circ\text{C}$	75	A
$I_{CRM}$		Pulse	150	
$P_{tot}$	Total Power Dissipation	$T_c=25^\circ\text{C}$	201	W
$I_E$	Emitter Current	$T_c=25^\circ\text{C}$	75	A
$I_{ERM}$		Pulse	150	
$T_j$	Junction Temperature		-20 ~ +150	°C

\*: Tc measurement point is just under the chip.

## CONTROL PART

Symbol	Parameter	Conditions	Ratings	Unit
$V_D$	Supply Voltage	Applied between : $V_{UP1}-V_{UPC}, V_{VP1}-V_{VPC}, V_{N1}-V_{NC}$	20	V
$V_{CIN}$	Input Voltage	Applied between : $UP-V_{UPC}, VP-V_{VPC}, UN-VN-V_{NC}$	20	V
$V_{FO}$	Fault Output Supply Voltage	Applied between : $UFo-V_{UPC}, VFo-V_{VPC}, Fo-V_{NC}$	20	V
$I_{FO}$	Fault Output Current	Sink current at $UFo, VFo, Fo$ terminals	20	mA

**TOTAL SYSTEM**


Symbol	Parameter	Conditions	Ratings	Unit
$V_{CC(ROT)}$	Supply Voltage Protected by SC	$V_D = 13.5V \sim 16.5V$ Inverter Part, $T_j = +125^\circ C$ Start	450	V
$V_{CC(surge)}$	Supply Voltage (Surge)	Applied between : P-N, Surge value	500	V
$T_{stg}$	Storage Temperature		-40 ~ +125	°C
$V_{isol}$	Isolation Voltage	60Hz, Sinusoidal, Charged part to Base plate, AC 1min, RMS	2500	V

\*:  $T_C$  measurement point is just under the chip.**THERMAL RESISTANCE**

Symbol	Parameter	Conditions	Limits			Unit
			Min.	Typ.	Max.	
$R_{th(j-c)Q}$	Thermal Resistance	Junction to case, IGBT (per 1 element)	(Note.1)	-	-	0.62
$R_{th(j-c)D}$		Junction to case, FWDi (per 1 element)	(Note.1)	-	-	1.06
$R_{th(c-s)}$	Contact Thermal Resistance	Case to heat sink, (per 1 module) Thermal grease applied	(Note.1)	-	0.06	-

Note.1: If you use this value,  $R_{th(s-a)}$  should be measured just under the chips.

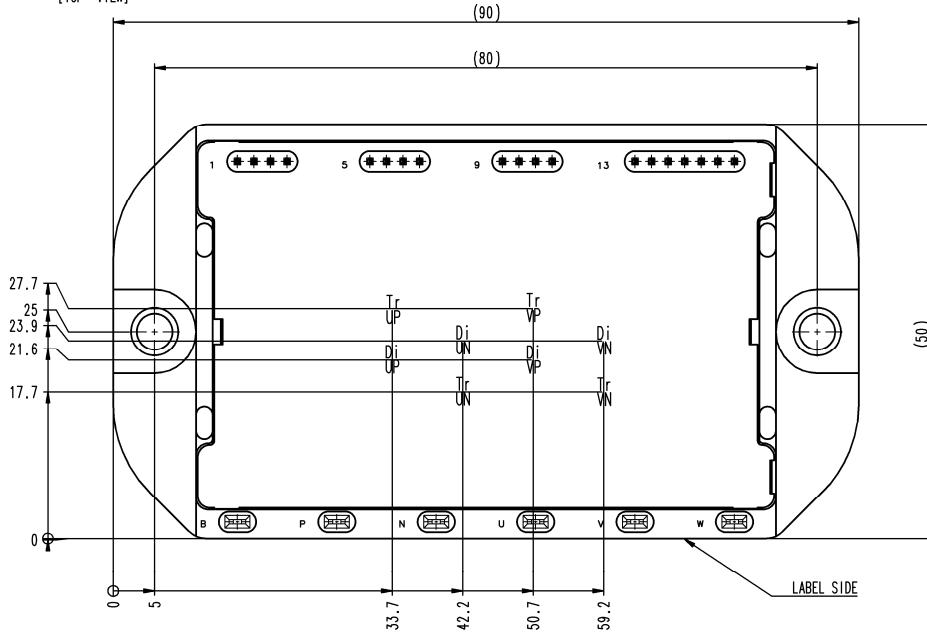[TOP VIEW]

**ELECTRICAL CHARACTERISTICS ( $T_j = 25^\circ C$ , unless otherwise noted)****INVERTER PART**

Symbol	Parameter	Conditions	Limits			Unit
			Min.	Typ.	Max.	
$V_{CESat}$	Collector-Emitter Saturation Voltage	$V_D=15V$ , $I_C=75A$	$T_j=25^\circ C$	-	2.2	2.7
		$V_{CIN}=0V$ , Pulsed	$T_j=125^\circ C$	-	2.2	2.7
$V_{EC}$	Emitter-Collector Voltage	$I_E=75A$ , $V_D=15V$ , $V_{CIN}=15V$	(Fig. 2)	-	2.4	3.3
$t_{on}$	Switching Time	$V_D=15V$ , $V_{CIN}=0V \rightarrow 15V$ $V_{CC}=300V$ , $I_C=75A$ $T_j=125^\circ C$ Inductive Load	$T_j=25^\circ C$	0.1	0.5	1.2
$t_{rr}$			$T_j=125^\circ C$	-	0.1	0.2
$t_{c(on)}$			(Fig. 3,4)	-	0.15	0.3
$t_{off}$				-	1.1	2.0
$t_{c(off)}$				-	0.2	0.4
$I_{CES}$	Collector-Emitter Cut-off Current	$V_{CE}=V_{CES}$ , $V_D=15V$ , $V_{CIN}=15V$ (Fig. 5)	$T_j=25^\circ C$	-	-	1
			$T_j=125^\circ C$	-	-	10

## CONTROL PART

Symbol	Parameter	Conditions	Limits			Unit	
			Min.	Typ.	Max.		
$I_D$	Circuit Current	$V_D=15V, V_{CIN}=15V$	$V_{N1}-V_{NC}$	-	6.5	12	mA
			$V_{P1}-V_{PC}$	-	1.6	4.0	
$V_{th(ON)}$	Input ON Threshold Voltage	Applied between : $UP-V_{UPC}, VP-V_{VPC}, UN \cdot VN-V_{NC}$	1.2	1.5	1.8	V	
$V_{th(OFF)}$	Input OFF Threshold Voltage		1.7	2.0	2.3		
SC	Short Circuit Trip Level	$-20 \leq T_j \leq 125^\circ C, V_D=15V$	(Fig. 3, 6)	112	-	-	A
$t_{off(SC)}$	Short Circuit Current Delay Time	$V_D=15V$	(Fig. 3, 6)	-	0.2	-	$\mu s$
OT	Over Temperature Protection	Detect Temperature of IGBT chip	Trip level	135	-	-	$^\circ C$
			Hysteresis	-	20	-	
UV <sub>t</sub>	Supply Circuit Under-Voltage Protection	$-20 \leq T_j \leq 125^\circ C$	Trip level	11.5	12.0	12.5	V
			Reset level	-	12.5	-	
$I_{FO(H)}$	Fault Output Current	$V_D=15V, V_{FO}=15V$	(Note.2)	-	-	0.01	mA
			(Note.2)	-	10	15	
$t_{FO}$	Fault Output Pulse Width	$V_D=15V$	(Note.2)	1.0	1.8	-	ms

Note.2: Fault output is given only when the internal SC, OT & UV protections schemes of either upper or lower arm device operate to protect it.


## MECHANICAL RATINGS AND CHARACTERISTICS

Symbol	Parameter	Conditions	Limits			Unit	
			Min.	Typ.	Max.		
$M_s$	Mounting Torque	Mounting part	screw : M4	1.4	1.65	1.9	N·m
m	Weight	-	-	135	-	g	

## RECOMMENDED CONDITIONS FOR USE

Symbol	Parameter	Conditions	Recommended value	Unit
$V_{CC}$	Supply Voltage	Applied across P-N terminals	$\leq 450$	V
$V_D$	Control Supply Voltage	Applied between : $V_{UP1}-V_{UPC}, V_{VP1}-V_{VPC}, V_{N1}-V_{NC}$ (Note.3)	$15.0 \pm 1.5$	V
$V_{CIN(ON)}$	Input ON Voltage	Applied between : $UP-V_{UPC}, VP-V_{VPC}, UN \cdot VN-V_{NC}$	$\leq 0.8$	V
$V_{CIN(OFF)}$	Input OFF Voltage		$\geq 9.0$	
$f_{PWM}$	PWM Input Frequency	Using Application Circuit of Fig. 8	$\leq 20$	kHz
$t_{dead}$	Arm Shoot-through Blocking Time	For IPM's each input signals (Fig. 7)	$\geq 2.0$	$\mu s$
$I_O$	Module Operating Current	RMS	$\leq 30$	A

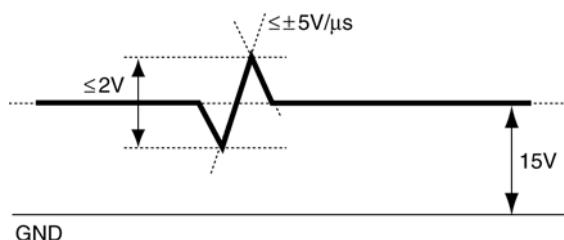Note.3: With ripple satisfying the following conditions:  $dv/dt$  swing  $\leq \pm 5V/\mu s$ , Variation  $\leq 2V$  peak to peak



## PRECAUTIONS FOR TESTING

1. Before applying any control supply voltage ( $V_D$ ), the input terminals should be pulled up by resistors, etc. to their corresponding supply voltage and each input signal should be kept off state.  
After this, the specified ON and OFF level setting for each input signal should be done.
2. When performing "SC" tests, the turn-off surge voltage spike at the corresponding protection operation should not be allowed to rise above  $V_{CES}$  rating of the device.  
(These test should not be done by using a curve tracer or its equivalent.)

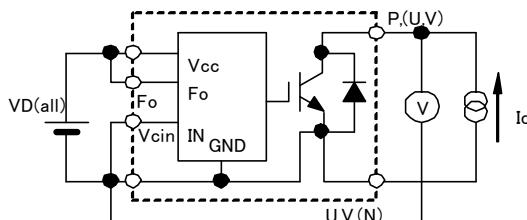
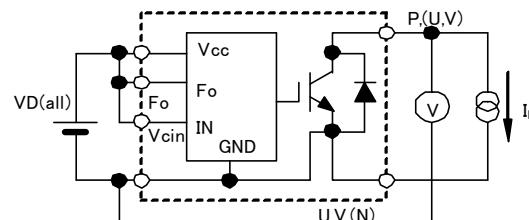
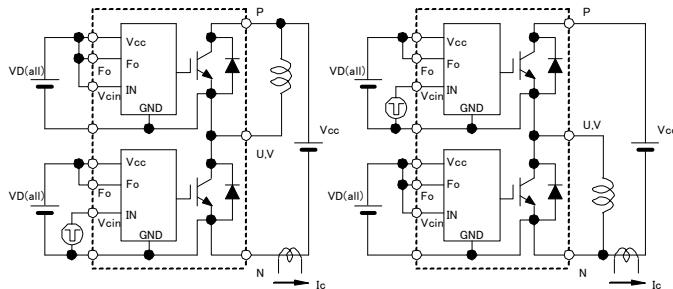
Fig. 1  $V_{CESat}$  TestFig. 2  $V_{EC}$  Test

Fig. 3 Switching time and SC test circuit

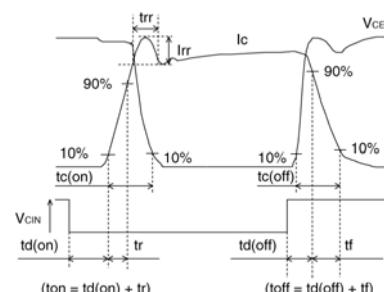


Fig. 4 Switching time test waveform


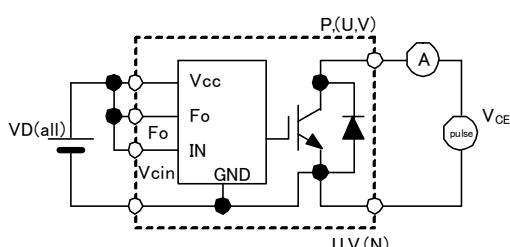
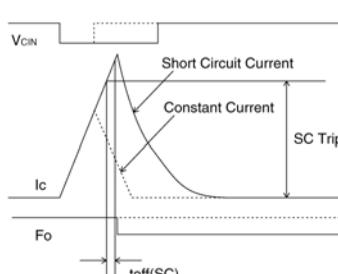
Fig. 5  $I_{CES}$  Test

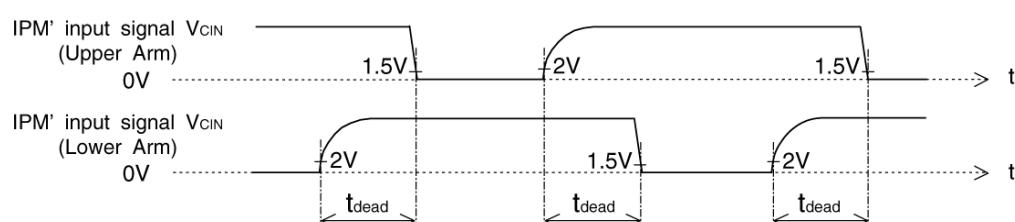Fig. 6 SC test waveform



1.5V: Input on threshold voltage  $V_{th(on)}$  typical value, 2V: Input off threshold voltage  $V_{th(off)}$  typical value

Fig. 7 Dead time measurement point example

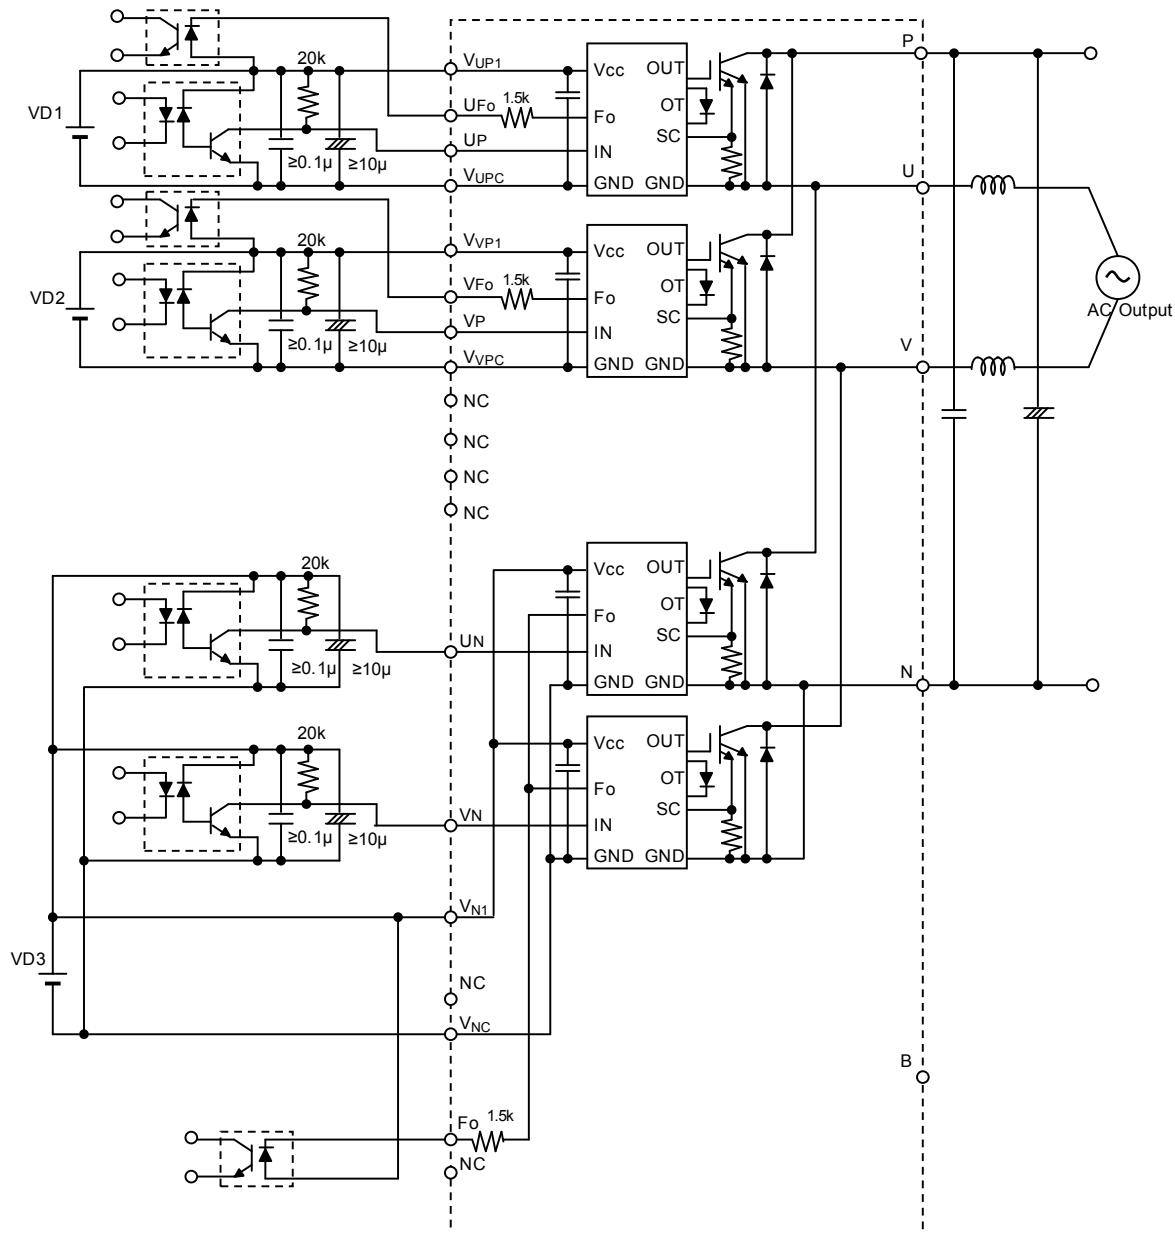
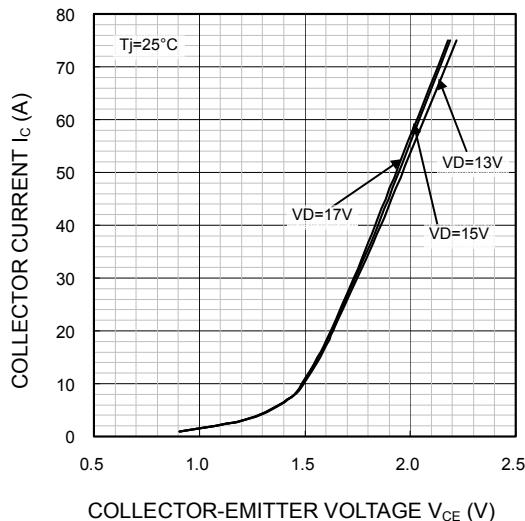
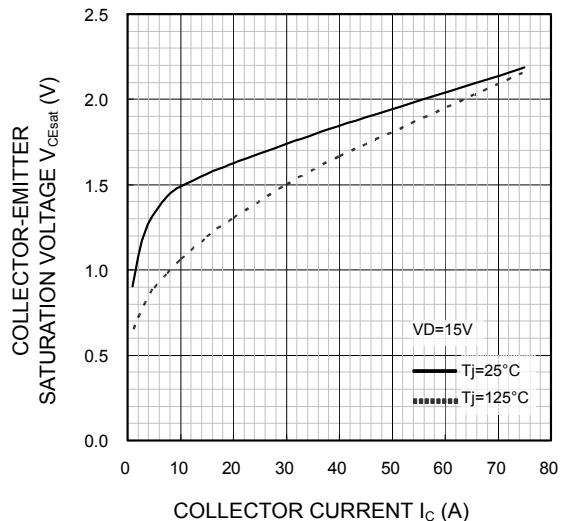
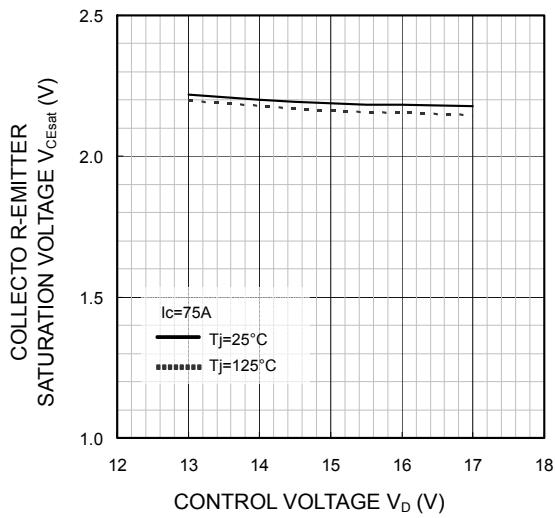
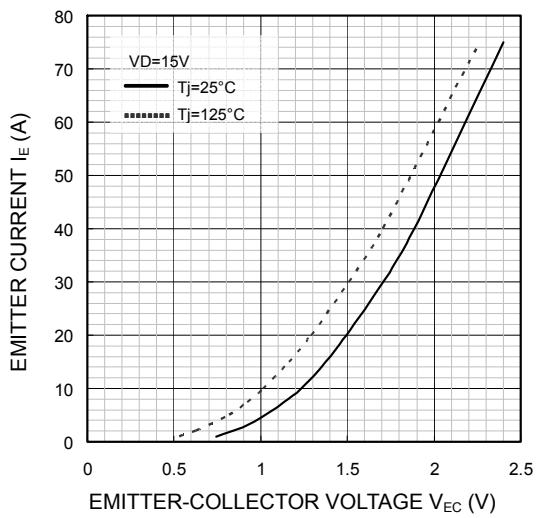



Fig. 8 Application Example Circuit

**NOTES FOR STABLE AND SAFE OPERATION :**

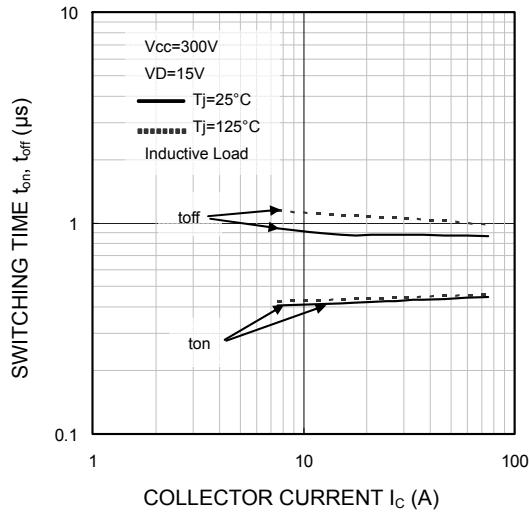
- Design the PCB pattern to minimize wiring length between opto-coupler and IPM's input terminal, and also to minimize the stray capacity between the input and output wirings of opto-coupler.
- Connect low impedance capacitor between the Vcc and GND terminal of each fast switching opto-coupler.
- Fast switching opto-couplers:  $t_{PLH}, t_{PHL} \leq 0.8\mu s$ , Use High CMR type.
- Slow switching opto-coupler: CTR > 100%
- Use 3 isolated control power supplies (V<sub>D</sub>). Also, care should be taken to minimize the instantaneous voltage change of the power supply.
- Make inductance of DC bus line as small as possible, and minimize surge voltage using snubber capacitor between P and N terminal.

**PERFORMANCE CURVES****OUTPUT CHARACTERISTICS**(TYPICAL)  
INVERTER PART**COLLECTOR-EMITTER SATURATION VOLTAGE (VS.  $I_c$ ) CHARACTERISTICS**(TYPICAL)  
INVERTER PART**COLLECTOR-EMITTER SATURATION VOLTAGE (VS.  $V_D$ ) CHARACTERISTICS (TYPICAL) INVERTER PART****FREE WHEELING DIODE FORWARD CHARACTERISTICS (TYPICAL) INVERTER PART**


**SWITCHING TIME ( $t_{on}$ ,  $t_{off}$ ) CHARACTERISTICS  
(TYPICAL)  
INVERTER PART**



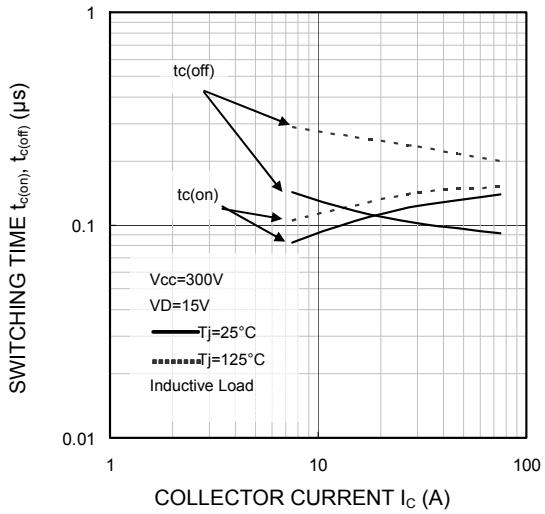
**SWITCHING TIME ( $t_{c(on)}, t_{c(off)}$ ) CHARACTERISTICS  
(TYPICAL)  
INVERTER PART**



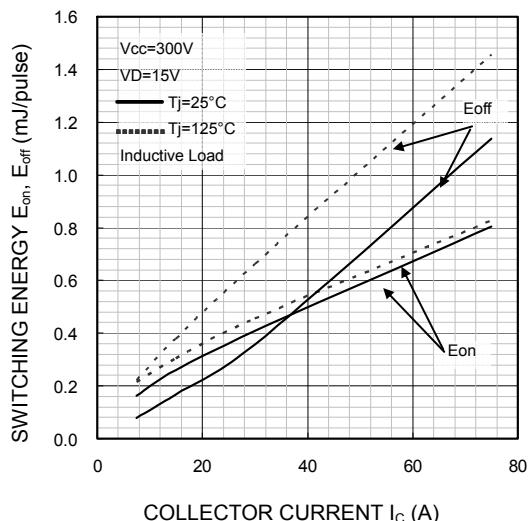
**SWITCHING ENERGY CHARACTERISTICS  
(TYPICAL)  
INVERTER PART**



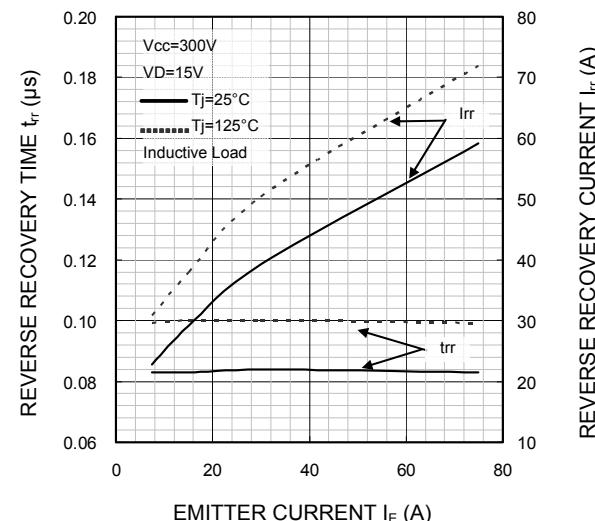
**FREE WHEELING DIODE  
REVERSE RECOVERY CHARACTERISTICS  
(TYPICAL)  
INVERTER PART**



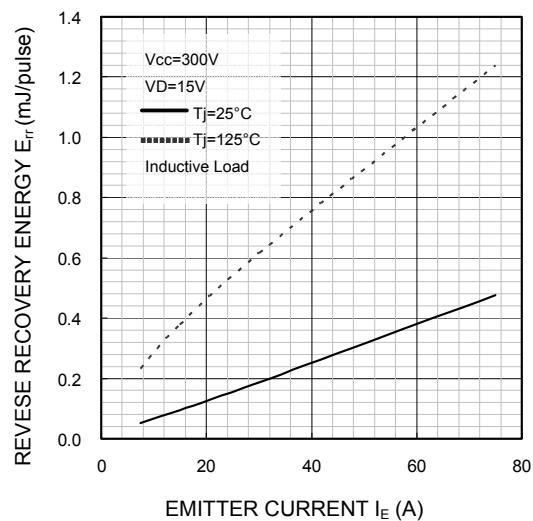
**FREE WHEELING DIODE  
REVERSE RECOVERY ENERGY CHARACTERISTICS  
(TYPICAL)  
INVERTER PART**



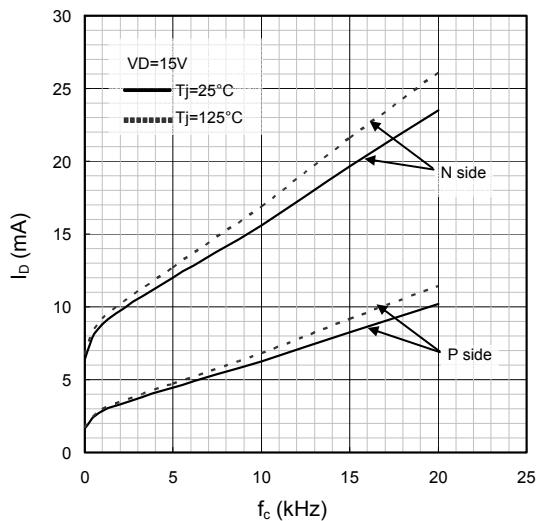**$I_D$  VS.  $f_c$  CHARACTERISTICS  
(TYPICAL)**



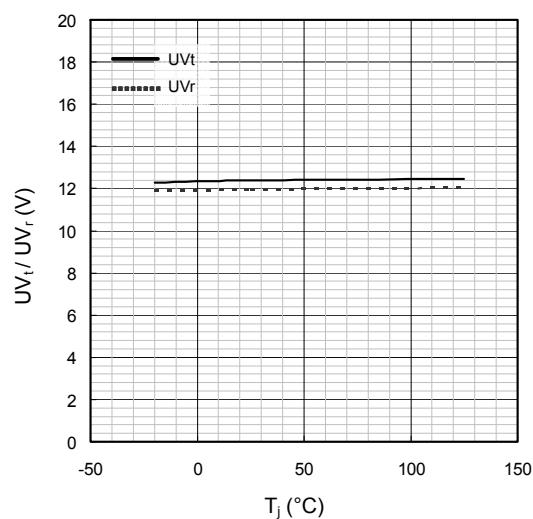**UV TRIP LEVEL VS.  $T_j$  CHARACTERISTICS  
(TYPICAL)**



**SC TRIP LEVEL VS.  $T_j$  CHARACTERISTICS  
(TYPICAL)  
INVERTER PART**

