

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

PMA15F


Ordering information

PM A 15 F -□ -□

① ② ③ ④ ⑤ ⑥



RoHS

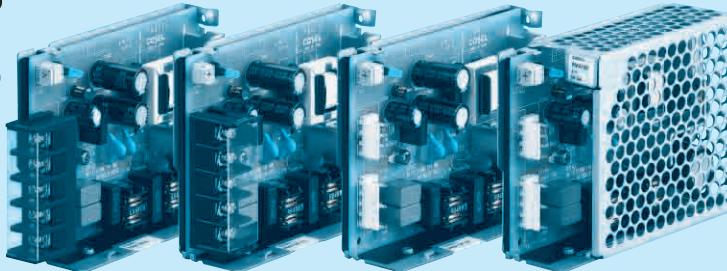Horizontal terminal block
(option : -T1)Vertical terminal block
(option : -T)

Standard type

with Cover
(option : -N)Recommended EMI/EMC Filter
NAM-04-000Low leakage current type : NAM series
*The EMI/EMC Filter is recommended to connect with several devices.

- ① Series name
- ② Single output
- ③ Output wattage
- ④ Universal input
- ⑤ Output voltage
- ⑥ Optional ^{**}

T : Vertical terminal block

T1: Horizontal terminal block

N : with Cover

J1 : VH(J.S.T.)connector type

Specification is changed at option, refer to Instruction Manual.

| MODEL | PMA15F-3R3 | PMA15F-5 | PMA15F-12 | PMA15F-15 | PMA15F-24 |
|-----------------------|------------|----------|-----------|-----------|-----------|
| MAX OUTPUT WATTAGE[W] | 9.9 | 15 | 15.6 | 15 | 16.8 |
| DC OUTPUT | 3.3V 3A | 5V 3A | 12V 1.3A | 15V 1A | 24V 0.7A |

SPECIFICATIONS

| | MODEL | PMA15F-3R3 | PMA15F-5 | PMA15F-12 | PMA15F-15 | PMA15F-24 |
|-------------------------------|--------------------------------------|--|--|------------------|------------------|------------------|
| INPUT | VOLTAGE[V] | AC85 - 264 1φ (Refer to the Instruction Manual 1.1 and 3.2) *3 | | | | |
| | CURRENT[A] | ACIN 100V 0.30typ (Io=100%) ACIN 200V 0.15typ (Io=100%) | 0.40typ (Io=100%) 0.20typ (Io=100%) | | | |
| | FREQUENCY[Hz] | 50 / 60 (47 - 440) | | | | |
| | EFFICIENCY[%] | ACIN 100V 66typ ACIN 200V 67typ | 70typ 74typ | 74typ 78typ | 76typ 79typ | 76typ 79typ |
| | INRUSH CURRENT[A] | ACIN 100V 15typ (Io=100%) (At cold start) ACIN 200V 30typ (Io=100%) (At cold start) | | | | |
| | LEAKAGE CURRENT[mA] | 0.05/0.10max (ACIN 100V / 240V 60Hz, Io=100%, According to IEC60601-1) | | | | |
| OUTPUT | VOLTAGE[V] | 3.3 | 5 | 12 | 15 | 24 |
| | CURRENT[A] | 3.0 | 3.0 | 1.3 | 1.0 | 0.7 |
| | LINE REGULATION[mV] | 20max | 20max | 48max | 60max | 96max |
| | LOAD REGULATION[mV] | 40max | 40max | 100max | 120max | 150max |
| | RIPPLE[mVp-p] *1 | 0 to +50°C 80max -10 - 0°C 140max | 80max 140max | 120max 160max | 120max 160max | 120max 160max |
| | RIPPLE NOISE[mVp-p] *1 | 0 to +50°C 120max -10 - 0°C 160max | 120max 160max | 150max 180max | 150max 180max | 150max 180max |
| | TEMPERATURE REGULATION[mV] *1 | 0 to +50°C 50max -10 to +50°C 60max | 50max 60max | 120max 150max | 150max 180max | 240max 290max |
| | DRIFT[mV] *2 | 20max | 20max | 48max | 60max | 96max |
| | START-UP TIME[ms] | 200typ (ACIN 100V, Io=100%) *Start-up time is 700ms typ for less than 1 minute of applying input again from turning off the input voltage. | | | | |
| | HOLD-UP TIME[ms] | 20typ (ACIN 100V, Io=100%) | | | | |
| | OUTPUT VOLTAGE ADJUSTMENT RANGE[V] | 2.85 to 3.60 | 4.50 to 5.50 | 10.00 to 13.20 | 13.20 to 18.00 | 19.20 to 27.00 |
| | OUTPUT VOLTAGE SETTING[V] | 3.30 to 3.40 | 5.00 to 5.15 | 12.00 to 12.48 | 15.00 to 15.60 | 24.00 to 24.96 |
| PROTECTION CIRCUIT AND OTHERS | OVERCURRENT PROTECTION | Works over 105% of rating and recovers automatically | | | | |
| | OVERVOLTAGE PROTECTION[V] | 4.00 to 5.25 | 5.75 to 7.00 | 15.00 to 18.00 | 20.00 to 25.00 | 30.00 to 37.00 |
| | OPERATING INDICATION | LED (Green) | | | | |
| | REMOTE ON/OFF | Not provided | | | | |
| ISOLATION | INPUT-OUTPUT | AC4,000V 1 minute, Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature) | | | | |
| | INPUT-FG | AC2,000V 1 minute, Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature) | | | | |
| | OUTPUT-FG | AC500V 1 minute, Cutoff current = 25mA, DC500V 50MΩ min (At Room Temperature) | | | | |
| ENVIRONMENT | OPERATING TEMP., HUMID. AND ALTITUDE | -10 to +70°C, 20 - 90%RH (Non condensing), 3,000m (10,000 feet) max *3 | | | | |
| | STORAGE TEMP., HUMID. AND ALTITUDE | -20 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000 feet) max | | | | |
| | VIBRATION | 10 - 55Hz, 19.6m/s² (2G), 3 minutes period, 60 minutes each along X, Y and Z axis | | | | |
| | IMPACT | 196.1m/s² (20G), 11ms, once each X, Y and Z axis | | | | |
| SAFETY AND NOISE REGULATIONS | AGENCY APPROVALS | UL60601-1, C-UL (CSA-C22.2 No.601.1), EN60601-1 | | | | |
| | CONDUCTED NOISE | Complies with FCC-B, VCCI-B, CISPR11-B, CISPR22-B, EN55011-B, EN55022-B | | | | |
| | HARMONIC ATTENUATOR | Complies with IEC61000-3-2 (Class A) *6 (Not built-in to active filter *4) | | | | |
| OTHERS | CASE SIZE/WEIGHT | 31 X 78 X 103mm [1.22 X 3.07 X 4.06 inches] (W X H X D) / 230g max (with cover : 265g max) | | | | |
| | COOLING METHOD | Convection | | | | |

*1 Measured by 20MHz oscilloscope or Ripple-Noise meter (equivalent to KEISOKU-GIKEN: RM101).

*2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C.

*3 Derating is required.

*4 When two or more units are used, they may not comply with the harmonic attenuator. Please contact us for details.

*5 Please contact us about safety approvals for the model with option.


*6 Please contact us about another class.

* Parallel operation with other model is not possible.

* Derating is required when operated with cover.


* A sound may occur from power supply at peak loading.

Block diagram

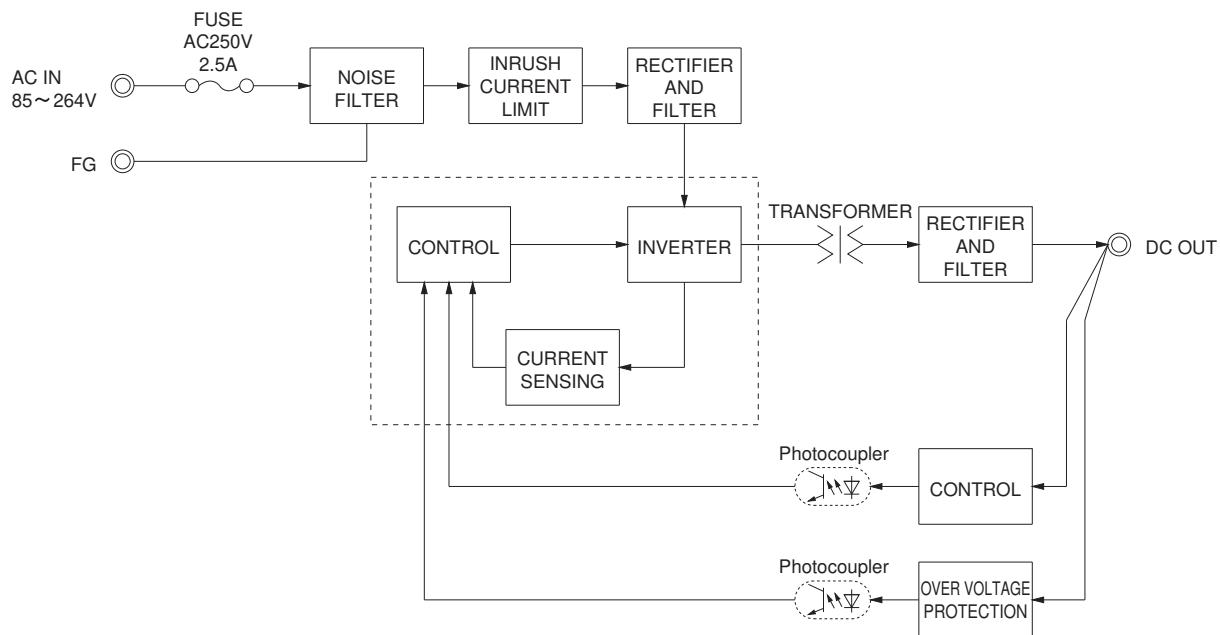

External view

※ External size of option T, T1 and N is different from standard model and refer to 4 Option of instruction manual for details.

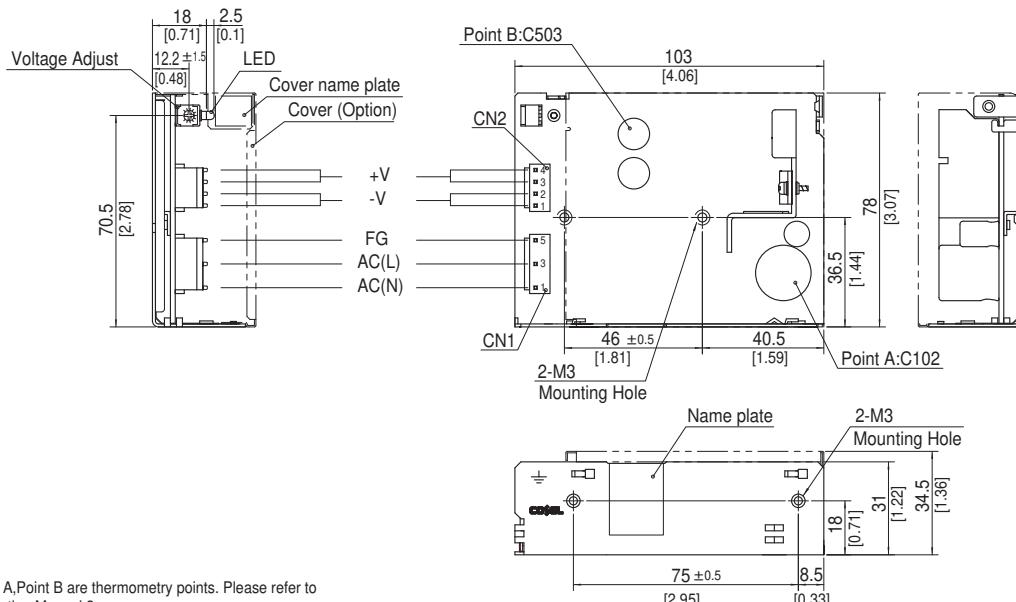

※ Point A, Point B are thermometry points. Please refer to Instruction Manual 3.

| I/O Connector | Mating Connector | Terminal |
|-----------------|------------------|------------------------------------|
| CN1 1-1123724-3 | 1-1123722-5 | Chain 1123721-1 Loose 1318912-1 |
| CN2 1-1123724-4 | 1-1123722-4 | Chain 1123721-1 Loose 1318912-1 |

(Mfr : Tyco Electronics AMP)

※ I/O Connector is Mfr.Tyco Electronics AMP

※ Option : -J1 : (J.S.T) connector type

-T : Vertical terminal block type

-T1 : Horizontal terminal block type

Refer to Instruction Manual 4.

<PIN CONNECTION>

CN1

| Pin No. | Input |
|---------|-------|
| 1 | AC(N) |
| 2 | |
| 3 | AC(L) |
| 4 | |
| 5 | FG |

CN2

| Pin No. | Output |
|---------|--------|
| 1, 2 | -V |
| 3, 4 | +V |

※ Tolerance : ±1 [±0.04]

※ Weight : 230g max (with cover : 265g max)

※ PCB Material/Thickness : CEM-3 / 1.6mm [0.06inches]

※ Chassis material : Electric galvanizing steel board

※ Keep drawing current per pin below 5A of CN2.

※ Dimensions in mm, []=inches

※ Mounting torque : 0.6N · m (6.3kgf · cm) max

※ Please connect safety ground to the unit in 2-M3 holes.

PMA30F


Ordering information

PM A 30 F -□ -□

① ② ③ ④ ⑤ ⑥



RoHS

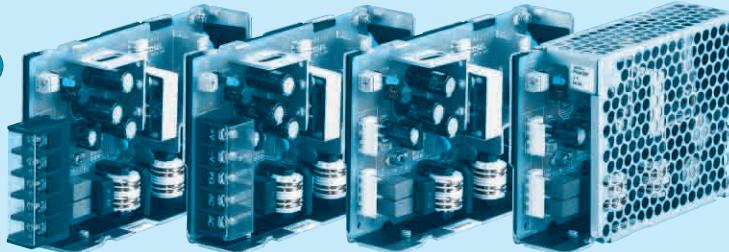Horizontal terminal block
(option : -T1)Vertical terminal block
(option : -T)

Standard type

with Cover
(option : -N)Recommended EMI/EMC Filter
NAM-04-000Low leakage current type : NAM series
*The EMI/EMC Filter is recommended to connect with several devices.

- ① Series name
- ② Single output
- ③ Output wattage
- ④ Universal input
- ⑤ Output voltage
- ⑥ Optional ^{**}

T : Vertical terminal block

T1: Horizontal terminal block

N : with Cover

J1 : VH(J.S.T.)connector type

Specification is changed at option, refer to Instruction Manual.

| MODEL | PMA30F-3R3 | PMA30F-5 | PMA30F-12 | PMA30F-15 | PMA30F-24 |
|-----------------------|------------|----------|-----------|-----------|-----------|
| MAX OUTPUT WATTAGE[W] | 19.8 | 30 | 30 | 30 | 31.2 |
| DC OUTPUT | 3.3V 6A | 5V 6A | 12V 2.5A | 15V 2A | 24V 1.3A |

SPECIFICATIONS

| | MODEL | PMA30F-3R3 | PMA30F-5 | PMA30F-12 | PMA30F-15 | PMA30F-24 |
|-------------------------------|--------------------------------------|--|--|------------------|------------------|------------------|
| INPUT | VOLTAGE[V] | AC85 - 264 1φ (Refer to the Instruction Manual 1.1 and 3.2) *3 | | | | |
| | CURRENT[A] | ACIN 100V 0.50typ (Io=100%) ACIN 200V 0.30typ (Io=100%) | 0.70typ (Io=100%) 0.40typ (Io=100%) | | | |
| | FREQUENCY[Hz] | 50 / 60 (47 - 440) | | | | |
| | EFFICIENCY[%] | ACIN 100V 67typ ACIN 200V 69typ | 71typ 74typ | 76typ 78typ | 77typ 80typ | 77typ 80typ |
| | INRUSH CURRENT[A] | ACIN 100V 15typ (Io=100%) (At cold start) ACIN 200V 30typ (Io=100%) (At cold start) | | | | |
| | LEAKAGE CURRENT[mA] | 0.05 / 0.10max (ACIN 100V / 240V 60Hz, Io=100%, According to IEC60601-1) | | | | |
| OUTPUT | VOLTAGE[V] | 3.3 | 5 | 12 | 15 | 24 |
| | CURRENT[A] | 6.0 | 6.0 | 2.5 | 2.0 | 1.3 |
| | LINE REGULATION[mV] | 20max | 20max | 48max | 60max | 96max |
| | LOAD REGULATION[mV] | 40max | 40max | 100max | 120max | 150max |
| | RISSLE[mVp-p] | 0 to +50°C 80max -10 - 0°C 140max | 80max 140max | 120max 160max | 120max 160max | 120max 160max |
| | RISSLE NOISE[mVp-p] | 0 to +50°C 120max -10 - 0°C 160max | 120max 160max | 150max 180max | 150max 180max | 150max 180max |
| | TEMPERATURE REGULATION[mV] | 0 to +50°C 50max -10 to +50°C 60max | 50max 60max | 120max 150max | 150max 180max | 240max 290max |
| | DRIFT[mV] | *2 20max | 20max | 48max | 60max | 96max |
| | START-UP TIME[ms] | 200typ (ACIN 100V, Io=100%) *Start-up time is 700ms typ for less than 1 minute of applying input again from turning off the input voltage. | | | | |
| | HOLD-UP TIME[ms] | 20typ (ACIN 100V, Io=100%) | | | | |
| | OUTPUT VOLTAGE ADJUSTMENT RANGE[V] | 2.85 to 3.60 | 4.50 to 5.50 | 10.00 to 13.20 | 13.20 to 18.00 | 19.20 to 27.00 |
| | OUTPUT VOLTAGE SETTING[V] | 3.30 to 3.40 | 5.00 to 5.15 | 12.00 to 12.48 | 15.00 to 15.60 | 24.00 to 24.96 |
| PROTECTION CIRCUIT AND OTHERS | OVERCURRENT PROTECTION | Works over 105% of rating and recovers automatically | | | | |
| | OVERVOLTAGE PROTECTION[V] | 4.00 to 5.25 | 5.75 to 7.00 | 15.00 to 18.00 | 20.00 to 25.00 | 30.00 to 37.00 |
| | OPERATING INDICATION | LED (Green) | | | | |
| | REMOTE ON/OFF | Not provided | | | | |
| ISOLATION | INPUT-OUTPUT | AC4,000V 1 minute, Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature) | | | | |
| | INPUT-FG | AC2,000V 1 minute, Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature) | | | | |
| | OUTPUT-FG | AC500V 1 minute, Cutoff current = 25mA, DC500V 50MΩ min (At Room Temperature) | | | | |
| ENVIRONMENT | OPERATING TEMP., HUMID. AND ALTITUDE | -10 to +70°C, 20 - 90%RH (Non condensing), 3,000m (10,000feet) max *3 | | | | |
| | STORAGE TEMP., HUMID. AND ALTITUDE | -20 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000feet) max | | | | |
| | VIBRATION | 10 - 55Hz, 19.6m/s ² (2G), 3 minutes period, 60 minutes each along X, Y and Z axis | | | | |
| | IMPACT | 196.1m/s ² (20G), 11ms, once each X, Y and Z axis | | | | |
| SAFETY AND NOISE REGULATIONS | AGENCY APPROVALS | UL60601-1, C-UL (CSA-C22.2 No.601.1), EN60601-1 | | | | |
| | CONDUCTED NOISE | Complies with FCC-B, VCCI-B, CISPR11-B, CISPR22-B, EN55011-B, EN55022-B | | | | |
| | HARMONIC ATTENUATOR | Complies with IEC61000-3-2 (Class A) *6 (Not built-in to active filter *4) | | | | |
| OTHERS | CASE SIZE/WEIGHT | 31 X 82 X 120mm [1.22 X 3.23 X 4.72 inches] (W X H X D) / 240g max (with cover : 280g max) | | | | |
| | COOLING METHOD | Convection | | | | |

*1 Measured by 20MHz oscilloscope or Ripple-Noise meter (equivalent to KEISOKU-GIKEN: RM101).

*2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C.

*3 Derating is required.

*4 When two or more units are used, they may not comply with the harmonic attenuator. Please contact us for details.

*5 Please contact us about safety approvals for the model with option.


*6 Please contact us about another class.

* Parallel operation with other model is not possible.

* Derating is required when operated with cover.


* A sound may occur from power supply at peak loading.

Block diagram

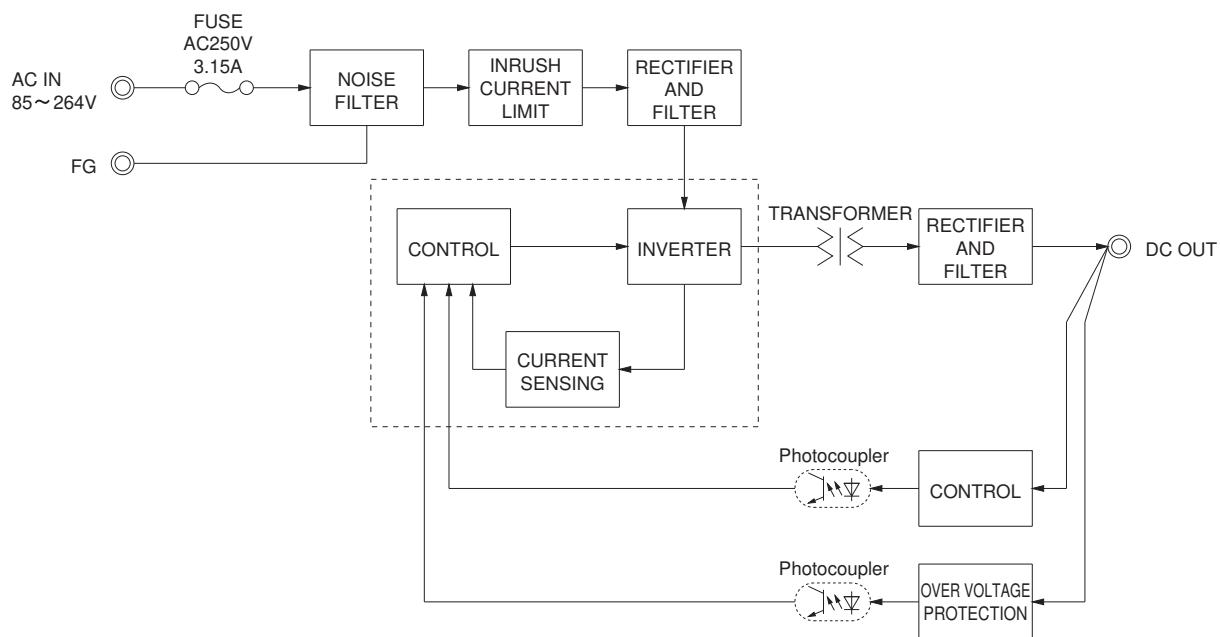

External view

※ External size of option T, T1 and N is different from standard model and refer to 4 Option of instruction manual for details.

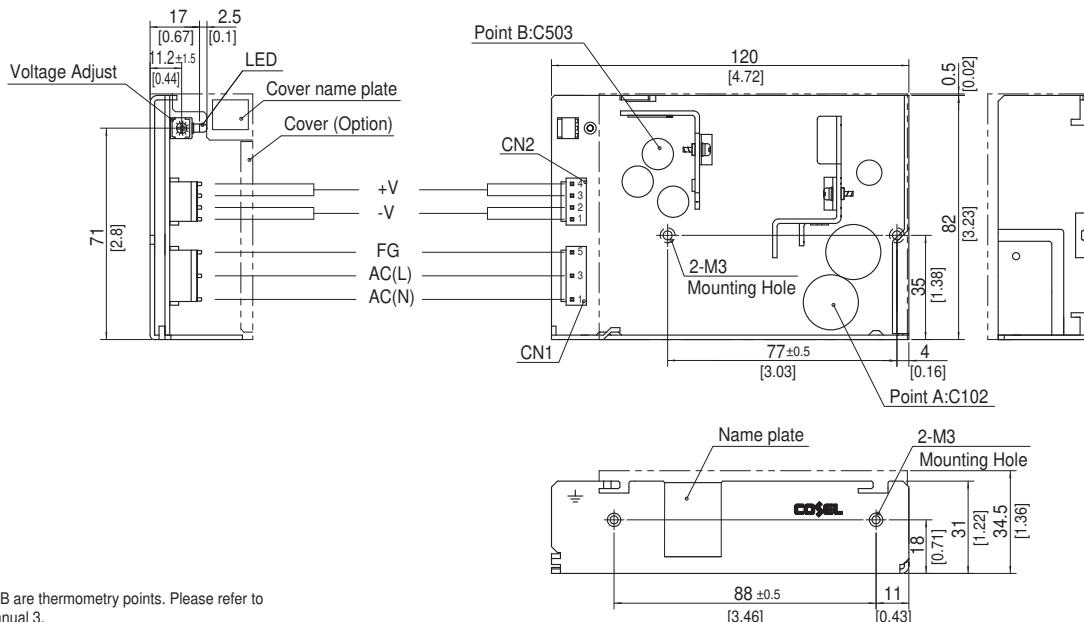

※ Point A, Point B are thermometry points. Please refer to Instruction Manual 3.

| I/O Connector | Mating Connector | Terminal |
|-----------------|------------------|-----------------|
| CN1 1-1123724-3 | 1-1123722-5 | Chain 1123721-1 |
| | | Loose 1318912-1 |
| CN2 1-1123723-4 | 1-1123722-4 | Chain 1123721-1 |
| | | Loose 1318912-1 |

(Mfr : Tyco Electronics AMP)

※ I/O Connector is Mfr.Tyco Electronics AMP

※ Option : -J1 : (J.S.T) connector type

-T : Vertical terminal block type

-T1 : Horizontal terminal block type

Refer to Instruction Manual 4.

<PIN CONNECTION>

CN1

| Pin No. | Input |
|---------|-------|
| 1 | AC(N) |
| 2 | |
| 3 | AC(L) |
| 4 | |
| 5 | FG |

CN2

| Pin No. | Output |
|---------|--------|
| 1, 2 | -V |
| 3, 4 | +V |

※ Tolerance : ± 1 [± 0.04]

※ Weight : 240g max (with cover : 280g max)

※ PCB Material/Thickness : CEM-3 / 1.6mm [0.06inches]

※ Chassis material : Aluminum

※ Keep drawing current per pin bellow 5A of CN2.

※ Dimensions in mm. []=inches

※ Mounting torque : 0.49N · m (5kgf · cm) max

※ Please connect safety ground to the unit in 2-M3 holes.

PMA60F

Ordering information

PM A 60 F -□ -□

① ② ③ ④ ⑤ ⑥



RoHS

Horizontal terminal block
(option : -T1)Vertical terminal block
(option : -T)

Standard type

with Cover
(option : -N)Recommended EMI/EMC Filter
NAM-04-000Low leakage current type : NAM series
*The EMI/EMC Filter is recommended to connect with several devices.

- ① Series name
- ② Single output
- ③ Output wattage
- ④ Universal input
- ⑤ Output voltage
- ⑥ Optional ^{*5}

T : Vertical terminal block

T1: Horizontal terminal block

N : with Cover

J1 : VH(J.S.T.)connector type

R : with Remote ON/OFF

Specification is changed at option, refer to Instruction Manual.

| MODEL | PMA60F-3R3 | PMA60F-5 | PMA60F-12 | PMA60F-15 | PMA60F-24 |
|-----------------------|------------|----------|-----------|-----------|-----------|
| MAX OUTPUT WATTAGE[W] | 39.6 | 60 | 60 | 60 | 60 |
| DC OUTPUT | 3.3V 12A | 5V 12A | 12V 5A | 15V 4A | 24V 2.5A |

SPECIFICATIONS

| | MODEL | PMA60F-3R3 | PMA60F-5 | PMA60F-12 | PMA60F-15 | PMA60F-24 |
|-------------------------------------|--------------------------------------|---|--------------------------------------|------------------|------------------|------------------|
| INPUT | VOLTAGE[V] | AC85 - 264 1φ (Refer to the Instruction Manual 1.1) | | | | |
| | CURRENT[A] | ACIN 100V 0.7typ (Io=100%) ACIN 200V 0.4typ (Io=100%) | 0.8typ (Io=100%) 0.5typ (Io=100%) | | | |
| | FREQUENCY[Hz] | 50 / 60 (47 - 63) | | | | |
| | EFFICIENCY[%] | ACIN 100V 77typ ACIN 200V 78typ | 80typ 83typ | 80typ 82typ | 81typ 83typ | 81typ 83typ |
| | POWER FACTOR (Io=100%) | ACIN 100V 0.98typ ACIN 200V 0.85typ | 0.90typ | | | |
| | INRUSH CURRENT[A] | ACIN 100V 15typ (Io=100%) (At cold start) ACIN 200V 30typ (Io=100%) (At cold start) | | | | |
| | LEAKAGE CURRENT[mA] | 0.09 / 0.18max (ACIN 100V / 240V 60Hz, Io=100%, According to IEC60601-1) | | | | |
| | VOLTAGE[V] | 3.3 | 5 | 12 | 15 | 24 |
| | CURRENT[A] | 12.0 | 12.0 | 5.0 | 4.0 | 2.5 |
| OUTPUT | LINE REGULATION[mV] | 20max | 20max | 48max | 60max | 96max |
| | LOAD REGULATION[mV] | 40max | 40max | 100max | 120max | 150max |
| | RIPPLE[mVp-p] | 0 to +50°C 80max -10 to 0°C 140max | 80max 140max | 120max 160max | 120max 160max | 120max 160max |
| | RIPPLE NOISE[mVp-p] | 0 to +50°C 120max -10 to 0°C 160max | 120max 160max | 150max 180max | 150max 180max | 150max 180max |
| | TEMPERATURE REGULATION[mV] | 0 to +50°C 50max -10 to +50°C 60max | 50max 60max | 120max 150max | 150max 180max | 240max 290max |
| | DRIFT[mV] | *2 20max | 20max | 48max | 60max | 96max |
| | START-UP TIME[ms] | 250typ (ACIN 100V, Io=100%) | | | | |
| | HOLD-UP TIME[ms] | 20typ (ACIN 100V, Io=100%) | | | | |
| | OUTPUT VOLTAGE ADJUSTMENT RANGE[V] | 2.85 to 3.60 | 4.50 to 5.50 | 10.00 to 13.20 | 13.20 to 18.00 | 19.20 to 27.00 |
| PROTECTION CIRCUIT AND OTHERS | OUTPUT VOLTAGE SETTING[V] | 3.30 to 3.40 | 5.00 to 5.15 | 12.00 to 12.48 | 15.00 to 15.60 | 24.00 to 24.96 |
| | OVERCURRENT PROTECTION | Works over 105% of rating and recovers automatically | | | | |
| | OVERVOLTAGE PROTECTION[V] | 4.00 to 5.25 | 5.75 to 7.00 | 15.00 to 18.00 | 20.00 to 25.00 | 30.00 to 37.00 |
| | OPERATING INDICATION | LED (Green) | | | | |
| ISOLATION | REMOTE ON/OFF | Optional (Required external power source) | | | | |
| | INPUT-OUTPUT-RC | *3 AC4,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature) | | | | |
| | INPUT-FG | AC2,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature) | | | | |
| | OUTPUT-RC-FG | *3 AC500V 1minute, Cutoff current = 25mA, DC500V 50MΩ min (At Room Temperature) | | | | |
| ENVIRONMENT | OPERATING TEMP., HUMID. AND ALTITUDE | -10 to +70°C, 20 - 90%RH (Non condensing), 3,000m (10,000feet) max *4 | | | | |
| | STORAGE TEMP., HUMID. AND ALTITUDE | -20 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000feet) max | | | | |
| | VIBRATION | 10 - 55Hz, 19.6m/s ² (2G), 3minutes period, 60minutes each along X, Y and Z axis | | | | |
| | IMPACT | 196.1m/s ² (20G), 11ms, once each X, Y and Z axis | | | | |
| SAFETY AND NOISE REGULATIONS | AGENCY APPROVALS | UL60601-1, C-UL (CSA-C22.2 No.601.1), EN60601-1 | | | | |
| | CONDUCTED NOISE | Complies with FCC-B, VCCI-B, CISPR11-B, CISPR22-B, EN55011-B, EN55022-B | | | | |
| OTHERS | HARMONIC ATTENUATOR | Complies with IEC61000-3-2 *6 | | | | |
| | CASE SIZE/WEIGHT | 32×82×135mm [1.26×3.23×5.31 inches] (W×H×D) / 350g max (with cover : 395g max) | | | | |
| | COOLING METHOD | Convection | | | | |

*1 Measured by 20MHz oscilloscope or Ripple-Noise meter (equivalent to KEISOKU-GIKEN: RM101).

*2 Drift is the change in DC output for an hour period after a half-hour warm-up at 25°C.

*3 Applicable when Remote ON/OFF (optional) is added. RC is insulated with input, output and FG.

*4 Derating is required.

*5 Please contact us about safety approvals for the model with option.


*6 Please contact us about class C.

* Parallel operation with other model is not possible.

* Derating is required when operated with cover.


* A sound may occur from power supply at peak loading.

Block diagram

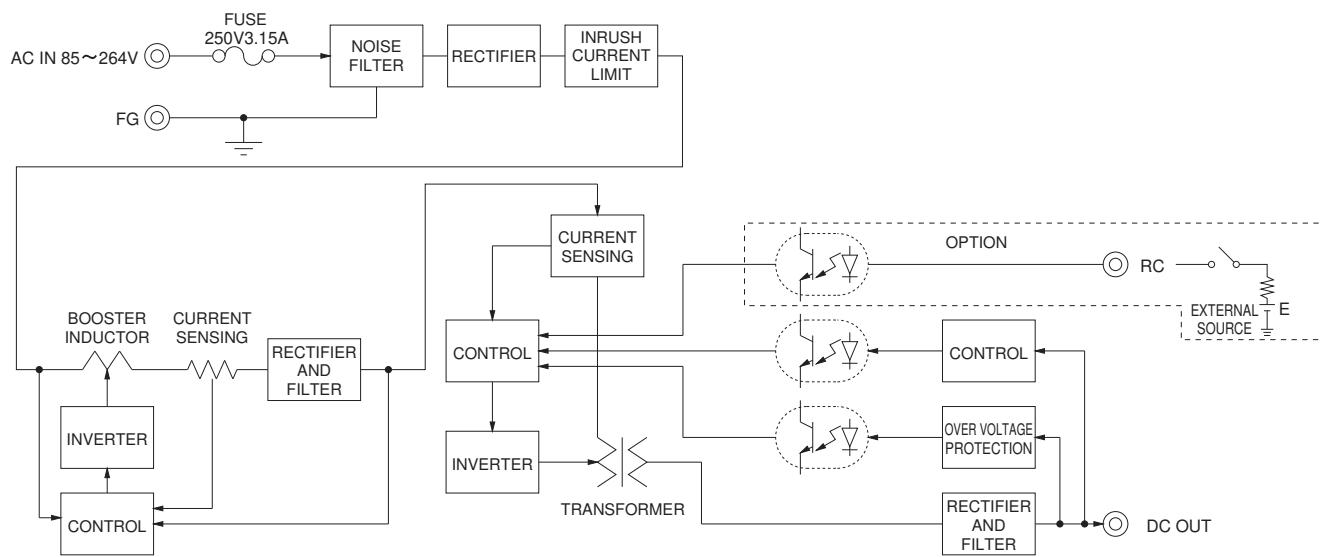

External view

※ External size of option T, T1, R and N is different from standard model and refer to 4 Option of instruction manual for details.

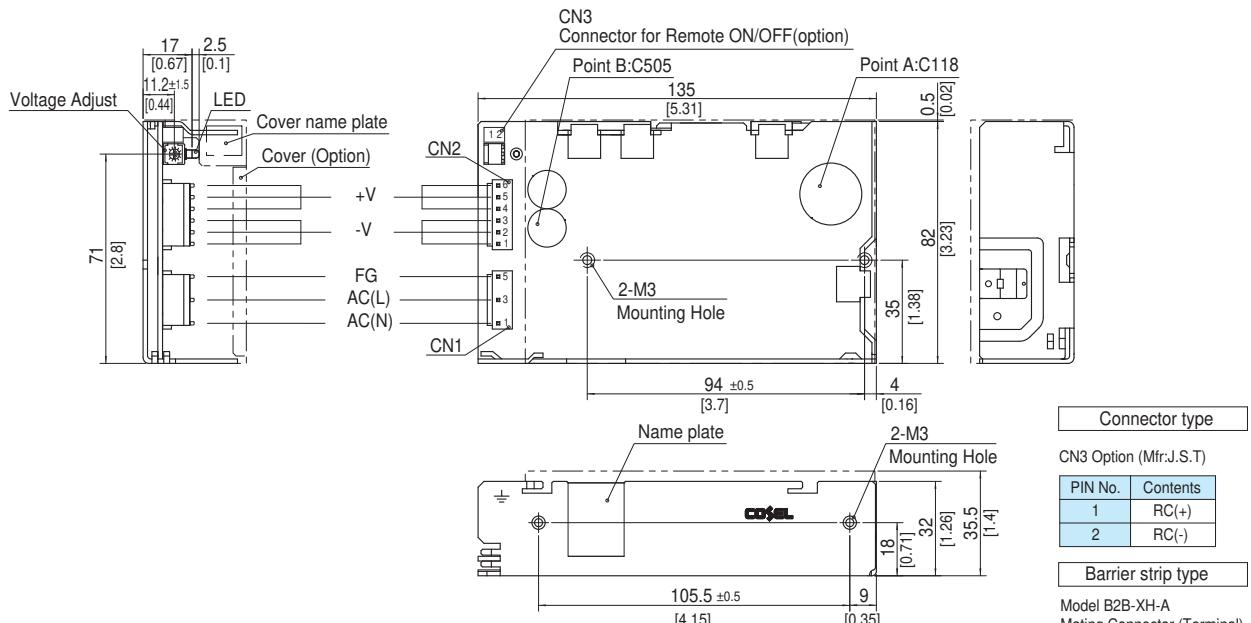

※ Point A, Point B are thermometry points. Please refer to Instruction Manual 3.

| I/O Connector | Mating Connector | Terminal | |
|---------------|------------------|----------|-----------|
| | | Chain | 1123721-1 |
| CN1 | 1-1123724-3 | Loose | 1318912-1 |
| CN2 | 1-1123723-6 | Chain | 1123721-1 |
| | | Loose | 1318912-1 |

(Mfr: Tyco Electronics AMP)

※ I/O Connector is Mfr.Tyco Electronics AMP

※ Option : -J1 : (J.S.T) connector type

-T : Vertical terminal block type

-T1 : Horizontal terminal block type

Refer to Instruction Manual 4.

<PIN CONNECTION>

| CN1 | | CN2 | |
|---------|-------|---------|--------|
| Pin No. | Input | Pin No. | Output |
| 1 | AC(N) | 1 - 3 | -V |
| 2 | | 4 - 6 | +V |
| 3 | AC(L) | | |
| 4 | | | |
| 5 | FG | | |

※ Tolerance : ±1 [±0.04]

※ Weight : 350g max (with cover : 395g max)

※ PCB Material/thickness : CEM-3 / 1.6mm [0.06inches]

※ Chassis material : Aluminum

※ Keep drawing current per pin below 5A of CN2.

※ Dimensions in mm, []=inches

※ Mounting torque : 0.49N · m (5kgf · cm) max

※ Please connect safety ground to the unit in 2-M3 holes.

PMA100F

Ordering information

PM A 100 F -□ -□

① ② ③ ④ ⑤ ⑥



RoHS

Horizontal terminal block
(option : -T1)Vertical terminal block
(option : -T)

Standard type

with Cover
(option : -N)Recommended EMI/EMC Filter
NAM-06-000Low leakage current type : NAM series
*The EMI/EMC Filter is recommended to connect with several devices.

- ① Series name
- ② Single output
- ③ Output wattage
- ④ Universal input
- ⑤ Output voltage
- ⑥ Optional

T : Vertical terminal block
T1: Horizontal terminal block
N : with Cover
J1 : VH(J.S.T.) connector type
R : with Remote ON/OFF

Specification is changed at option, refer to Instruction Manual.

| MODEL | PMA100F-3R3 | PMA100F-5 | PMA100F-12 | PMA100F-24 | PMA100F-48 |
|-----------------------|-------------|-----------|------------|------------|------------|
| MAX OUTPUT WATTAGE[W] | 66 | 100 | 102 | 108 | 100.8 |
| DC OUTPUT | 3.3V 20A | 5V 20A | 12V 8.5A | 24V 4.5A | 48V 2.1A |

SPECIFICATIONS

| | MODEL | PMA100F-3R3 | PMA100F-5 | PMA100F-12 | PMA100F-24 | PMA100F-48 |
|-------------------------------|--------------------------------------|--|--------------------------------------|------------------|------------------|------------------|
| INPUT | VOLTAGE[V] | AC85 - 264 1φ (Refer to the Instruction Manual 1.1) | | | | |
| | CURRENT[A] | ACIN 100V 0.9typ (Io=100%) ACIN 200V 0.5typ (Io=100%) | 1.3typ (Io=100%) 0.7typ (Io=100%) | | | |
| | FREQUENCY[Hz] | 50 / 60 (47 - 63) | | | | |
| | EFFICIENCY[%] | ACIN 100V 77typ ACIN 200V 78typ | 81typ 83typ | 82typ 83typ | 84typ 86typ | 84typ 86typ |
| | POWER FACTOR (Io=100%) | ACIN 100V 0.98typ ACIN 200V 0.85typ | 0.90typ | | | |
| | INRUSH CURRENT[A] | ACIN 100V 20typ (Io=100%) (At cold start) ACIN 200V 40typ (Io=100%) (At cold start) | | | | |
| | LEAKAGE CURRENT[mA] | 0.09 / 0.18max (ACIN 100V / 240V 60Hz, Io=100%, According to IEC60601-1) | | | | |
| OUTPUT | VOLTAGE[V] | 3.3 | 5 | 12 | 24 | 48 |
| | CURRENT[A] | 20.0 | 20.0 | 8.5 | 4.5 | 2.1 |
| | LINE REGULATION[mV] | 20max | 20max | 48max | 96max | 192max |
| | LOAD REGULATION[mV] | 40max | 40max | 100max | 150max | 240max |
| | RIPPLE[mVp-p] | 0 to +50°C 80max -10 - 0°C 140max | 80max 140max | 120max 160max | 120max 160max | 150max 200max |
| | RIPPLE NOISE[mVp-p] | 0 to +50°C 120max -10 - 0°C 160max | 120max 160max | 150max 180max | 150max 180max | 250max 300max |
| | TEMPERATURE REGULATION[mV] | 0 to +50°C 50max -10 to +50°C 60max | 50max 60max | 120max 150max | 240max 290max | 480max 600max |
| | DRIFT[mV] | *2 20max | 20max | 48max | 96max | 192max |
| | START-UP TIME[ms] | 250typ (ACIN 100V, Io=100%) | | | | |
| | HOLD-UP TIME[ms] | 20typ (ACIN 100V, Io=100%) | | | | |
| | OUTPUT VOLTAGE ADJUSTMENT RANGE[V] | 2.85 to 3.60 | 4.50 to 5.50 | 10.00 to 13.20 | 19.20 to 27.00 | 39.00 to 53.00 |
| | OUTPUT VOLTAGE SETTING[V] | 3.30 to 3.40 | 5.00 to 5.15 | 12.00 to 12.48 | 24.00 to 24.96 | 48.00 to 49.92 |
| PROTECTION CIRCUIT AND OTHERS | OVERCURRENT PROTECTION | Works over 105% of rating and recovers automatically | | | | |
| | OVERVOLTAGE PROTECTION[V] | 4.00 to 5.25 | 5.75 to 7.00 | 15.00 to 18.00 | 30.00 to 37.00 | 58.00 to 65.00 |
| | OPERATING INDICATION | LED (Green) | | | | |
| | REMOTE ON/OFF | Optional (Required external power source) | | | | |
| ISOLATION | INPUT-OUTPUT-RC | *3 AC4,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature) | | | | |
| | INPUT-FG | AC2,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature) | | | | |
| | OUTPUT-RC-FG | *3 AC500V 1minute, Cutoff current = 25mA, DC500V 50MΩ min (At Room Temperature) | | | | |
| ENVIRONMENT | OPERATING TEMP., HUMID. AND ALTITUDE | -10 to +70°C, 20 - 90%RH (Non condensing), 3,000m (10,000feet) max *4 | | | | |
| | STORAGE TEMP., HUMID. AND ALTITUDE | -20 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000feet) max | | | | |
| | VIBRATION | 10 - 55Hz, 19.6m/s² (2G), 3minutes period, 60minutes each along X, Y and Z axis | | | | |
| | IMPACT | 196.1m/s² (20G), 11ms, once each X, Y and Z axis | | | | |
| SAFETY AND NOISE REGULATIONS | AGENCY APPROVALS | UL60601-1, C-UL (CSA-C22.2 No.601.1), EN60601-1 | | | | |
| | CONDUCTED NOISE | Complies with FCC-B, VCCI-B, CISPR11-B, CISPR22-B, EN55011-B, EN55022-B | | | | |
| | HARMONIC ATTENUATOR | Complies with IEC61000-3-2 *6 | | | | |
| OTHERS | CASE SIZE/WEIGHT | 34 X 93 X 168mm [1.34 X 3.66 X 6.61 inches] (W X H X D) / 560g max (with cover : 625g max) | | | | |
| | COOLING METHOD | Convection | | | | |

*1 Measured by 20MHz oscilloscope or Ripple-Noise meter (equivalent to KEISOKU-GIKEN: RM101).

*2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C.

*3 Applicable when Remote ON/OFF (optional) is added. RC is insulated with input, output and FG.

*4 Derating is required.

*5 Please contact us about safety approvals for the model with option.


*6 Please contact us about class C.

* Parallel operation with other model is not possible.

* Derating is required when operated with cover.


* A sound may occur from power supply at peak loading.

Block diagram

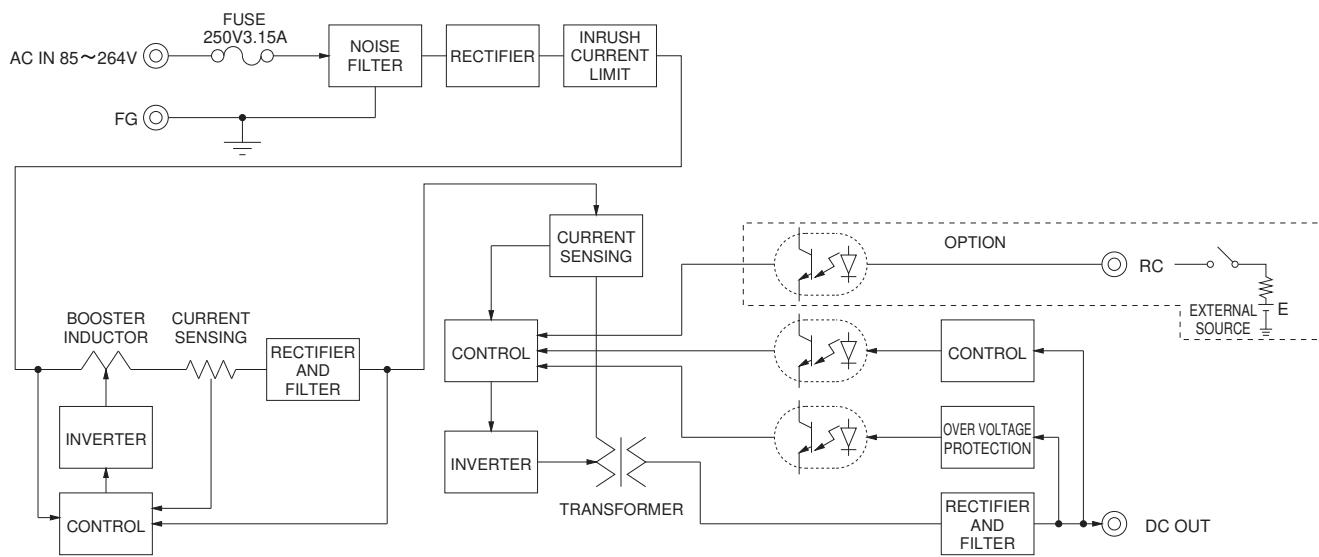

External view

※ External size of option T,T1,R and N is different from standard model and refer to 4 Option of instruction manual for details.

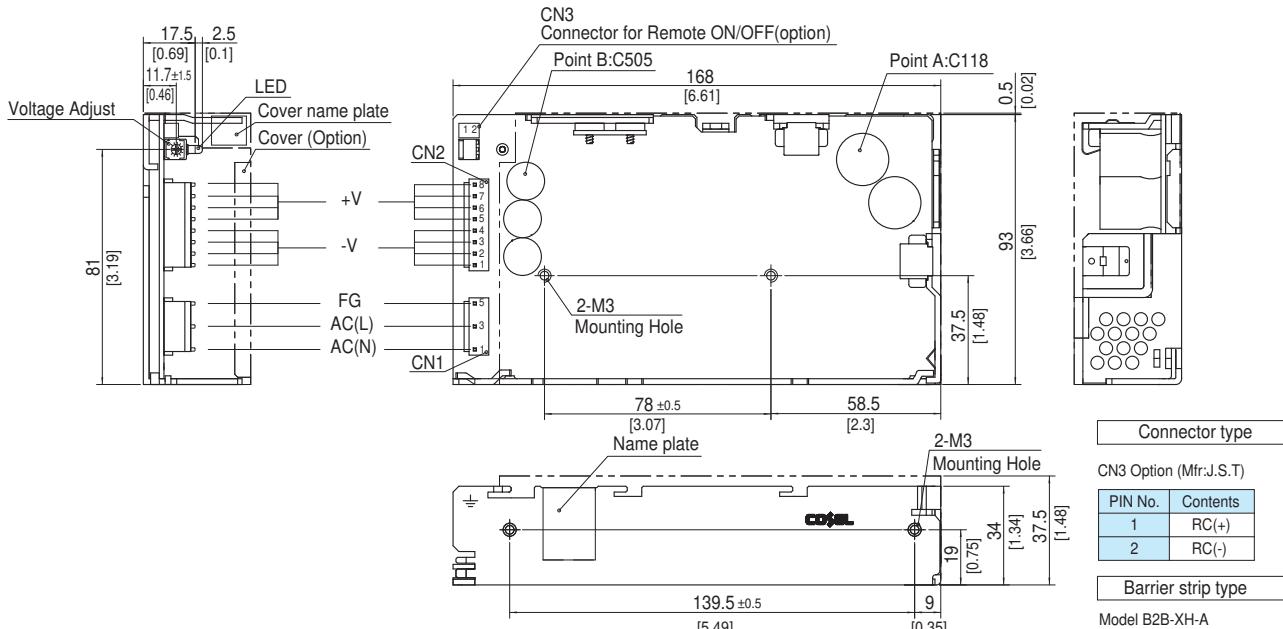

※ Point A,Point B are thermometry points. Please refer to Instruction Manual 3.

| I/O Connector | Mating Connector | Terminal |
|-----------------|------------------|------------------------------------|
| CN1 1-1123724-3 | 1-1123722-5 | Chain 1123721-1 Loose 1318912-1 |
| CN2 1-1123723-8 | 1-1123722-8 | Chain 1123721-1 Loose 1318912-1 |

(Mfr : Tyco Electronics AMP)

※ I/O Connector is Mfr.Tyco Electronics AMP

※ Option : -J1 : (J.S.T) connector type

-T : Vertical terminal block type

-T1 : Horizontal terminal block type

Refer to Instruction Manual 4.

<PIN CONNECTION>

CN1

| Pin No. | Input |
|---------|-------|
| 1 | AC(N) |
| 2 | |
| 3 | AC(L) |
| 4 | |
| 5 | FG |

CN2

| Pin No. | Output |
|---------|--------|
| 1 - 4 | -V |
| 5 - 8 | +V |

※ Tolerance : ± 1 [± 0.04]

※ Weight : 560g max (with cover : 625g max)

※ PCB Material/thickness : CEM-3 / 1.6mm [0.06inches]

※ Chassis material : Aluminum

※ Keep drawing current per pin below 5A of CN2.

※ Dimensions in mm, []=inches

※ Mounting torque : 0.49N · m (5kgf · cm) max

※ Please connect safety ground to the unit in 2-M3 holes.