



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



**KEMET Part Number: PMR209MC6220M220R30**  
(P409CP224M250AH221)

PMR209/P409, Film, Metallized Paper, Resistor/Capacitor, 0.22 uF, 20%, 630 VDC, 85C, Lead Spacing = 20.3mm

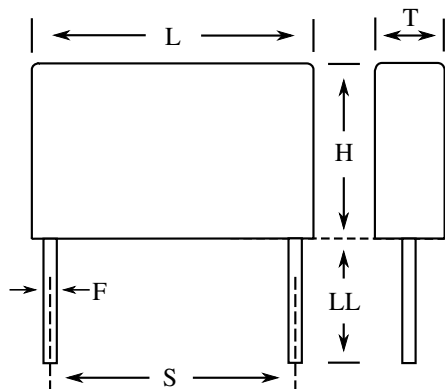

**Dimensions**

L	24mm MAX
H	16.5mm MAX
T	11.3mm MAX
S	20.3mm +/-0.4mm
LL	30mm +5mm
F	0.8mm +/-0.05mm

**Packaging Specifications**

Packaging:	Bulk, Bag
Packaging Quantity:	150

**General Information**

Supplier:	KEMET
Series:	PMR209/P409
Dielectric:	Metallized Paper
Style:	Radial
Features:	RC Unit approved
RoHS:	Yes
Lead:	Wire Leads
Qualifications:	ENEC, UL, cUL
AEC-Q200:	No
Construction:	Molded
Miscellaneous:	Resistor= 220 Ohms
Notes:	Not For New Design, Please Use The New P409 Series @ 275 VAC

**Specifications**

Capacitance:	0.22 uF
Capacitance Tolerance:	20%
Voltage AC:	250 VAC
Voltage DC:	630 VDC
Temperature Range:	-40/+85C
Rated Temperature:	85C
Insulation Resistance:	3 GOhms
Safety Class:	X2