



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# .230" PANEL MOUNT REFLECTOR

## T-1, Water-Tight Optional

- Reflective Chrome-Plated Body - Mounting Hardware Provided - Maximum Panel Thickness .125"(PMRL125); .070"(PMRL125, Water-Tight)  
 - For Detailed LED Data, See Discrete Section, MODEL 125

<b>1</b>	<b>Model</b>	<b>Wires</b>
	PMRL125	W (optional)

### TO ORDER, FOLLOW THE EXAMPLE:

Select one **BOLD** component from each numbered category in the tables below.

<b>1</b>	<b>Model</b>	<b>Wire</b>	<b>2</b>	<b>LED</b>	<b>3</b>	<b>Voltage</b>	<b>4</b>	<b>Water Tight</b>
	PMRL125	W		-BCG		12H		

→Part Number **PMRL125W-BCG12H**

STANDARD INTENSITY - DIFFUSED ENCAPSULATION						
<b>2</b>	<b>LED</b>	<b>Color</b>	$\lambda_{pk}$ (nm)	$I_v^{[1]}$ (mcd)	Viewing Angle	V/C Table <sup>[2]</sup>
	-BR	RED	635	14	60	I
	-BA	AMB	583	14	60	I
	-BG	GRN	565	14	60	I

MEDIUM INTENSITY - TINTED ENCAPSULATION						
<b>2</b>	<b>LED</b>	<b>Color</b>	$\lambda_{pk}$ (nm)	$I_v^{[1]}$ (mcd)	Viewing Angle	V/C Table <sup>[2]</sup>
	-BCR	RED	635	60	45	I
	-BCA	AMB	583	30	45	I
	-BCG	GRN	565	44	45	I

HIGH INTENSITY - WATERCLEAR ENCAPSULATION						
<b>2</b>	<b>LED</b>	<b>Color</b>	$\lambda_{pk}$ (nm)	$I_v^{[1]}$ (mcd)	Viewing Angle	V/C Table <sup>[2]</sup>
	-NWR	RED	634	2180	35	I
	-NWA	AMB	592	2180	35	I
	-NWG	GRN	520	2000	45	II
	-NWB	BLU	465	600	45	II
	-NWW	WHT	1100	1100	55	II

Voltage/Current	
Design Vf/If	Max Vf/If
<b>V/C Table I</b>	
5V/22mA	5.5V/28mA
12V/20mA	14V/25mA
15V/24mA	16.5V/28mA
24V/17mA	26V/20mA
28V/16.5mA	30V/18mA
48V/15mA	50V/16mA
60V/9mA	65V/10mA
120VAC/3.5mA	130VAC/4mA

Voltage/Current	
Design Vf/If	Max Vf/If
<b>V/C Table II</b>	
5V/15mA	5.5V/23mA
12V/15mA	14V/20mA
15V/15mA	16.5V/18mA
24V/15mA	26V/18mA
28V/15mA	30V/17mA
48V/9.5mA	50V/10mA
60V/7mA	65V/8mA
120VAC/3.5mA	130VAC/4mA

<b>3</b>	<b>Voltage<sup>[3]</sup></b>
	2
	5H
	12H
	15H
	24H
	28H
	48H
	60H
	120 <sup>[4]</sup>

<b>4</b>	<b>Water Tight<sup>[5]</sup></b>
	-WT (optional)

SPECIALTY LEDs - DIFFUSED ENCAPSULATION							
<b>2</b>	<b>LED</b>	<b>Color</b>	$\lambda_{pk}$ (nm)	$I_v^{[1]}$ (mcd)	Viewing Angle	V/C Table <sup>[2]</sup>	Description
	-RLP <sup>[6]</sup>	RED	635	2.1	50	[2]	Low Power
	-ALP <sup>[6]</sup>	AMB	583	1.6	50	[2]	Low Power
	-GLP <sup>[6]</sup>	GRN	565	2.1	50	[2]	Low Power
	-RG	RED/GRN	630/565	5.0/5.0	72	I	Bi-Color, Red Cathode

[1]  $I_v$  = typical luminous intensity @  $I_f = 20mA (T_a = 25^\circ C)$ . For Low Power LEDs,  $I_f = 2mA$ .

[2] See Voltage/Current table for design specifications. Design current for low power LEDs = 2mA.

[3]  $T_a = 25^\circ C$ . Voltage "2" indicates external resistor required. Voltages 5H through 60H are VDC. For AC operation, insert D after Voltage (e.g. 24HD). D indicates built-in rectifier, not required for 5H or 120VAC. DC operation not available for 120VAC. Bi-Color not available in AC voltages.


[4] Select high intensity LEDs only.

[5] Drip-proof (not submersible), supplied with two neoprene gaskets.

[6] Omit H when selecting a voltage (e.g. PMRL125-RLP12).



## PMRL125

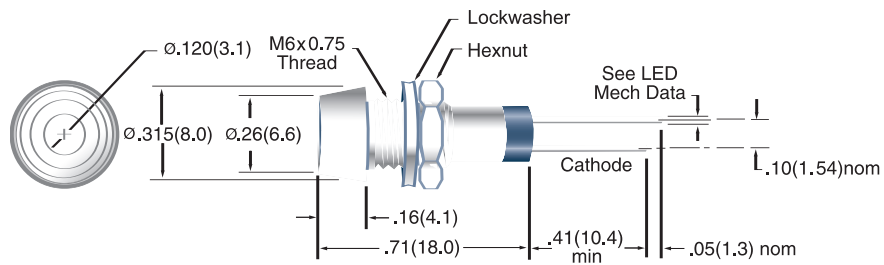

### Standard Wire Leads:

6.0" total length(nominal)/.50" stripped (nominal), red anode/black cathode, 24 AWG TPB UL1061 insulation. Contact factory for other lengths, gauges and colors.

### All dimensions are in inches (mm)

Tolerances: .xx"(.x) ±.025"(.63) / .xxx"(.xx)±.010"(.25)  
Specifications are subject to change without notice.