

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








PANDUIT	STUD	DIMENSIONS in.						
PART NUMBER	SIZE	A *.03	W *.01	C ±.02	M ±.03	H *•01		
PN10-6RX	#6	l.13 (28.70)	.37 (9.40)	.33 (8.38)	.94 (23.88)	.15 (3.81)		
PN10-8RX	#8	1.13 (28.70)	.37 (9.40)	.33 (8.38)	.94 (23.88)	.17 (4.32)		
PN10-10RX	#10	1.13 (28.70)	.37 (9.40)	.33 (8.38)	.94 (23.88)	.20 (5.08)		
PN10-14RX	1/4"	1.27 (32.26)	.52 (13.21)	.42 (10.69)	1.01 (25.65)	.27 (6.86)		
PN10-56RX	5/16"	1.27 (32.26)	.52 (13.21)	.42 (10.69)	1.01 (25.65)	.34 (8.64)		
PN10-38RX	3/8"	1.35 (34.29)	.58 (14.73)	.46 (11.68)	1.06 (26.92)	.40 (10.16)		

NOTES:

- 1. UL LISTED AND CSA CERTIFIED FOR:
 - A. 600V. MAX. BLDG WIRE
 (1000 V. MAX IN SIGNS, FIXTURES & LUMINAIRES),
 - B. #14-10 AWG SOLID OR STRANDED COPPER WIRE WITH THE CT-550 INSTALLATION TOOL.
 - C. #12-10 AWG SOLID OR STRANDED COPPER WIRE WITH THE CT-100 INSTALLATION TOOL.
 - D. #12 AWG SOLID OR STRANDED, AND #10 AWG STRANDED COPPER WIRE WITH THE CT-1550 AND CT-1551 INSTALLATION TOOLS.
 - E. 221°F (105°C) MAX TEMP. RATING
- 2. MATERIAL:
 - A. STAMPING .04" (1.02) THK COPPER, TIN PLATED
 - B. HOUSING NYLON, YELLOW
 - C. SLEEVE BRASS, TIN PLATED
- 3. STRIP LENGTH 9/32 +1/32
- 4. SEE www.panduit.com FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE.
- 5. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS



LISTED 587H E52164

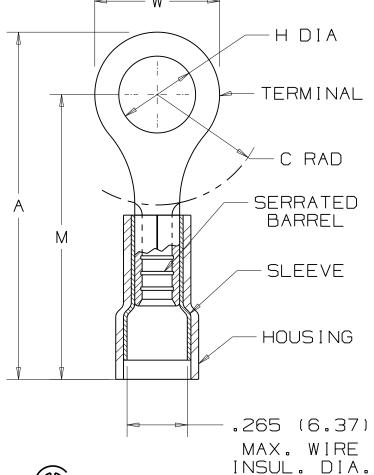



CERTIFIED LR31212

								CORP. TINLEY PARK, ILLINOIS			
										TINLEY PARK, ILLINOIS	
								#12-10 BARREL NYLON INSULATED RING TONGUE, .265 (6.37) MAX. WIRE INSULATION DIAMETER			
07	5/11	SB		UPDATED NOTE#4							
REV	DATE	BY	СНК	DESCRIPTION	ECN #	CUST	РМ	DRAWN BY	CJH	NONE	DRAWING NO. A41273