



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Single Port PoE Gigabit Switch Powered by IEEE802.3at Extends Ethernet Data and PoE to 200 Meters

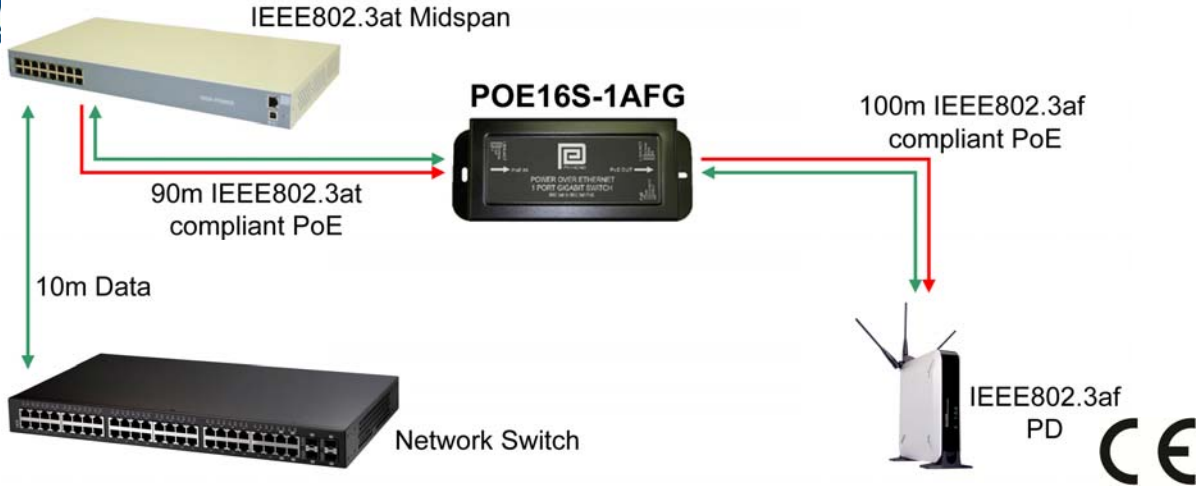

Features

- IEEE802.3af Class 4
- 0-55C Operating Temperature Range
- Gigabit Compatible
- Extends Ethernet to 200 meters
- Powered by IEEE802.3at with Layer 1
- Detects 25K signature resistance
- Boost Circuit to Compensate for Wire Drops
- 1 Year Warranty

Applications

- IP Cameras
- Access Controls
- Wireless Access Points

Safety Approvals

- CE

Mechanical Characteristics

- Length: 120mm (4.72in)
- Width: 60mm (2.36in)
- Height: 32mm (1.26in)
- Weight: 0.6Kg (1.3lb)

Output Specifications

Model	DC Output Voltage			Output Current		Output Power
	Min.	Typ.	Max.	Min.	Max.	
POE16S-1AFG	54V	56V	57V	10mA	330mA	19W

Phihong is not responsible for any error, and reserves the right to make changes without notice. Please visit our website at www.phihong.com for the most up-to-date specifications and contact information.

INPUT:

Input Source

Receives power from IEEE802.3at Midspan

Input Detection

25K Detection IEEE802.3at compliance

DC Input Voltage Range

45VDC to 57VDC

DC Input Current

1.0A at 45VDC and maximum load

2.0A at 50VDC and maximum load

0.8A at 57VDC and maximum load

OUTPUT:

Total Output Power

19W with 33.6W PoE Input

Ripple and Noise (Vp-p)

250mV maximum

Output Detection

25K Detection IEEE802.3af compliance

Efficiency

75% minimum at maximum load

ENVIRONMENTAL

Operating Temperature 0 to 40°C
(gigabit data rates)

Operating Temperature 0 to 55°C
(10Mb and 100Mb data rates)

Storage Temperature -25 to +65°C

Humidity 5 to 90%

EMI

EN55022 Class A, FCC part 15 Class A

Warranty

1 Year

Immunity

ESD EN61000-4-2 Level 3

RS EN61000-4-3 Level 3

Surge EN61000-4-5 Level 2

Isolation (HI-POT)

2121VDC for 1 min, 10mA

Insulation Resistance

Input to Ground: >10M OHM 500VDC

Output to Ground: >10M OHM 500VDC

FEATURES

Over Current Protection

For PoE Class 0-3 Detection on Output: 450mA maximum

For PoE Class 4 Detection on Output: 650mA maximum

Short Circuit Protection

Outputs equipped with short circuit protection
The output can be shorted permanently without damage

Indicators

Ethernet – Green LED1 and LED2 -
IN/OUT 10Mb Activity

Green LED1 – 100Mb Activity

Green LED2 – 1Gb Activity

Orange LED3 – Link Activity

POE Blinking GREEN – Unit is ON
Active with No Load

Solid GREEN – Unit has
detected a valid
IEEE802.3af load

Blinking RED/GREEN – unit
has detected an invalid load

Solid RED – unit is in over-load
condition

Input/Output Connectors

RJ45

Input Connection

Pins: 1,2 7,8 GND / Pins: 3,6 4,5 +VIN

Output Connection

Pins: 1,2 GND / Pins: 3,6 +VIN

