



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



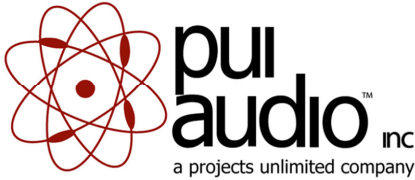

New Product Feature

Microphones with 100mm Leads

PUI Audio, Inc.'s new line of microphones with 100mm leads help to make product prototyping, PCB design and layout, and assembly tremendously faster than ever before.

Additionally, with polarity indicated by color on the halogen-free UL3302 32 AWG wire, accidental reverse polarity connections are virtually eliminated.

This line of nine microphones is based upon PUI Audio Inc.'s most popular models (in three sizes) that previously were only offered with solder pads.

4mm Diameter Microphone


- The diminutive **TOM-1545L-LW100-R** features a 4mm overall diameter and is only 1.5mm thick.

6mm Diameter Microphones

- A 33 pF capacitor is built into both the **POM-2244L-C33-R** and **POM-2246L-C33-LW100-R** for superior sound quality and maximum noise rejection.
- Great sensitivity ratings make the **POM-2738L-LW100-R** and **POM-3535L-3-LW100-R** natural choices for capturing low level sounds.
- The IP57 waterproof **POW-1644L-B-LW100-R** features a rubber boot that seals off the electrical connections from moisture and also serves as mechanical isolation to filter out vibrations.

9mm Diameter Microphones

- Sensitivity and a wide, flat frequency response are the hallmarks of the **AOM-6738L-R**.
- Bidirectional front and rear audio inputs on the noise canceling **ANM-5254L-LW100-R** allow for ambient noise to be naturally filtered out from the desired sound without the need for complicated electronics.
- The unidirectional **AUM-5047L-3-LW100-R** has a cardioid polar pattern for capturing sound in only one specific direction.

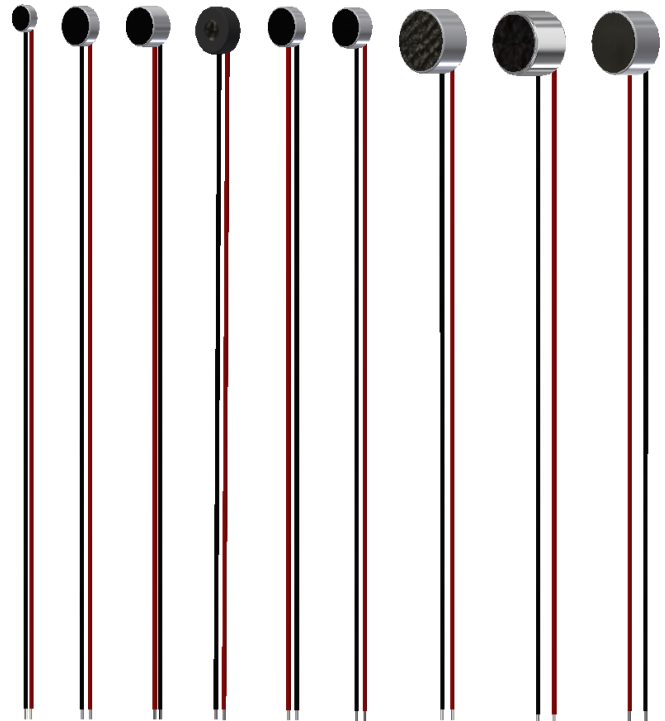

Applications

Conference Phones

Automotive Voice Commands

Interactive Kiosks

Air Pressure Differential Sensor

Professional Boom Microphone

Noise Canceling Systems

Consumer Audio

Measurement Microphones

Lavalier/Lapel Microphones

Smartphone Docking Stations