



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us



Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com



Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



REV.	ECN NO.	DATE
1.0	RELEASED	05/25/01
2.0	REVISED P/N	03/04/04
3.0	UPDATE TOL.	12/16/04

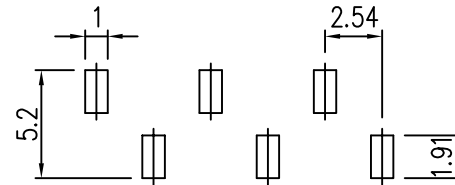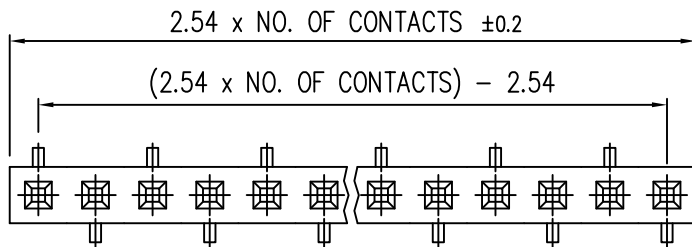

P.C.B LAYOUT

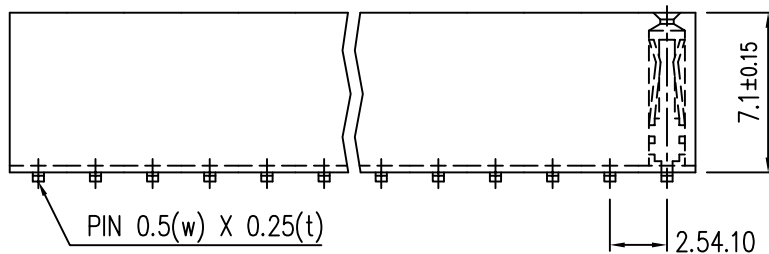

**SPECIFICATIONS**

- CURRENT RATING : 3 AMPS
- INSULATOR RESISTANCE : 5000 MEGOHMS MIN.
- CONTACT RESISTANCE : 20 MILLIOHMS MAX.
- DIELECTRIC WITHSTANDING : AC 500V
- MAX PROCESSING TEMP : 230°C FOR 30 ~ 60 SECONDS  
(260°C FOR 10 SECONDS)
- OPERATING TEMPERATURE : -40°C ~ +125°C
- CONTACT MATERIAL : PHOSPHOR BRONZE.
- INSULATOR MATERIAL : NYLON, UL 94V-0
- \*CONTACT PLATING: P=OVERALL GOLD FLASH; T=OVERALL TIN

**ORDERING INFORMATION:**

1. Replace "\*" with plating code
2. Replace "xx" with number of positions (Pins)

SCALE	3:1	DRAW	JFW	Sullins Electronics	
UNIT	MM	CHECK	AJT	San Marcos, CA Tel: 760 744-0125 www.SullinsElectronics.com	
TOLERANCE		AP"E		NAME: FEMALE HEADER, 2.54mm SPACING 7.1mm PROFILE, SMT	
.0= $\pm 0.35$ .00= $\pm 0.2$ ANG= $\pm 5^\circ$		PROJECTION		(PART NO)	PP_Cxx1KFXC
				(DRAW NO)	7012