



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us





Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



REV.	ECN NO.	DATE
A	RELEASED	09/02/03
B	REVISED P/N	03/04/04
C	UPDATE TOL	12/16/04

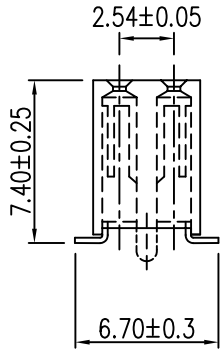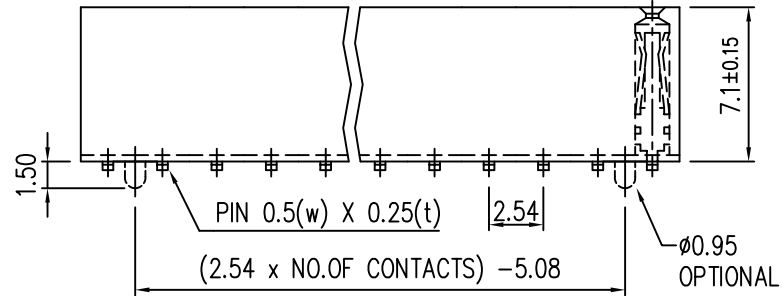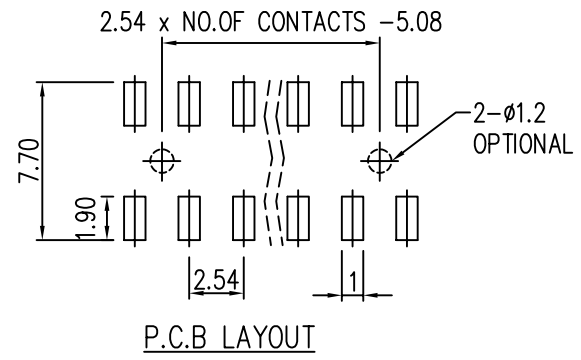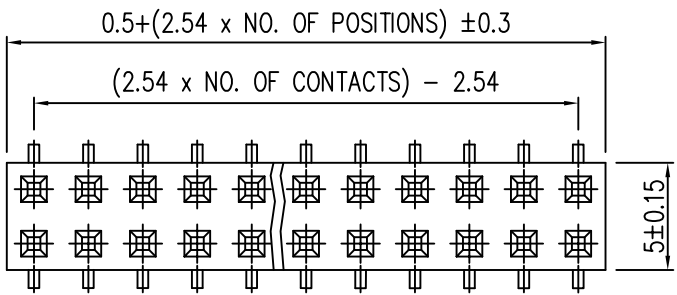

SPECIFICATIONS

CURRENT RATING : 3 AMPS
 INSULATOR RESISTANCE : 5000 MEGOHMS MIN.
 CONTACT RESISTANCE : 20 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING : AC 500V
 MAX PROCESSING TEMP : 230°C FOR 30 ~ 60 SECONDS
 (260°C FOR 10 SECONDS)
 OPERATING TEMPERATURE : -40°C ~ +125°C
 CONTACT MATERIAL : PHOSPHOR BRONZE.
 INSULATOR MATERIAL: NYLON 6T, UL 94V-0
 *CONTACT PLATING: P=OVERALL GOLD FLASH; T=OVERALL TIN PLATED

ORDERING INFORMATION:

1. Replace "*" with plating code
2. Replace "xx" with number of positions (note that for this dual row connector, the number of positions is 1/2 the number of total contacts)
3. To add guide post feature, replace 1st letter "S" of the part number with "P"

SCALE	NTS	DRAW	JFW	Sullins Electronics	
UNIT	MM	CHECK	AJT	San Marcos, CA Tel: 760 744-0125 www.SullinsElectronics.com	
TOLERANCE		AP"E		NAME: FEMALE HEADER, 2.54mm SPACING 7.1mm PROFILE, SMT	
.0±±0.35 .00±±0.2 ANG=±5°		PROJECTION		PART NO	PP_Cxx2KFMS
				DRAW NO	7011