



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Limit Switches - Limit Type Metal Body IP66



- High mechanical resistance
- Degree of protection IP66
- Zinc alloy (Zamack) body
- Positive Opening Operation (↻)
- Minimum Actuation Force/Torque
- Minimum Force to achieve Positive Opening Operation
- Precise operating points (consistency)
- Immune to electromagnetic disturbances
- Zb type contact blocks
- Current Ith = 10A
- Rated insulation voltage Ui = 500V
- UL, CSA, CE
- Conform with IEC 947-5-1 (EN 60947-5-1)


Product Description

They are developed in order to be used for following operations:

- Presence/Absence
- Positioning and travel limit
- Objects passing/counting

Ordering Key

PS31 L-PS11 RT-M00

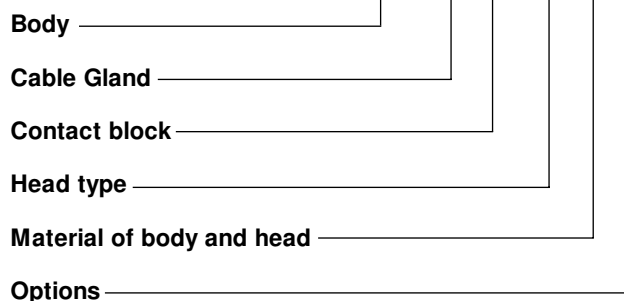

Description of the key codes

Body

PS31L | PS 40mm (fix 30mm) 1 cable inlet for General Purpose

Cable Gland

M | M20
P | PG13.5
N | 1/2 NPT

Contact block

O11 | 1NO+1NC overlap slow(+)
S02 | 2NC snap(+)
S11 | 1NO+1NC snap(+)
T02 | 2NC slow(+)
T03 | 3NC slow(+)
T11 | 1NO+1NC slow(+)
T12 | 1NO+2NC slow(+)
T20 | 2NO slow
T21 | 2NO+1NC slow(+)
T30 | 3NO slow

Material of body and head

M | Metal Body and Metal head

Options

00 | no option

Head type

L3 | adj square (3x3) steel rod LEVER
LA | adj Ø3 rod LEVER stainless steel rod
LB | nylon actuator with stainless steel spring
LF | adj fiberglass rod LEVER Ø3
LG | adj fiberglass rod LEVER Ø6
LN | adj nylon rod LEVER
LP | multidir nylon actuator with stainless steel spring
LS | stainless steel spring multidir actuator
LW | Stainless steel spring multidir actuator (cat Whisker)
LZ | Stainless steel spring actuator
N6 | pull wire for simple stop
P0 | metal plain PLUNGER
PB | steel ball PLUNGER
PR | metal roller PLUNGER
R1 | adj LEVER with nylon roller
R2 | adj LEVER with stainless steel roller
R3 | adj LEVER with steel ball bearing
RB | one way LEVER steel ball bearing
RH | plastic roller LEVER on metal PLUNGER (left)
RK | one way LEVER stainless steel roller
RO | roller LEVER steel ball bearing
RS | metal roller LEVER
RT | nylon roller LEVER
SH | stainless steel lateral PLUNGER with horizontal roller
SP | stainless steel lateral plain PLUNGER
SV | stainless steel lateral PLUNGER with vertical roller
W0 | Ø50 rubber roller LEVER
W1 | adj LEVER with Ø50 rubber roller

Technical Data

Standards

Certifications – Approvals

Air temperature near the device

- during operation °C
- for storage °C

Climatic withstand

Mounting positions

Shock withstand (according to IEC 68-2-27 and 60068-2-27) g
(1/2sinusoidal shock for 11 ms) no change in contact position

Resistance to vibrations (acc.to IEC 68-2-6 and EN 60068-2-6) g

Protection against electrical shocks (acc.to IEC 536)

Degree of protection (according to IEC 529 and EN 60529)

Consistency (measured over 1 million operations)

IEC 60947-1, IEC 60947-5-1, EN 60947-1, EN 60947-5-1,
UL508 and CSA C22-2 n°14
UL – CSA

-25 ... +70

-30 ... +80

According to IEC 68-2-3 and salty mist according to IEC 68-2-11

All positions are authorized

50g*

25g (10...500Hz) no change in position of contacts greater than 100µs

Class I

IP66

0.1 mm (upon closing point)

* except for PS21/PS42 with head type W0, W1: 25g.

Electrical Data

Rated insulation voltage U_i

-according to IEC 60947-1 and EN 60947-1

-according to UL 508, CSA C22-2 n°14

Rated impulse withstand voltage U_{imp} kV

(according to IEC 60947-1 and EN 60947-1)

Conventional enclosed thermal current I_{the} A

(according to IEC 60947-5-1 and EN 60947-5-1) ($\theta \leq 40^\circ\text{C}$)

Short-circuit protection - gG type fuses A

Rated operational current

I_e / **AC-15** - acc.to IEC 60947-5-1

24Vac (50/60 Hz) A

130Vac (50/60 Hz) A

230Vac (50/60 Hz) A

240Vac (50/60 Hz) A

400Vac (50/60 Hz) A

- acc.to UL 508, CSA C22 n°14

I_e / **DC-13** - acc.to IEC 60947-5-1

24Vdc A

110Vdc A

250Vdc A

- acc.to UL 508, CSA C22 n°14

Electrical durability

(according to IEC 60497-5-1 annex C)

- max. switching frequency Cycles/h

- load factor

Connecting data of contact blocks

Connecting terminals

Connecting capacity 1 or 2 x mm² / AWG

Terminal marking

Positivity

Diagram for snap action contact:





Diagram for slow action contact:



400V (PS21, PS42), 500V (PS31, PS43) (degree of pollution 3)

A 300 Q 300 (PS21, PS42), A 600 Q 600 (PS31, PS43)

6

10

10

10

5.5

3.1

3

1.8

A 300 (PS21, PS42), A 600 (PS31, PS43)

2.8

0.6

0,27

Q 300 (PS21, PS42), Q 600 (PS31, PS43)

Utilization categories AC-15 and DC-13 (see curves and value below)

3600

0,5

M3,5 (+,-) pozidriv 2 screw with cable clamp

0,5mm² / AWG 20 to 2,5mm² / AWG 14

According to EN 50013

Contacts with positive opening operation as per IEC 60947-5-1 chapter 3

Electrical durability for DC-13 utilization category


Power breaking for a durability of 5 million operating cycles		
	Snap action	Slow action
Voltage 24V	9,5W	12W
Voltage 48V	6,8W	9W
Voltage 110V	3,6W	6W

Limit Switches - Limit Type (PS31) Metal Body IP66




▣ Cable Gland

- P** = one cable inlet PG13.5 cable gland
- M** = one cable inlet M20x1.5 cable gland
- N** = one cable inlet 1/2" NPT cable gland

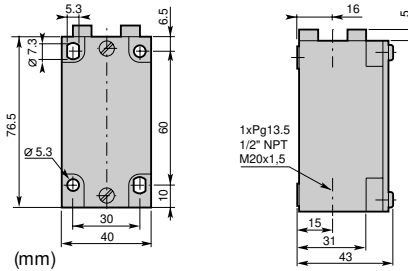


▲ Contact block (Zb type)


S11 (1NO+1NC) Snap action		T11 (1NO+1NC) Non overlapping Slow action		O11 (1NO+1NC) Overlapping Slow action		T02 (2NC) Slow Action		T20 (2NO) Slow action	
S02 (2NC) Snap action		T12 (1NO+2NC) Non overlapping Slow action		T21 (2NO+1NC) Non overlapping Slow action		T03 (3NC) Simultaneous Slow action		T30 (3NO) Simultaneous Slow action	

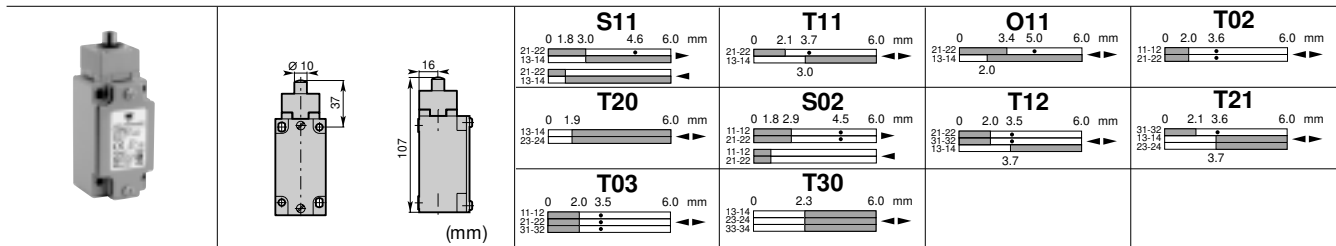


Conformity / (NC) EN 50041 / (NC) **Stainless steel plain plunger**
Max. Actuation speed 0.5ms **Code** PS31L-▣▲P0-M00
Min. force or torque 30N / 45Nm
Weight 240g

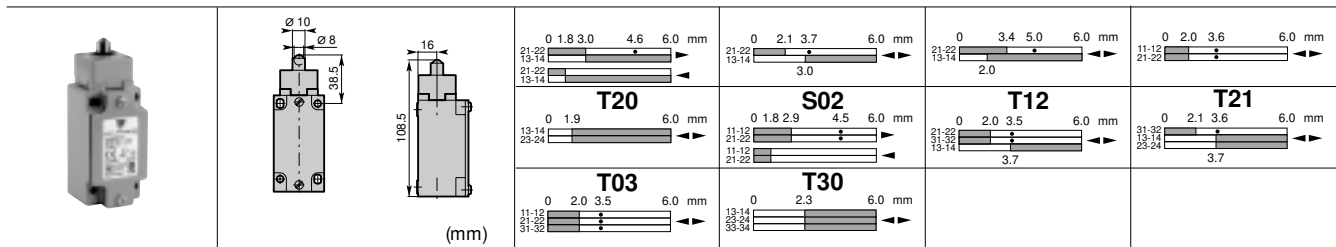


Conformity / (NC) EN 50041 / (NC) **Stainless steel ball plunger**
Max. Actuation speed 0.5ms **Code** PS31L-▣▲PB-M00
Min. force or torque 30N / 45Nm
Weight 240g

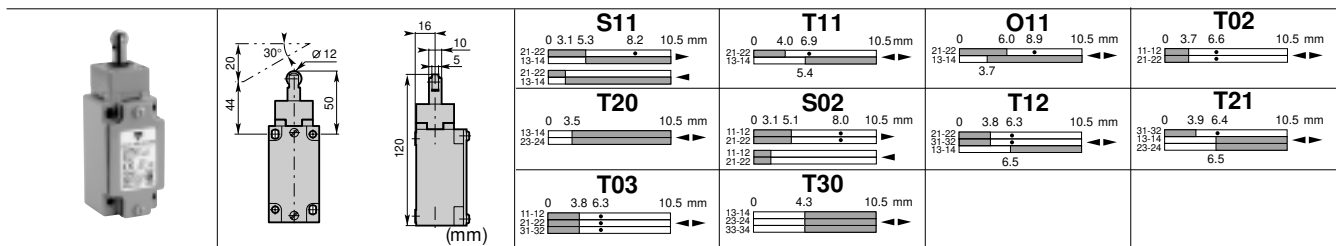

Conformity / (NC) EN 50041 / (NC) **Stainless steel Ø22 roller plunger**
Max. Actuation speed 0.5ms **Code** PS31L-▣▲PR-M00
Min. force or torque 22N / 40Nm
Weight 245g

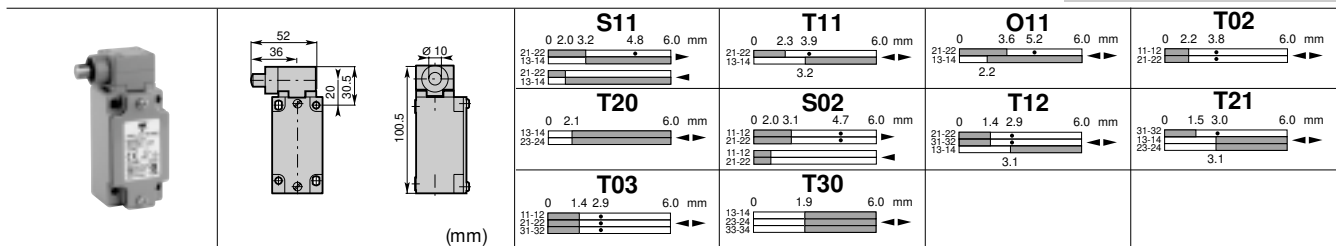


Conformity / (NC) EN 50041 / (NC) **Stainless steel lateral plunger**
Max. Actuation speed 0.5ms **Code** PS31L-▣▲SP-M00
Min. force or torque 30N / 50Nm
Weight 260g

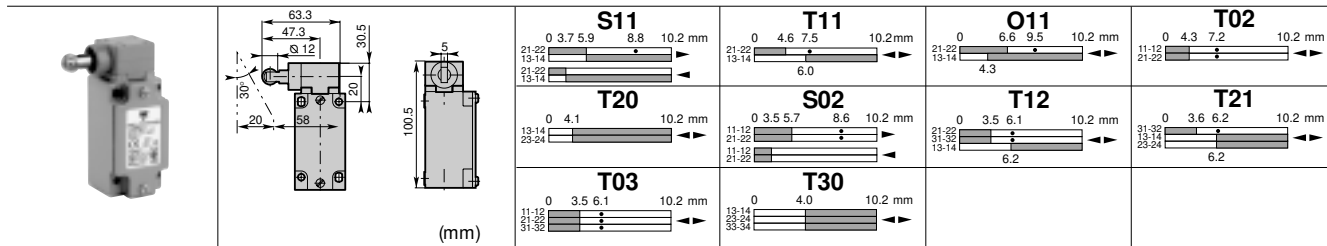


Conformity / (NC) EN 50041 / (NC)
 Max. Actuation speed 0.5ms
 Min. force or torque 30N / 50Nm
 Weight 265g

Stainless steel lateral plunger with Ø12 vertical roller
 Code PS31L- [] [] SV-M00

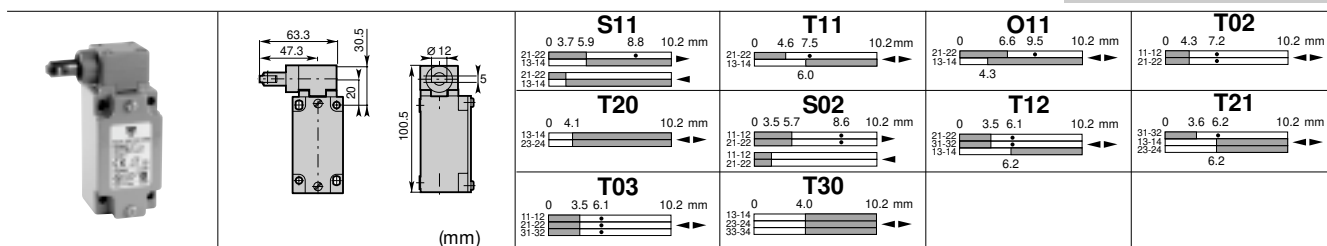

Conformity / (NC) EN 50041 / (NC)
 Max. Actuation speed 0.5ms
 Min. force or torque 30N / 50Nm
 Weight 265g


Stainless steel lateral plunger with Ø12 horizontal roller
 Code PS31L- [] [] SH-M00

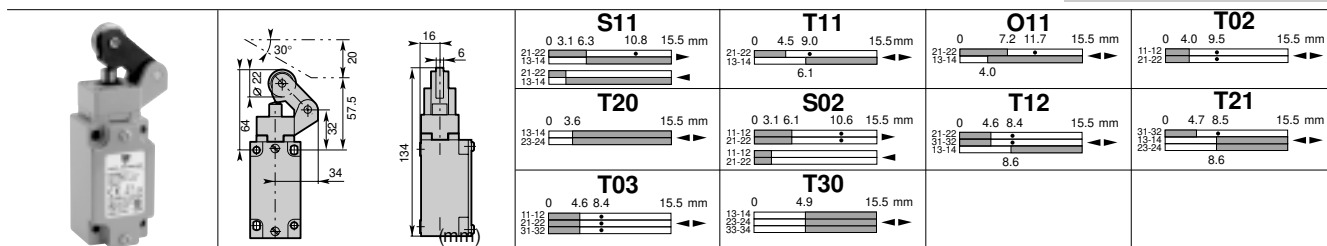

Conformity / (NC) EN 50041 / (NC)
 Max. Actuation speed 1.5ms
 Min. force or torque 12N / 40Nm
 Weight 280g

One way lever
 Code Ø22 nylon roller
 Ø22 stainless steel roller
 Ø22 steel ball bearing


PS31L- [] [] RH-M00
 PS31L- [] [] RK-M00
 PS31L- [] [] RB-M00

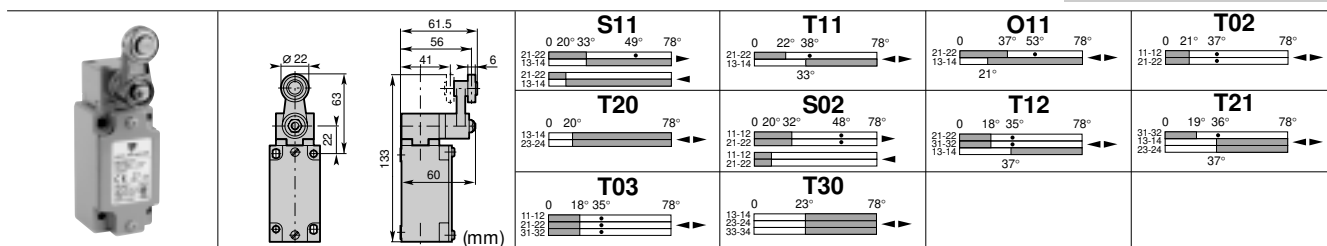

Conformity / (NC) EN 50041 / (NC)
 Max. Actuation speed 1.5ms
 Min. force or torque 0.15N / 0.30Nm
 Weight 300g

Ø22 Roller lever
 Code nylon roller
 stainless steel roller
 steel ball bearing

PS31L- [] [] RT-M00
 PS31L- [] [] RS-M00
 PS31L- [] [] RO-M00

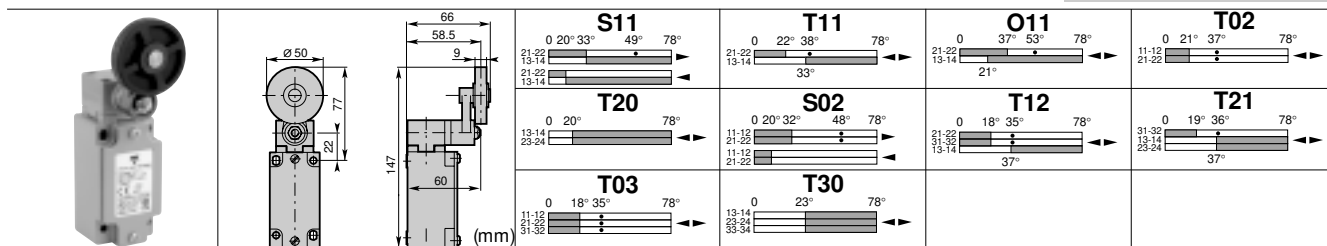

Conformity / (NC) EN 50041 / (NC)
 Max. Actuation speed 1.5ms
 Min. force or torque 0.15N / 0.30Nm
 Weight 315g


Ø50 Rubber roller lever
 Code PS31L- [] [] W0-M00

Limit Switches - Limit Type (PS31) Metal Body IP66




■ Cable Gland

- P** = one cable inlet PG13.5 cable gland
- M** = one cable inlet M20x1.5 cable gland
- N** = one cable inlet 1/2" NPT cable gland

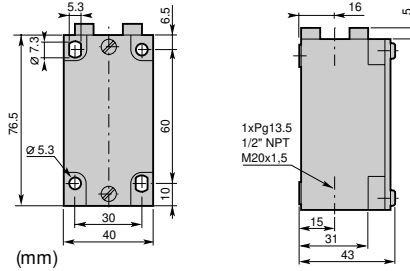

▲ Contact block (Zb type)

S11 (1NO+1NC) Snap action	T11 (1NO+1NC) Non overlapping Slow action	O11 (1NO+1NC) Overlapping Slow action	T02 (2NC) Slow Action	T20 (2NO) Slow action
S02 (2NC) Snap action	T12 (1NO+2NC) Non overlapping Slow action	T21 (2NO+1NC) Non overlapping Slow action	T03 (3NC) Simultaneous Slow action	T30 (3NO) Simultaneous Slow action

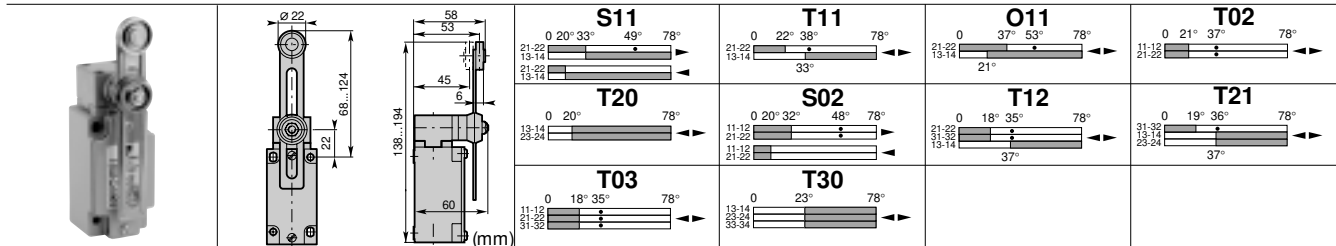


Conformity / (NC)

Max. Actuation speed	1.5ms
Min. force or torque	0.15N / 0.30Nm
Weight	320g

Adjustable Ø22 roller lever

Code	nylon lever stainless steel roller steel ball bearing
------	---

PS31L-	●▲R1-M00
PS31L-	●▲R2-M00
PS31L-	●▲R3-M00

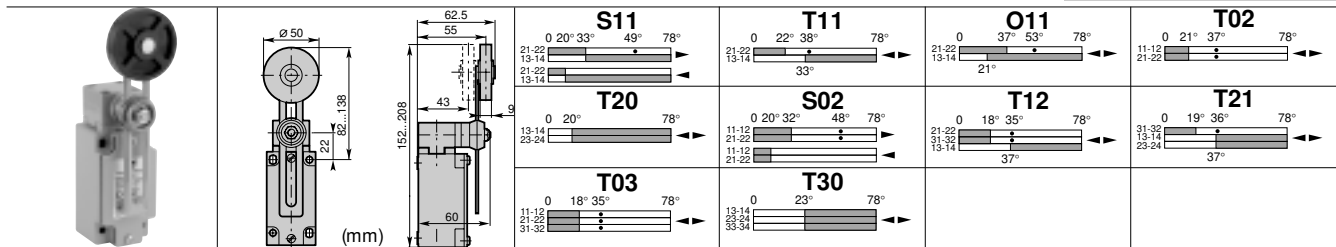


Conformity / (NC)

Max. Actuation speed	1.5ms
Min. force or torque	0.15N / 0.30Nm
Weight	325g

Adjustable Ø50 rubber roller lever

Code

PS31L-	●▲W1-M00
--------	----------

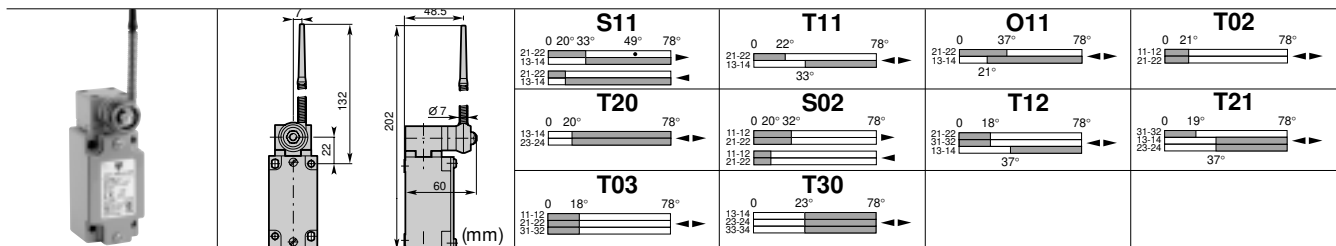


Conformity / (NC)

Max. Actuation speed	1.5ms
Min. force or torque	0.15N / -
Weight	305g

Nylon actuator with stainless steel spring

Code

PS31L-	●▲LB-M00
--------	----------

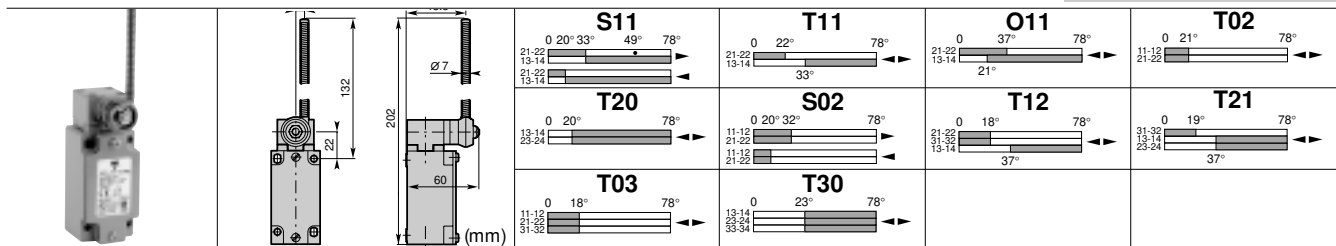


Conformity / (NC)

Max. Actuation speed	1.5ms
Min. force or torque	0.15N / -
Weight	310g

Stainless steel spring actuator

Code

PS31L-	●▲LZ-M00
--------	----------

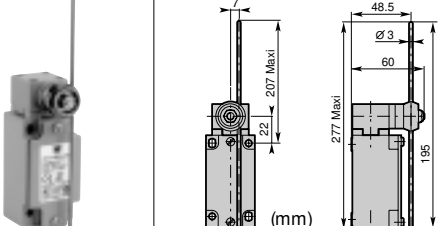

S11 0 20° 33° 49° 78° 21-22 13-14 13-14	T11 0 22° 38° 78° 21-22 13-14 33°	O11 0 37° 53° 78° 21-22 13-14 21°	T02 0 21° 37° 78° 11-12 21-22
T20 0 20° 78° 13-14 23-24	S02 0 20° 32° 48° 78° 11-12 21-22 11-12 21-22	T12 0 18° 35° 78° 21-22 13-14 37°	T21 0 19° 36° 78° 31-32 13-14 23-24 37°
T03 0 18° 35° 78° 11-12 21-22 31-32	T30 0 23° 78° 13-14 33-34 33-34		

Conformity / (NC) EN50041 / (NC)


Max. Actuation speed 1.5ms

Min. force or torque 0.15N / 0.30

Weight 305g

Adjustable rod lever
Code stainless steel rod Ø3
fiberglass rod Ø3

PS31L- LA-M00
PS31L- LF-M00

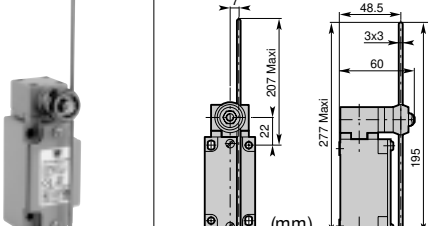

S11 0 20° 33° 49° 78° 21-22 13-14 13-14	T11 0 22° 38° 78° 21-22 13-14 33°	O11 0 37° 53° 78° 21-22 13-14 21°	T02 0 21° 37° 78° 11-12 21-22
T20 0 20° 78° 13-14 23-24	S02 0 20° 32° 48° 78° 11-12 21-22 11-12 21-22	T12 0 18° 35° 78° 21-22 13-14 37°	T21 0 19° 36° 78° 31-32 13-14 23-24 37°
T03 0 18° 35° 78° 11-12 21-22 31-32	T30 0 23° 78° 13-14 33-34 33-34		

Conformity / (NC) EN50041 / (NC)


Max. Actuation speed 1.5ms

Min. force or torque 0.15N / 0.30

Weight 305g

Adjustable rod lever
Code square steel rod 3x3

PS31L- L3-M00

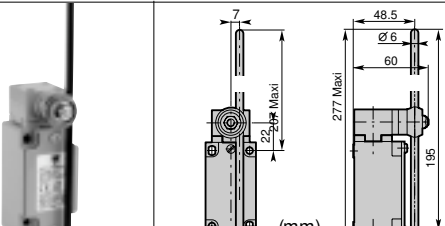

S11 0 20° 33° 49° 78° 21-22 13-14 13-14	T11 0 22° 38° 78° 21-22 13-14 33°	O11 0 37° 53° 78° 21-22 13-14 21°	T02 0 21° 37° 78° 11-12 21-22
T20 0 20° 78° 13-14 23-24	S02 0 20° 32° 48° 78° 11-12 21-22 11-12 21-22	T12 0 18° 35° 78° 21-22 13-14 37°	T21 0 19° 36° 78° 31-32 13-14 23-24 37°
T03 0 18° 35° 78° 11-12 21-22 31-32	T30 0 23° 78° 13-14 33-34 33-34		

Conformity / (NC) EN50041 / (NC)


Max. Actuation speed 1.5ms

Min. force or torque 0.15N / 0.30Nm

Weight 300g

Adjustable rod lever
Code nylon rod
fiberglass rod

PS31L- LN-M00
PS31L- LG-M00

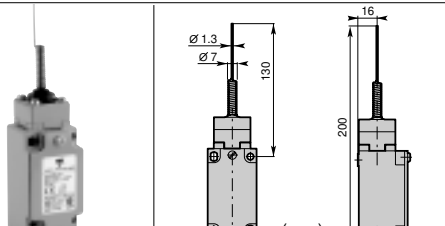

S11 0 9° 21° 21-22 13-14 13-14	T11 0 12° 19° 21-22 13-14	O11 0 23° 11° 21-22 13-14	T02 0 11° 11-12 21-22
T20 0 10° 13-14 23-24	S02 0 9° 20° 11-12 21-22 11-12 21-22	T12 0 12° 27° 21-22 13-14	T21 0 13° 27° 31-32 13-14 23-24
T03 0 12° 11-12 21-22 31-32	T30 0 16° 13-14 33-34 33-34		

Conformity / (NC) /


Max. Actuation speed 1.0ms

Min. force or torque 0.18N / -

Weight 230g

Stainless steel spring multidirectional actuator
Code

PS31L- LW-M00

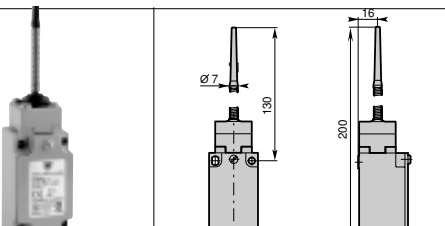

S11 0 9° 21° 21-22 13-14 13-14	T11 0 12° 19° 21-22 13-14	O11 0 23° 11° 21-22 13-14	T02 0 11° 11-12 21-22
T20 0 10° 13-14 23-24	S02 0 9° 20° 11-12 21-22 11-12 21-22	T12 0 12° 27° 21-22 13-14	T21 0 13° 27° 31-32 13-14 23-24
T03 0 12° 11-12 21-22 31-32	T30 0 16° 13-14 33-34 33-34		

Conformity / (NC) /

Max. Actuation speed 1.0ms

Min. force or torque 0.18N / -

Weight 230g

Multidirectional nylon actuator with stainless steel spring
Code


PS31L- LP-M00

Limit Switches - Limit Type (PS31) Metal Body IP66

CARLO GAVAZZI

● Cable Gland

- P** = one cable inlet PG13.5 cable gland
- M** = one cable inlet M20x1.5 cable gland
- N** = one cable inlet 1/2" NPT cable gland

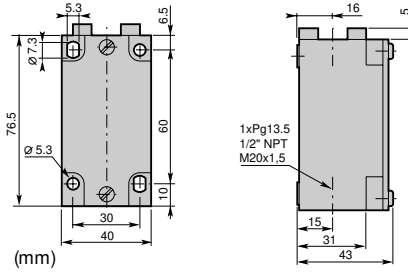

▲ Contact block (Zb type)

S11 (1NO+1NC) Snap action		T11 (1NO+1NC) Non overlapping Slow action		O11 (1NO+1NC) Overlapping Slow action		T02 (2NC) Slow Action		T20 (2NO) Slow action	
S02 (2NC) Snap action		T12 (1NO+2NC) Non overlapping Slow action		T21 (2NO+1NC) Non overlapping Slow action		T03 (3NC) Simultaneous Slow action		T30 (3NO) Simultaneous Slow action	

		S11	T11	O11	T02
		T20	S02	T12	T21
		T03	T30		

Conformity / (NC)

Max. Actuation speed 1.0ms

Min. force or torque 0.18N / -

Weight 235g

Stainless steel spring multidirectional actuator

Code

PS31L-●▲LS-M00

		S11	T11	O11	T02
		T20		T12	T21
		T03	T30		

Conformity / (NC)

Max. Actuation speed 0.5ms

Min. force or torque 25N / -

Weight 245g


Pull action with ring

Code



PS31L-●▲N6-M00

Utilization precautions


Plain plunger

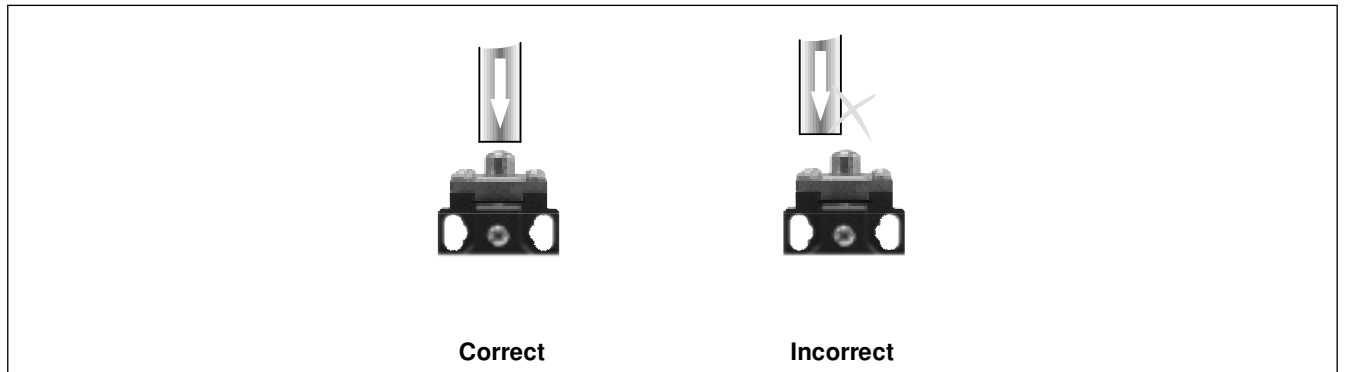

Roller plunger or Roller lever

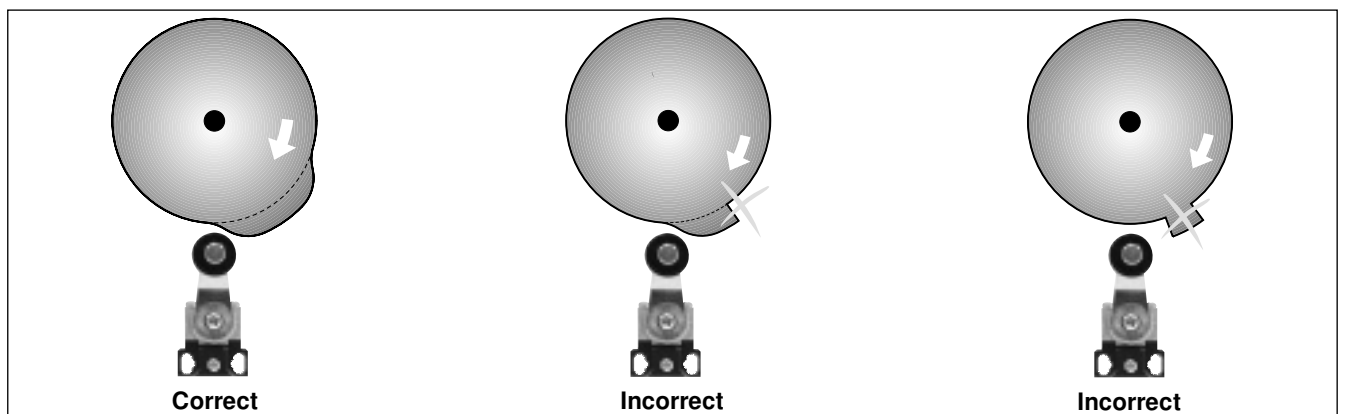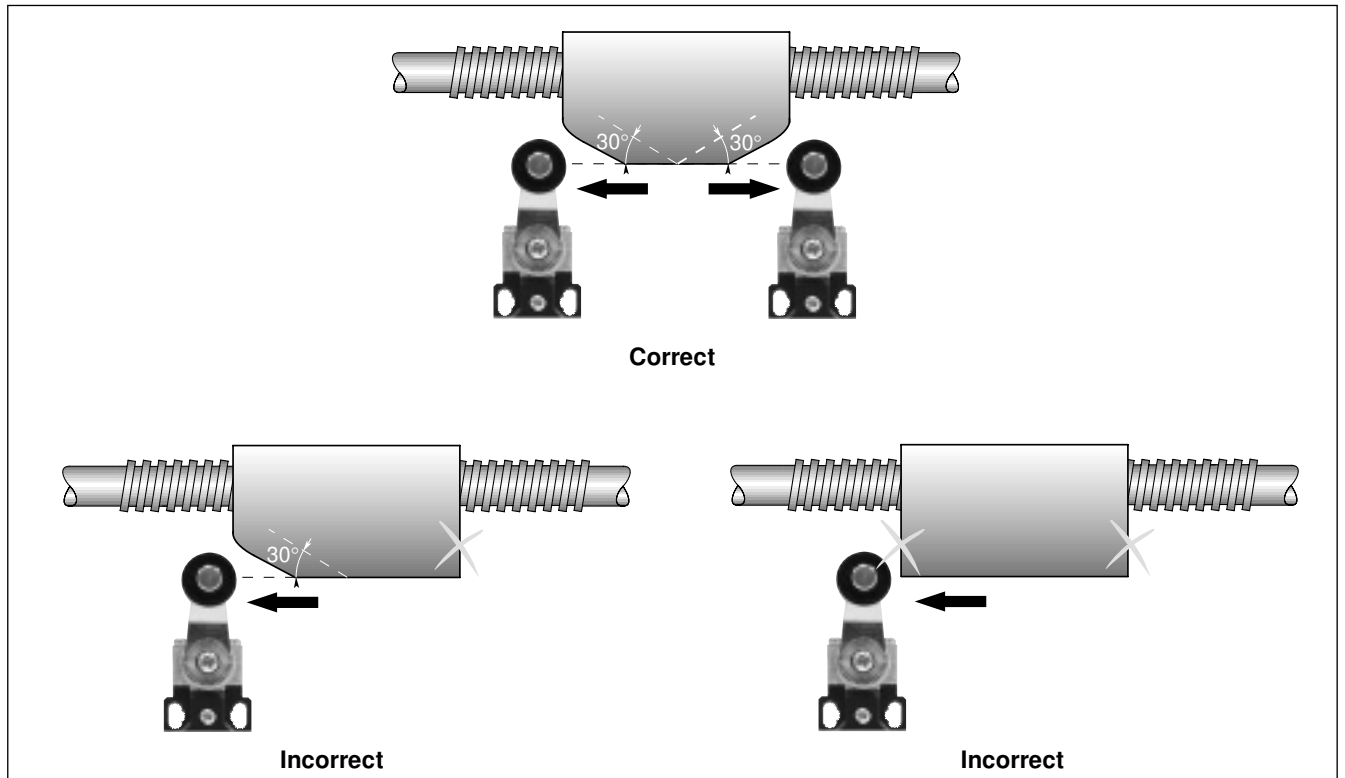

Utilization precautions

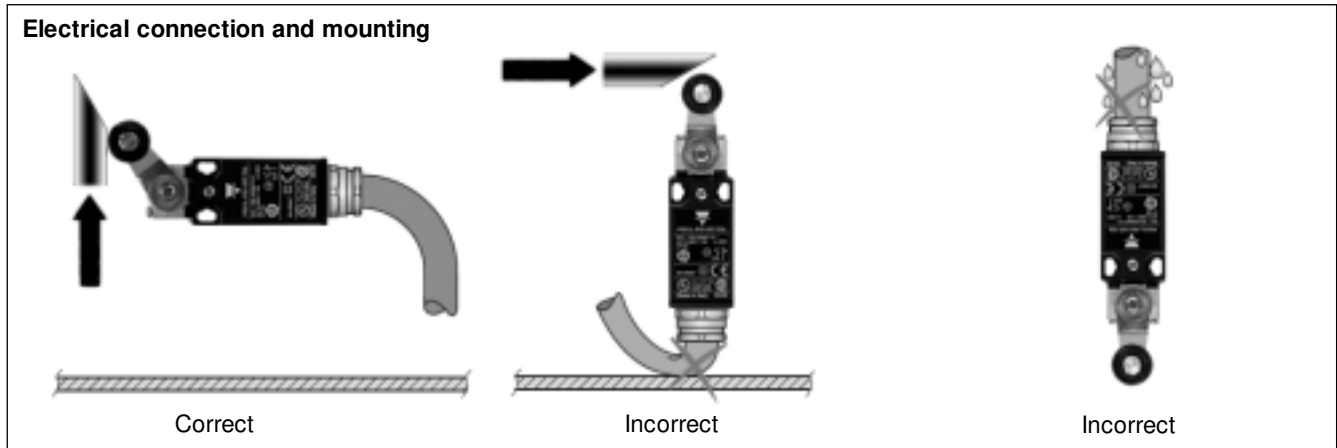

Adjustement

