



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!







Contact us



Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



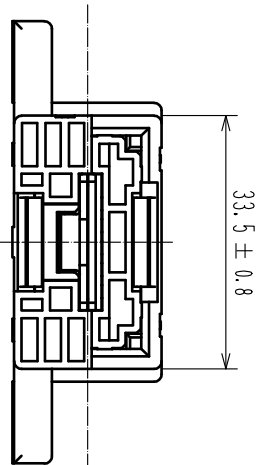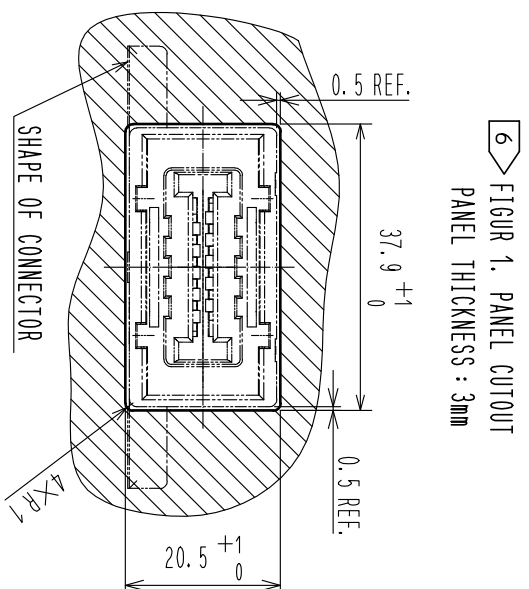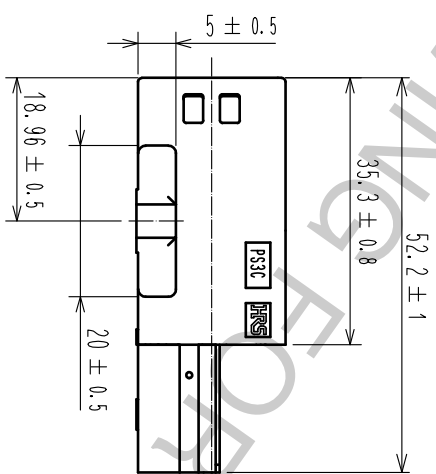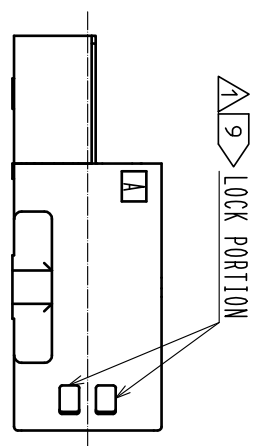

2	COPPER ALLOY	SILVER PLATING	3 μ m MIN	4	PP	
1	PBT	BLACK	UL94V-0	3	PBT	BLACK UL94V-0
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS		SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED
mm		1 : 1	4	DIS-E-00000029	WR. YAMADA	MM. NISHIMATSU
APPROVED : MM. NISHIMATSU				DRAWING NO.		
14.07.23				EDC3-128552-00		
CHECKED : MM. NISHIMATSU				PART NO.		
14.07.23				PS3C-A-1US		
DESIGNED : WR. YAMADA				CODE NO.		
14.07.22				CL236-1062-0-00		
DRAWN : WR. YAMADA				14.07.22		
				 1/2		

7 CONDITION OF SAFETY STANDARD(UL, C-UL, TUV STANDARD)

7 TABLE 1. UL, C-UL CONDITION

	CONDITION 1	CONDITION 2
CURRENT VOLTAGE(AC/DC)	600V	
CURRENT RATING	100A	150A
CABLE	14 TO 22sq(※1)	38 TO 50sq(※1)
CREEPAGE DISTANCE(※2)	MIN:3.2mm	
CLEARANCE DISTANCE(※2)	MIN:3.2mm	

7 TABLE 2. TUV CONDITION

	CONDITION I	CONDITION II	CONDITION III
CURRENT VOLTAGE(AC/DC)	800V	600V	1000V
CURRENT RATING	100A(CABLE 14 TO 22sq ※1) 125A(CABLE 38sq ※1) 150A(CABLE 50sq ※1)		
OVER VOLTAGE CATEGORY	II	III	
POLLUTION DEGREE	3		
CREEPAGE DISTANCE(※2)	MIN:12.6mm	MIN:12.6mm	MIN:16mm
CLEARANCE DISTANCE(※2)	MIN:6mm	MIN:6mm	MIN:8mm
INSULATION SYSTEM	BASIC INSULATION(PANEL HAS THE EARTH)		

※1 : AS SCREWS AND CRIMP TERMINAL ATTACHED WITH POWER CONTACT HAVE AN IMPACT ON THE CREEPAGE DISTANCE AND THE CLEARANCE DISTANCE,PLEASE USE RECOMMENDED SCREWS AND CRIMP TERMINALS. IN CASE YOU USE CABLES OTHER THAN FOLLOWING RECOMMENDED SCREWS AND CONTACTS, PLEASE BE CAREFUL THAT THE CREEPAGE DISTANCE AND THE CLEARANCE DISTANCE MEET THE STANDARD OF UL, C-UL, TUV.

※2 : THE COVERAGE OF THE CREEPAGE DISTANCE AND THE CLEARANCE DISTANCE IS AS FOLLOWS.
-BETWEEN PLUS POWER SUPPLY CONTACT AND MINUS POWER SUPPLY CONTACT
-BETWEEN PLUS CRIMP TERMINAL AND MINUS CRIMP TERMINAL
-BETWEEN POWER CONTACT AND PANEL
-BETWEEN CRIMP TERMINAL AND PANEL
-BETWEEN SCREWS (ATTACHEHD WITH POWER CONTACT) AND PANEL

NOTE 1. THE MATING PARTNER OF THIS PRODUCT IS PS3C-A-1UP(CL236-1064-5-00).

2 THE TIGHTINING TORQUE FOR THE SCREW ATTACHED WITH REF NO. 2 IS 2.5 TO 5.2 N・m.
THE RECOMMENDED SCREW AND CRIMP TERMINAL IS AS FOLLOWS.
-RECOMEDNED SCREW : JIS B 1188 SPRING WASHER + CROSS RECESSED PAN HEAD SCREW WITH CAPTIVE POLISHED CIRCULAR WASHER M6 × 12
-RECOMMENDED CRIMP TERMINAL
CABLE 14sq : JIS C 2805 R14-6
CABLE 22sq : JIS C 2805 R22-6
CABLE 38sq : MANUFACTURED BY NICHIFU CO., LTD R38-6S
CABLE 50sq : MANUFACTURED BY NICHIFU CO., LTD R60-6S

3 THE SCREW USED TO ATTACH REF NO. 3 IS M4.
THE TIGHTNING TORQUE FOR SCREW IS 1.2 TO 2.1 N・m.

4 SINCE THE POWER CONTACTS ARE SILVER PLATED, THEY MAY REACT WITH SULFIDE IN THE ATMOSPHER TO CHANGE THE COLOUR TO BLACKISH BROWN.

5 THE SALES UNIT IS ONE PIECE AND ONE BOX IS 60 PIECES.
PLEASE REFER ETAP-E3129.

6 PLEASE SEE THE FIGURE 1 FOR THE RECOMMENDED PANEL DIMENSION.

7 THIS ITEM IS PLANNING TO BE APPROVED BY SAFETTY STANDARD(UL, C-UL, TUV STANDARD) UNDER THE CONDITON OF TABLE 1 AND TABLE 2
SAFETY STANDARD IS DEFERENT UP TO THE APPLIED RATED VOLTAGE AND CURRENT
PLEASE SEE THE TABLE 1 AND TABLE 2.

8. THE POWER CONTACT OF THIES PRODUCT IS NOT APPLICABLE FOR HOT-SWAP.
IT CAN NOT BE USED TO INTERRUPT THE POWER.

9 PLEASE MAKE SURE THE LOCK PORTION AND MATING COMPLETELY WITH PS3C-A-1UP.

DRAWING NO.		EDC3-128552-00	
PART NO.	PS3C-A-1US		
CODE	CL236-1062-0-00		
NO.			A/2/2