



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






PSB50/40/30 Series

PSB50 50 W
PSB40 40 W
PSB30 30 W

50, 40 & 30 W Programmable Constant Current LED Driver with Tri-Mode Dimming™ (TRIAC, ELV & 0-10 V)

Nominal Input Voltage	Max. Output Power	Efficiency	Max. Case Temperature	THD	Power Factor	Dimming Method	Dimming Range	Startup Time
120/277 Vac, 220 to 240 Vac	50 W	up to 90% typical	90°C (measured at the hot spot)	< 20% (from 100% to 50% of max rated power)	> 0.9 (from 100% to 50% of max rated power)	Forward-Phase, Reverse-Phase & 0-10V	1 - 100% (% of Iout)	300 ms typical

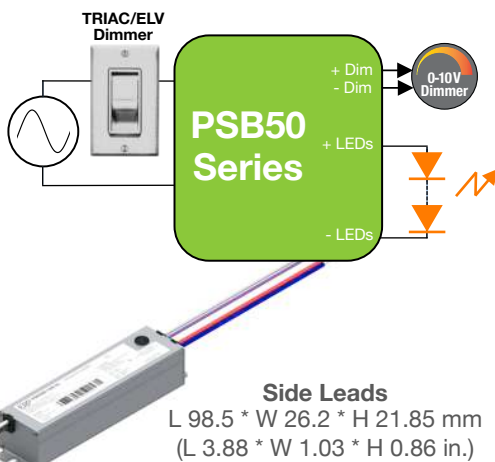

Part Number	Nominal Input Voltage (Vac)	Max Output Power (W)	Iout (mA)	Output Voltage Range (Vdc)	
				Min.	Max.
120/277 VAC NOMINAL INPUT VOLTAGE					
PSB30W					
PSB30W-0700-42	120/277	29.4	350 to 700	28	42
PSB30W-1050-27	120/277	28.4	525 to 1050	18	27
PSB30W-0700-34	120/277	27.2	350 to 700	23	34
PSB40W					
PSB40W-1400-27	120/277	37.8	700 to 1400	18	27
PSB50W					
PSB50W-0550-85	120/277	46.8	275 to 550	57	85
PSB50W-0850-56	120/277	47.6	425 to 850	38	56
PSB50W-1200-42	120/277	50.4	600 to 1200	28	42
PSB50W-1400-34	120/277	47.6	700 to 1400	23	34
120/277 VAC NOMINAL INPUT VOLTAGE					
PSB30W					
PSB30W-0700-42-S	120/277	29.4	350 to 700	28	42
PSB30W-1050-27-S	120/277	28.4	525 to 1050	18	27
PSB30W-0700-34-S	120/277	27.2	350 to 700	23	34
PSB40W					
PSB40W-1400-27-S	120/277	37.8	700 to 1400	18	27
PSB50W					
PSB50W-0550-85-S	120/277	46.8	275 to 550	57	85
PSB50W-0850-56-S	120/277	47.6	425 to 850	38	56
PSB50W-1200-42-S	120/277	50.4	600 to 1200	28	42
PSB50W-1400-34-S	120/277	47.6	700 to 1400	23	34
220 to 240 VAC NOMINAL INPUT VOLTAGE					
PSB30W					
PSB30W-0700-42-T	220 to 240	29.4	350 to 700	28	42
PSB30W-1050-27-T	220 to 240	28.4	525 to 1050	18	27
PSB30W-0700-34-T	220 to 240	27.2	350 to 700	23	34
PSB40W					
PSB40W-1400-27-T	220 to 240	37.8	700 to 1400	18	27
PSB50W					
PSB50W-0550-85-T	220 to 240	46.8	275 to 550	57	85
PSB50W-0850-56-T	220 to 240	47.6	425 to 850	38	56
PSB50W-1200-42-T	220 to 240	50.4	600 to 1200	28	42
PSB50W-1400-34-T	220 to 240	47.6	700 to 1400	23	34

OTHER MOUNTING OPTIONS



FEATURES

- Non-linear 0-10V dimming profile with dim-to-off (10V to 9.1V=100%, 1.5V to 0.6V=1%, <0.6V=dim-to-off)
- UL Class P
- Class 2 power supply
- Lifetime: 50,000 hours @ Tc = 75°C
- 90°C maximum case hot spot temperature
- IP20-rated (IP64 as option) case with silicone-based potting
- Surge protection:
 - IEC61000-4-5: 2 kV line to line/2 kV line to earth
 - 2.5 kV ring wave: ANSI/IEEE c62.41.1-2002 & c62.41.2-2002 category A
- Complies with ENERGY STAR®, DLC (DesignLight Consortium®) and CA Title 24 technical requirements

PROGRAMMING

- Serial port programming
 - Current: 100% to 50% in each voltage range
 - Data log read: SKU, S/N, lot code, hours of operation, FW rev., fault events: power failure, transients (short or surge), thermal
- Fully programmable and selectable 0-10V dimming profiles: Non-linear with dim-to-off, Logarithmic, Non-Linear without dim-to-off.

Suffix for the different mounting options:
1) NO suffix: side leads
2) "-T" European terminal blocks
3) "-S" Bottom lead exit with studs



CHINA Operations
tel: +86-756-6266298
No. 8 Pingdong Road 2
Zhuhai, Guangdong, China 519060

www.erp-power.com

SaveEnergy@erp-power.com

USA Headquarters
tel: +1-805-517-1300
893 Patriot Drive, Suite E
Moorpark, CA 93021, USA