



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



4-Port Directional Slant 45° MIMO Antenna

2.4-2.49 & 4.9-6.0 MHz 5 dBi 4-PORT DIRECTIONAL MIMO ANTENNA

Laird's PSQ24495 antenna is a 4-port directional antenna for use in 802.11n MIMO applications. The antenna is an excellent choice for high density WiFi applications where adjacent antenna interference is of concern. Equipped with two sets of slant +/-45 degree ports, the antenna takes advantage of both polarization and spatial separation to mitigate multipath issues.

Enclosed in a compact/low profile ASA, UV stable, radome and equipped with an articulating arm that can be affixed to a mast or anchored directly to a vertical surface, the antenna can be oriented to take full advantage of the antenna's directionality. Uniform and symmetrical radiation patterns provide a high-level signal density into defined coverage zones. This antenna will greatly enhance the performance of 802.11n systems where physical obstructions are anticipated. The dual band frequency coverage means that a single type of antenna can be deployed with any MIMO radio in the 2.4- 2.49 MHz and 4.9-6.0 MHz bands.



Patent Pending PSQ24495

FEATURES

- 802.11n MIMO operation.
- Low profile, wide band performance.
- Two sets of slant ±45° polarized radiating elements in a single solution.
- IP67 Rated - ideal for indoor and outdoor use.
- Spatial separation mitigates multipath issues.

MARKETS

- High density WiFi
- Stadiums, arenas, convention centers
- Transport terminals
- Campuses
- Outdoor networks



Standard Articulating Mount

SPECIFICATIONS

Number of ports	Four (4)	
Frequency Bands, MHz	2400-2490	4900-6000
Peak Gain, dBi (Typical)	5.5	6.0
Peak Gain, dBi (Max.)	6.6	7.7
Max Gain + 30°above horizon, dBi	N/A	5.8
Azimuth 3dB Beamwidth, Typ	85°	90°
Elevation 3dB Beamwidth, Typ	110°	85°
VSWR, Typical	< 1.6:1	< 1.9:1
VSWR, Max	< 2.0:1	< 2.0:1
Port-to-Port Isolation, Typical dB	> 16 dB	> 21 dB
Port-to-Port Isolation, Max dB	> 15 dB	> 20 dB
Front -to-Back Ratio	> 13 dB	> 20 dB
Nominal Impedance	50 Ω	
Polarization	Slant ± 45°	
Maximum Input Power (per port)	10 W (ambient temp of 25°C/77°F)	
Dimensions (LxWxH)	202 x 200 x 40mm (7.96" x 7.87" x 1.6")	
Weight (w/o mount)	698 g (1.54 lbs)	
Mounting	Articulating mast/wall mount	
Cable Type	Low temperature Plenum rated	
Wind Survival	200 km/h (125 mph)	
Wind Gust Survival	266 km/h (165 mph)	
Ingress Protection	IP67	
Operating Temparture	-30°C to +70°C (-22°F to +158°F)	
Storage Temparture	-40°C to +85°C (-40°F to +185°F)	
Radome / Baseplate Material	ASA LURAN S778T	
Material Compliance	RoHS Compliant	

Americas: +1.847 839.6925
IAS-AmericasSales@lairdtech.com

Europe: +44.1628.858941
IAS-EUSales@lairdtech.com

Asia: IAS-AsiaSales@lairdtech.com


Middle East and Africa: +44.1628.858941 IAS-
MEAUSales@lairdtech.com
www.lairdtech.com

Smart Technology. Delivered.

CONFIGURATION

PART NUMBER	CABLE LENGTH	CONNECTOR
PSQ24495-91NF	4x- 91 cm (3.00 ft)	Type N- Female
PSQ24495-91NM	4x- 91 cm (3.00 ft)	Type N- Male
PSQ24495-91RSM	4x-91cm (3.00 ft)	Type SMA - Male Reverse Polarity

RADIATION PATTERNS

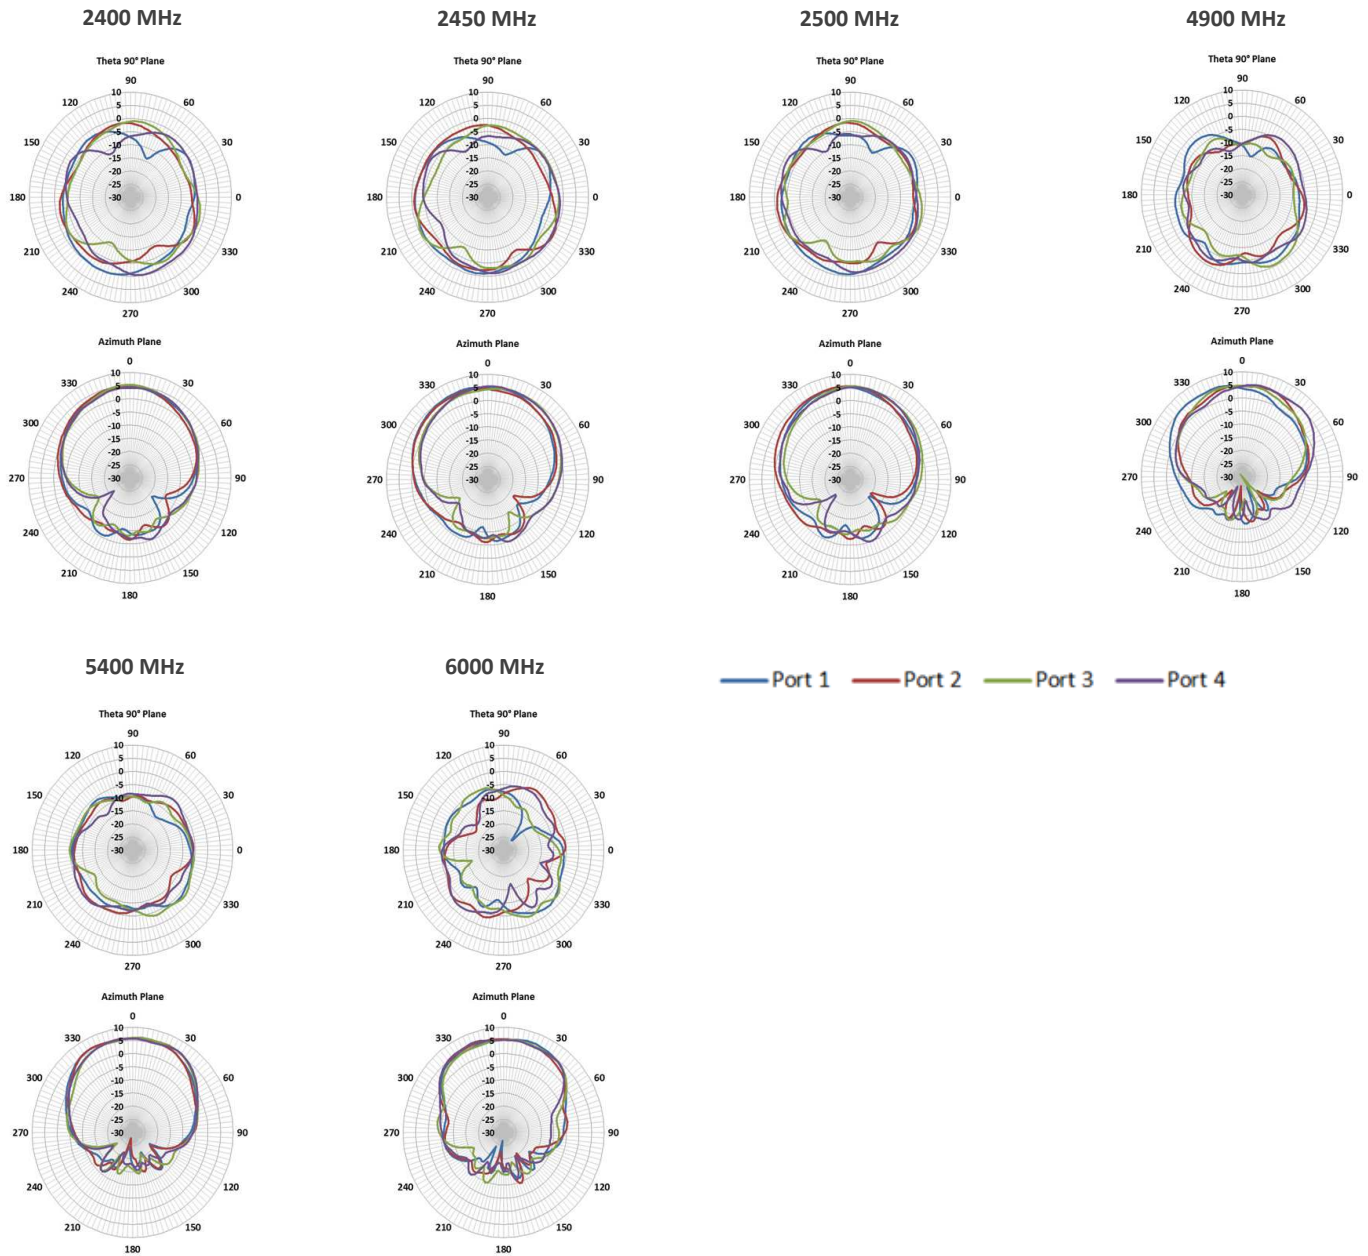

ANT-DS-PSQ24495 0617

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2017 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trademarks or registered trademarks of Laird Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.