



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## PT39 LEDs



### Table of Contents

|  |       |
|--|-------|
| Technology Overview . . . . .                        | 2     |
| Understanding Big Chip Test Specifications . . . . . | 2     |
| Ordering Information . . . . .                       | 3     |
| Flux /Power Bin Definition . .                       | 4     |
| Optical & Electrical Characteristics . . . . .       | 5-6   |
| Blue Flux Bin Ranges by Wavelength . . . . .         | 7     |
| Parametric Graphs . . . . .                          | 8-9   |
| Thermal Resistance . . . . .                         | 10    |
| Mechanical Dimensions                                | 11-12 |
| Shipping Tray Outline . . . .                        | 13    |
| Packing and Shipping Specifications . . . . .        | 14    |
| History of Changes . . . . .                         | 15    |

### Features:

- Matched RGB Chipset with 3.9 mm<sup>2</sup> emitting area designed for LED projector applications
- Photonic lattice technology for very high surface brightness and uniform surface emission
- Wide color gamut: RED 623 nm, Red-Amber 615nm, GREEN 526 nm, Blue 460nm typical dominant wavelength
- Single emitting area per color allows for collection with single lens for simplified optics
- Aspect ratio optimized and compatible with micro-display diagonal sizes ranging from 0.45" to 0.55" with 4:3 aspect ratio.
- Thermally efficient Common Anode copper-core PCB package
- RoHS (EU-2002/95/EC Directive) and REACH compliant

### Applications

- Specifically engineered for high brightness pocket-size, ultra portable front projectors, head-up projection displays and hybrid projectors
- Optimized for Micro-Display diagonal sizes ranging from 0.45" to 0.55".
- Suitable for DLP™ (0.45" WXGA, 0.55" SVGA), LCoS and HTPS /3LCD microdisplays

## Technology Overview

Luminus Big Chip LEDs™ benefit from a suite of innovations in the fields of chip technology, packaging and thermal management. These breakthroughs allow illumination engineers and system designers to achieve solutions that are high brightness and high efficiency.

### Photonic Lattice Technology

Luminus' photonic lattice technology enables large area LED chips with uniform brightness over the entire LED chip surface. The optical power and brightness produced by these large monolithic chips enable solutions which replace arc and halogen lamps where arrays of traditional high power LEDs cannot.

For red, green and blue LEDs, the photonic lattice structures extract more light and create radiation patterns that are more collimated than traditional LEDs. (Having higher collimation from the source increases optical collection efficiencies and simplifies optical designs.)

### Packaging Technology

Thermal management is critical in high power LED applications. With a thermal resistance from junction to case of 1.6° C/W, Luminus PT39 LEDs can be driven at higher current densities while maintaining a low junction temperature, thereby resulting in brighter solutions and longer lifetimes.

### Reliability

For high power operation, Luminus Big Chip LEDs are one of the most reliable light sources in the world today. Big Chip LEDs have passed a rigorous suite of environmental and mechanical stress tests, including mechanical shock, vibration, temperature cycling and humidity, and have been fully qualified for use in extreme high power and high current applications. With very low failure rates and median lifetimes that typically exceed 60,000 hours, Luminus Big Chip LEDs are ready for even the most demanding applications. (Please refer to Luminus' Reliability application note for more information.)

### Environmental Benefits

Luminus LEDs help reduce power consumption and the amount of hazardous waste entering the environment. All Big Chip LED products manufactured by Luminus are RoHS and REACH compliant and free of hazardous materials, including lead and mercury.

## Understanding Big Chip LED Test Specifications

Every Luminus LED is extensively tested at full current to ensure that it meets the high quality standards expected from Luminus' products.

### Testing of Big Chip LEDs

Luminus core board products are typically measured in such a way that the characteristics reported agree with how the devices will actually perform when incorporated into a system. This measurement is accomplished by mounting the devices on a 40°C heat sink and allowing the device to reach thermal equilibrium while fully powered. Only after the device reaches equilibrium are the measurements taken. This method of measurement ensures that Luminus Big Chip LEDs perform in the field just as they are specified.

Luminus surface mount LEDs are typically tested with a 20mSec input pulse and a junction temperature of 25°C. Expected flux values in real world operation can be extrapolated based on the information contained within this product data sheet.



### Ordering Information

| Ordering Part Number <sup>1</sup> | Color     | Min Flux or Power Bin <sup>2</sup> | Description   |
|-----------------------------------|-----------|------------------------------------|---|
| PT-39-R-C21-MPB                   | Red       | 2B1                                | Red LED, consisting of a 3.9 mm <sup>2</sup> Red LED chip, thermistor and connector mounted on a copper-core PCB.             |
| PT-39-R-C21-MPC                   |           | 2B2                                |   |
| PT-39-R-C21-MPD                   |           | 2C                                 |   |
| PT-39-RA-C21-MPE                  | Red Amber | 2D                                 | Red-Amber LED, consisting of a 3.9 mm <sup>2</sup> Red-Amber LED chip, thermistor and connector mounted on a copper-core PCB. |
| PT-39-RA-C21-MPF                  |           | 2E                                 |   |
| PT-39-G-C21-MPC                   | Green     | 2C                                 | Green LED, consisting of a 3.9 mm <sup>2</sup> Green LED chip, thermistor and connector mounted on a copper-core PCB.         |
| PT-39-G-C21-MPD                   |           | 2D                                 |   |
| PT-39-G-C21-MPE                   |           | 2E                                 |   |
| PT-39-G-C21-MPF                   |           | 2F                                 |   |
| PT-39-B-C21-EPA                   | Blue      | 2D                                 | Blue LED, consisting of a 3.9 mm <sup>2</sup> Blue LED chip, thermistor and connector mounted on a copper-core PCB.           |
| PT-39-B-C21-EPB                   |           | 2E                                 |   |
| PT-39-B-C21-EPC                   |           | 2F                                 |   |

Note 1: Ordering part numbers represent bin kits (group of bins that are shippable for a given ordering part number)

Note 2: See Bin Kit and Flux / Power bin definitions on page 4

### Ordering Part Number Nomenclature

XXX — 00 — XXXX — X00 — XXX

| Product Family          | Chip Area               | Color   | Package Configuration   | Bin Kit <sup>1</sup>              |
|-------------------------|-------------------------|---|---|-----------------------------------|
| PT: Metal Coreboard PCB | 39: 3.9 mm <sup>2</sup> | R= Red (623nm, typ)<br>RA= Red -Amber (615nm, typ)<br>G= Green<br>B= Blue | C21: 26.5mm x 16.0 mm (standard)<br>C22: 26.5mm x 16.0 mm (die rotated)<br><br>See Mechanical Drawing section | See page 4 for bin kit definition |

Note 1: A Bin Kit represents a group of individual flux or power bins that are shippable for a given ordering part number. Individual flux bins are not orderable.

EXAMPLES:

PT-39-R-C21-MPD is comprised of Red-Amber Flux Bins 2C, 2D, 2E, 2F, 2G.

PT-39-R-C22-MPD is comprised of Red Flux Bins 2C, 2D, 2E, 2F, 2G (Die rotated package configuration).

**PT39 Bin Kit<sup>1</sup> and Flux Bin<sup>2,3,4</sup> Definitions**

Note: Please refer to ordering part number table on page 3 for Bin Kit availability

| Red Flux Bins                         | Bin 2B1                             | Bin 2B2                             | Bin 2B3                             | Bin 2C                              | Bin 2D                              | Bin 2E                              | Bin 2F                              | Bin 2G                              | Bin 2H           |                  |
|---------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|------------------|------------------|
| <b>Red Bin Flux Range (lm)</b>        | <b>455-475</b>                      | <b>475-490</b>                      | <b>490-530</b>                      | <b>530-580</b>                      | <b>580-635</b>                      | <b>635-690</b>                      | <b>690-745</b>                      | <b>745-800</b>                      | <b>800-860</b>   |                  |
| PT-39-R-C21-MPB                       | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |                                     |                                     |                                     |                  |                  |
| PT-39-R-C21-MPC                       |                                     | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |                                     |                                     |                  |                  |
| PT-39-R-C21-MPD                       |                                     |                                     |                                     | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |                  |                  |
| <b>Red -Amber Flux Bins</b>           | <b>Bin 2D</b>                       | <b>Bin 2E</b>                       | <b>Bin 2F</b>                       | <b>Bin 2G</b>                       | <b>Bin 2H</b>                       | <b>Bin 2J</b>                       | <b>Bin 2K</b>                       | <b>Bin 2L</b>                       | <b>Bin 2M</b>    |                  |
| <b>Red -Amber Bin Flux Range (lm)</b> | <b>580-635</b>                      | <b>635-690</b>                      | <b>690-745</b>                      | <b>745-800</b>                      | <b>800-860</b>                      | <b>860-925</b>                      | <b>925-990</b>                      | <b>990-1055</b>                     | <b>1055-1125</b> |                  |
| PT-39-RA-C21-MPE                      | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |                                     |                                     |                                     |                  |                  |
| PT-39-RA-C21-MPF                      |                                     | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |                                     |                                     |                  |                  |
| <b>Green Flux Bins</b>                | <b>Bin 2C</b>                       | <b>Bin 2D</b>                       | <b>Bin 2E</b>                       | <b>Bin 2F</b>                       | <b>Bin 2G</b>                       | <b>Bin 2H</b>                       | <b>Bin 2J</b>                       | <b>Bin 2K</b>                       | <b>Bin 2L</b>    | <b>2M</b>        |
| <b>Green Bin Flux Range (lm)</b>      | <b>1030-1100</b>                    | <b>1100-1200</b>                    | <b>1200-1250</b>                    | <b>1250-1330</b>                    | <b>1330-1450</b>                    | <b>1450-1550</b>                    | <b>1550-1660</b>                    | <b>1660-1780</b>                    | <b>1780-1900</b> | <b>1900-2020</b> |
| PT-39-G-C21-MPC                       | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |                                     |                                     |                                     |                  |                  |
| PT-39-G-C21-MPD                       |                                     | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |                                     |                                     |                  |                  |
| PT-39-G-C21-MPE                       |                                     |                                     | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |                                     |                  |                  |
| PT-39-G-C21-MPF                       |                                     |                                     |                                     | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |                  |                  |
| <b>Blue Power Bins</b>                | <b>Bin 2D</b>                       | <b>Bin 2E</b>                       | <b>Bin 2F</b>                       | <b>Bin 2G</b>                       | <b>Bin 2H</b>                       | <b>Bin 2J</b>                       | <b>Bin 2K</b>                       | <b>Bin 2L</b>                       | <b>Bin 2M</b>    |                  |
| <b>Blue Bin Flux Range (lm)</b>       | <b>190-215</b>                      | <b>215-235</b>                      | <b>235-255</b>                      | <b>255-280</b>                      | <b>280-300</b>                      | <b>300-320</b>                      | <b>320-345</b>                      | <b>345-370</b>                      | <b>370-400</b>   |                  |
| PT-39-B-C21-EPA                       | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |                                     |                                     |                                     |                  |                  |
| PT-39-B-C21-EPB                       |                                     | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |                                     |                                     |                  |                  |
| PT-39-B-C21-EPC                       |                                     |                                     | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |                                     |                  |                  |

Note 1: Bin Kits are defined by a group of flux or power bins. Only one flux bin will be shipped in each individual pack. A shipment will contain packs of different allowed flux bins for a particular ordering part number. Individual Flux or Power bins are not orderable.

Note 2: PT39 LEDs are tested for luminous flux at 9.8A at 25% duty cycle for Red, Red-Amber and Blue, and at 50% duty cycle for Green Devices. Devices are sorted and packed by flux bin. Not all flux bins are currently populated.

Note 3: Luminus maintains a test measurement accuracy for LED flux and power of +/- 6%.


Note 4: Blue Flux bin limits are defined at reference dominant wavelength of 462nm. See table on page 7 for Blue bin limits at other dominant wavelengths.

## Optical & Electrical Characteristics

| General Characteristics  |     | Symbol            | Red         | Red -Amber Preliminary | Green       | Blue        | Unit            |
|--|-----|-------------------|-------------|------------------------|-------------|-------------|-----------------|
| Emitting Area  |     | x                 | 3.9         | 3.9                    | 3.9         | 3.9         | mm <sup>2</sup> |
| Emitting Area Dimensions   |     | x                 | 2.09 x 1.87 | 2.09 x 1.87            | 2.09 x 1.87 | 2.09 x 1.87 | mmxmm           |
| <b>Characteristics at Recommended Test Drive Current , I<sub>f</sub><sup>1,2</sup></b>                   |     |                   |             |                        |             |             |                 |
| Reference Duty Cycle <sup>3</sup>  |     |                   | 25          | 25                     | 50          | 25          | %               |
| Test Peak Drive Current <sup>1,2,4</sup>   | typ | I <sub>F</sub>    | 9.8         | 9.8                    | 9.8         | 9.8         | A               |
| Peak Luminous Flux <sup>1,2,5</sup>  | typ | Φ <sub>v</sub>    | 575         | 750                    | 1400        | 235         | lm              |
| Peak Radiometric Flux <sup>1,2</sup>   | typ | Φ <sub>r</sub>    | 3.2         | 3.1                    | 2.9         | 5.0         | W               |
| Dominant Wavelength  | min | λ <sub>dmin</sub> | 619         | 611                    | 516         | 450         | nm              |
|  | typ | λ <sub>d</sub>    | 623         | 615                    | 525         | 460         | nm              |
|  | max | λ <sub>dmax</sub> | 630         | 622                    | 535         | 468         | nm              |
| FWHM- Spectral bandwidth at 50% of Φ <sub>v</sub>  | typ |                   | 19          | 19                     | 34          | 20          | nm              |
| Chromaticity Coordinates <sup>6,7</sup>  | typ | x                 | 0.698       | 0.680                  | 0.167       | 0.147       |                 |
|  | typ | y                 | 0.302       | 0.320                  | 0.704       | 0.033       |                 |
| Forward Voltage  | min | V <sub>Fmin</sub> | 2.2         | 2.2                    | 3.5         | 3.2         | V               |
|  | typ | V <sub>F</sub>    | 2.6         | 2.6                    | 4.9         | 3.9         | V               |
|  | max | V <sub>Fmax</sub> | 3.2         | 3.2                    | 5.9         | 5.2         | V               |
| Dynamic Resistance   | typ |                   | 0.05        | 0.05                   | 0.08        | 0.05        | Ω               |
| <b>Device Thermal Characteristics</b>  |     |                   |             |                        |             |             |                 |
| Thermal Coefficient of Photometric Flux  | typ |                   | -1.0        | tbd                    | -0.2        | ~0          | % / °C          |
| Thermal Coefficient of Radiometric Flux  | typ |                   | -0.6        | tbd                    | -0.2        | -0.2        | % / °C          |
| Forward Voltage Temperature Coefficient  | typ |                   | -1.5        | tbd                    | -1.0        | -3          | mV/ °C          |
| <b>Characteristics at Reference Continuous Drive Current I<sub>F</sub> (continuous wave)<sup>1</sup></b> |     |                   |             |                        |             |             |                 |
| Reference Drive Current  | typ | I <sub>F</sub>    | 5.9         | 5.9                    | 5.9         | 5.9         | A               |
| Luminous Flux  | typ | Φ <sub>v</sub>    | 320         | 420                    | 1000        | 175         | lm              |
| Radiometric Flux   | typ | Φ <sub>r</sub>    | 1.8         | 1.7                    | 1.9         | 3.3         | W               |
| Dominant Wavelength  | typ | λ <sub>d</sub>    | 624         | 616                    | 528         | 462         | nm              |
| FWHM -Spectral bandwidth at 50% of Φ <sub>v</sub>  | typ |                   | 18          | 18                     | 36          | 21          | nm              |
| Chromaticity Coordinates <sup>6,7</sup>  | typ | x                 | 0.700       | 0.682                  | 0.171       | 0.145       | nm              |
|  | typ | y                 | 0.300       | 0.318                  | 0.702       | 0.036       | nm              |
| Forward Voltage  | typ | V <sub>F</sub>    | 2.3         | 2.3                    | 4.4         | 3.4         | V               |

## Optical & Electrical Characteristics

Note 1: All ratings are based on testing conditions with a constant heat sink temperature  $T_{hs} = 40^{\circ}\text{C}$ . See Thermal Resistance section for  $T_{hs}$  definition.

Note 2: Parameters rated at test duty cycle and Pulsed operation frequency  $f > 240\text{Hz}$ ;  $DC = \frac{t}{T}$  

Note 3: Duty Cycle used to specify device ratings under Pulsed operation. Big Chip LED devices can operate at duty cycles ranging from 1% to 100%. At higher duty cycles, drive current should be adjusted to maintain the junction temperature at desired levels to meet the application lifetime requirements.

Note 4: In pulsed operation, rise time from 10 to 90% of forward current should be larger than 0.5 microseconds

Note 5: For Blue devices, total flux from emitting area at typical dominant wavelength. Refer to page 7 for brightness specifications at other wavelength

Note 6: In CIE 1931 chromaticity diagram coordinates, normalized to  $X+Y+Z=1$

Note 7: For Reference only

### Absolute Maximum Ratings

|   | Symbol     | Red        | Red -Amber | Green      | Blue       | Unit               |
|---|------------|------------|------------|------------|------------|--------------------|
| Minimum Current (CW or Pulsed) <sup>1</sup>   |            | 200        | 200        | 200        | 200        | mA                 |
| Maximum Current (CW) <sup>2</sup>   |            | 9.8        | 9.8        | 9.8        | 9.8        | A                  |
| Maximum Current (Pulsed) <sup>1,2</sup><br>( $t \leq 2.5\text{ms}$ , frequency $> 240\text{Hz}$ , duty cycle $< 60\%$ ) |            | 12         | 12         | 12         | 12         | A                  |
| Absolute Maximum Junction Temperature <sup>2</sup>  | $T_{jmax}$ | 110        | 110        | 170        | 170        | $^{\circ}\text{C}$ |
| Storage Temperature Range   |            | -40 / +100 | -40 / +100 | -40 / +100 | -40 / +100 | $^{\circ}\text{C}$ |

Note 1: Luminus Big Chip LEDs are designed for operation to an absolute maximum forward drive current density of  $2.5\text{A}/\text{mm}^2$  cw, and  $3\text{A}/\text{mm}^2$  pulsed ( $f > 240\text{Hz}$ , duty cycle  $< 60\%$ ). Please refer to absolute maximum rating table above for specific absolute maximum currents for the products covered in this datasheet.

Product lifetime data is specified at recommended forward drive currents. Sustained operation at absolute maximum currents will result in a reduction of device lifetime compared to recommended forward drive currents. Actual device lifetimes will also depend on junction temperature (see note 2 below). Refer to lifetime derating curves for further information.

Note 2: Sustained operation at or above Maximum Operating Junction Temperature ( $T_{jmax}$ ) will result in reduced device life time.

**Blue Bin Flux Ranges by Dominant Wavelength <sup>1,2</sup>**




| DWL (nm) | Bin 2D   |          | Bin 2E   |          | Bin 2F   |          | Bin 2G   |          | Bin 2H   |          | Bin 2J   |          | Bin 2K   |          | Bin 2L   |          |
|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
|          | Min (lm) | Max (lm) | Min (lm) | Max (lm) | Min (lm) | Max (lm) | Min (lm) | Max (lm) | Min (lm) | Max (lm) | Min (lm) | Max (lm) | Min (lm) | Max (lm) | Min (lm) | Max (lm) |
| 450      | 93       | 105      | 105      | 115      | 115      | 125      | 125      | 137      | 137      | 147      | 147      | 156      | 156      | 169      | 169      | 181      |
| 451      | 101      | 114      | 114      | 125      | 125      | 136      | 136      | 149      | 149      | 159      | 159      | 170      | 170      | 183      | 183      | 197      |
| 452      | 109      | 123      | 123      | 135      | 135      | 146      | 146      | 161      | 161      | 172      | 172      | 184      | 184      | 198      | 198      | 212      |
| 453      | 117      | 133      | 133      | 145      | 145      | 157      | 157      | 173      | 173      | 185      | 185      | 197      | 197      | 213      | 213      | 228      |
| 439      | 125      | 142      | 142      | 155      | 155      | 168      | 168      | 185      | 185      | 198      | 198      | 211      | 211      | 227      | 227      | 244      |
| 455      | 133      | 151      | 151      | 165      | 165      | 179      | 179      | 197      | 197      | 211      | 211      | 225      | 225      | 242      | 242      | 260      |
| 456      | 141      | 160      | 160      | 175      | 175      | 190      | 190      | 208      | 208      | 223      | 223      | 238      | 238      | 257      | 257      | 275      |
| 457      | 150      | 169      | 169      | 185      | 185      | 201      | 201      | 220      | 220      | 236      | 236      | 252      | 252      | 272      | 272      | 291      |
| 458      | 158      | 178      | 178      | 195      | 195      | 212      | 212      | 232      | 232      | 249      | 249      | 265      | 265      | 286      | 286      | 307      |
| 459      | 166      | 188      | 188      | 205      | 205      | 222      | 222      | 244      | 244      | 262      | 262      | 279      | 279      | 301      | 301      | 323      |
| 460      | 174      | 197      | 197      | 215      | 215      | 233      | 233      | 256      | 256      | 274      | 274      | 293      | 293      | 316      | 316      | 338      |
| 461      | 182      | 206      | 206      | 225      | 225      | 244      | 244      | 268      | 268      | 287      | 287      | 306      | 306      | 330      | 330      | 354      |
| 462      | 190      | 215      | 215      | 235      | 235      | 255      | 255      | 280      | 280      | 300      | 300      | 320      | 320      | 345      | 345      | 370      |
| 463      | 198      | 224      | 224      | 245      | 245      | 266      | 266      | 292      | 292      | 313      | 313      | 334      | 334      | 360      | 360      | 386      |
| 464      | 206      | 233      | 233      | 255      | 255      | 277      | 277      | 304      | 304      | 326      | 326      | 347      | 347      | 374      | 374      | 402      |
| 465      | 214      | 242      | 242      | 265      | 265      | 288      | 288      | 316      | 316      | 338      | 338      | 361      | 361      | 389      | 389      | 417      |
| 466      | 222      | 252      | 252      | 275      | 275      | 298      | 298      | 328      | 328      | 351      | 351      | 375      | 375      | 404      | 404      | 433      |
| 467      | 230      | 261      | 261      | 285      | 285      | 309      | 309      | 340      | 340      | 364      | 364      | 388      | 388      | 418      | 418      | 449      |
| 468      | 239      | 270      | 270      | 295      | 295      | 320      | 320      | 352      | 352      | 377      | 377      | 402      | 402      | 433      | 433      | 465      |

Note 1: Flux Min, Max values are continuous as function of dominant wavelength values. For illustration purposes, flux Min and Max values are provided at discrete dominant wavelength values.

Note 2: Luminus maintains a test measurement accuracy for LED flux and power of +/- 6%.






**Luminous Flux variation with Wavelength:  $\Phi_v = f(\lambda_d)$  at Test Drive Current  $I_F = 9.8$  A**

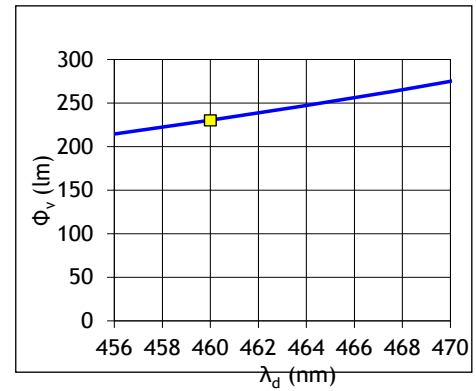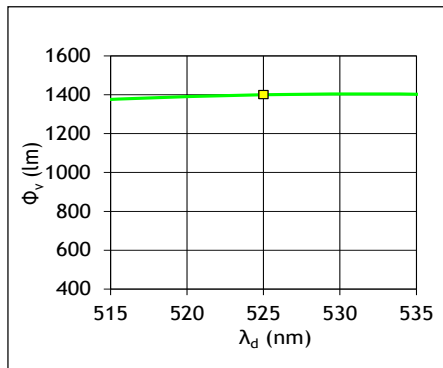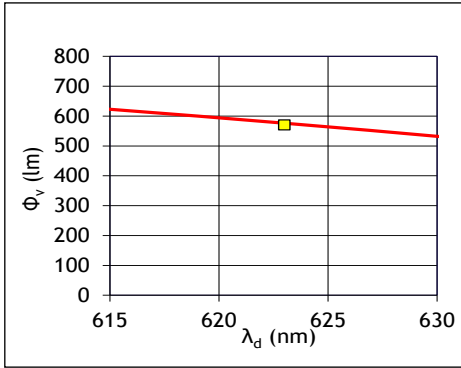




See notes 1,2,3 on page 9. See note 4 on page 9 regarding Red-Amber.

**Luminous Flux variation with Forward Current:  $\Phi_v = f(I_F)$**

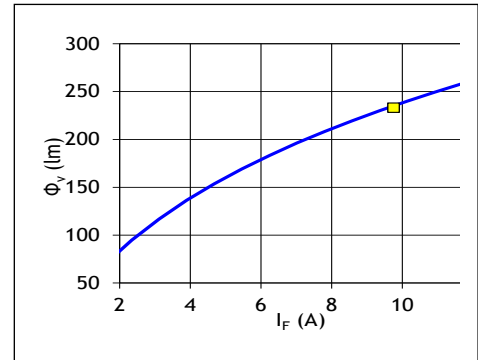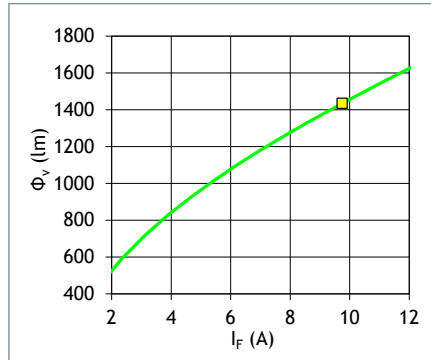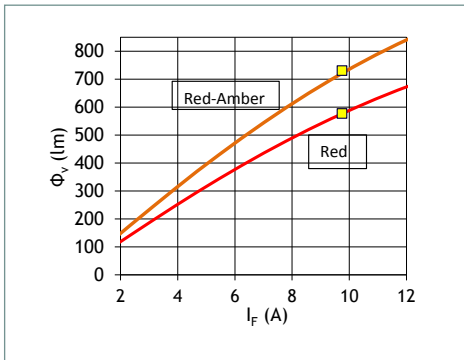




See notes 1,2,3 on page 9.

**Dominant Wavelength variation with Forward Current -  $\lambda_d = f(I_F)$  - Typical**

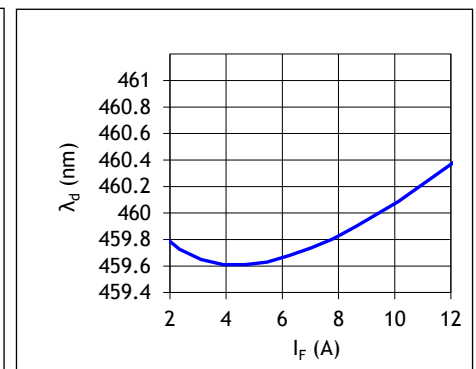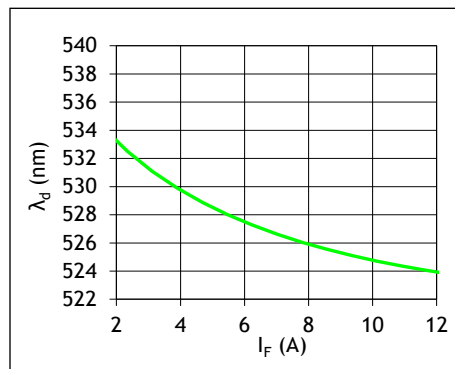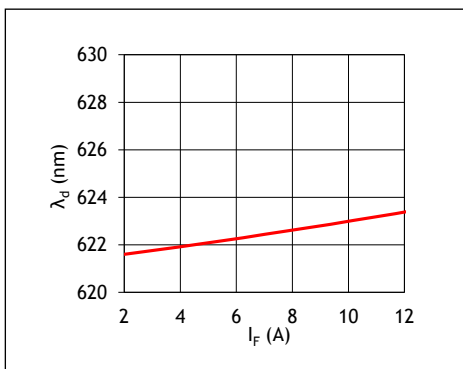


See notes 1,2,3 on page 9. See note 4 on page 9 regarding Red-Amber.

**Forward Voltage variation with Drive current -  $V_F = f(I_F)$  - Typical**

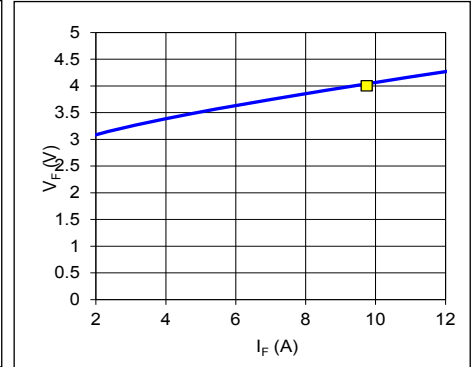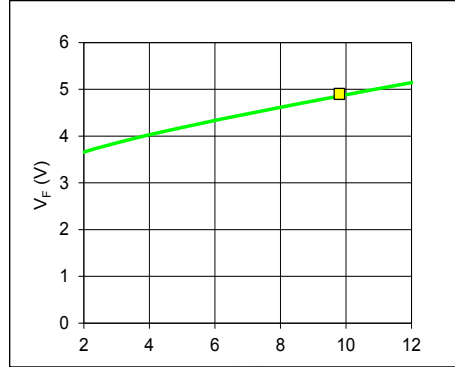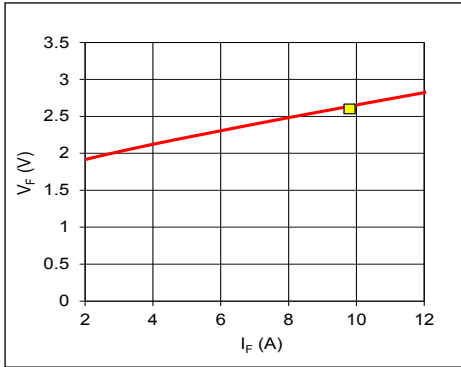

See notes 1,2, 3 on page 9

**Optical Spectrum (Typical)**

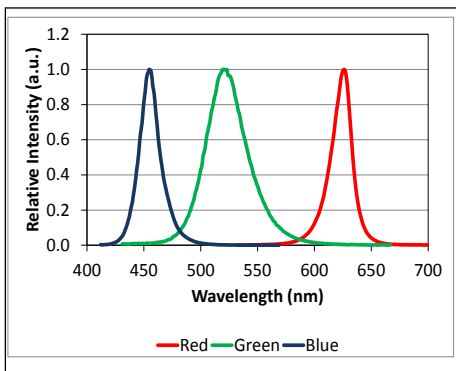

See notes 1,2, 4 on page 9


Note 1: For Pulsed operation, the reference RGB duty cycles used are 25%, 50% and 25% respectively ( $T_{hs}=40^{\circ}C$ ).

Note 2: Yellow square indicate device operating point under reference conditions listed in the Optical and Electrical Characteristics table.

Note 3: Parametric graphs for Red-Amber are TBD. These will be added as they become available.

Note 4: Typical spectrum at recommended peak drive current .

### Thermal Resistance

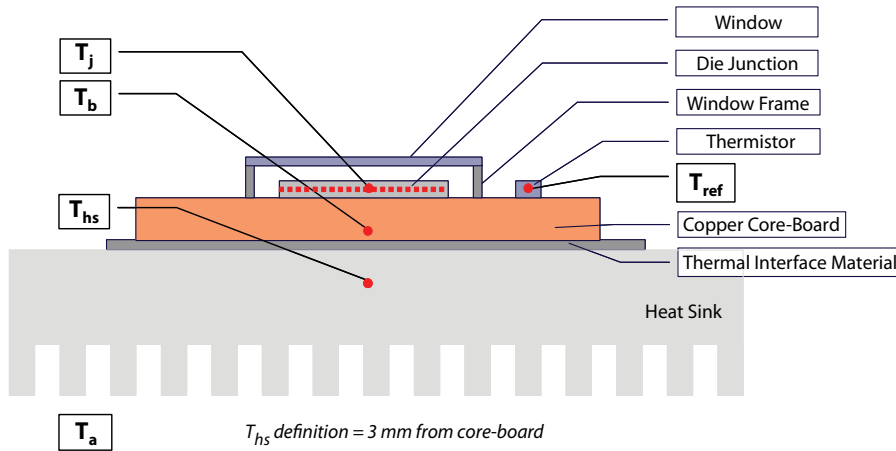

### Typical Thermal Resistance

|                         |          |
|-------------------------|----------|
| $R_{\theta j-b}^1$      | 1.6 °C/W |
| $R_{\theta b-hs}^2$     | 0.2 °C/W |
| $R_{\theta j-hs}^{1,2}$ | 1.8 °C/W |
| $R_{\theta j-ref}^2$    | 1.6 °C/W |

Note 1: Thermal resistance values are based on FEA model results correlated to measured  $R_{\theta j-hs}$  data.


Note 2: Thermal Resistance is based on eGraf 1205 Thermal interface.

### Thermistor Information


The thermistor used in PT39 devices are mounted on coreboards is from Murata Manufacturing Co. The global part number is NCP15XH103J03RC. Please see <http://www.murata.com/> for details on calculating thermistor temperature.

For more information on use of the thermistor, please contact Luminus directly.

### Electrical Pinout

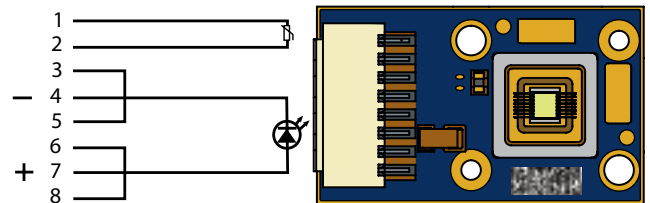

### Mechanical Dimensions - Standard Die Configuration

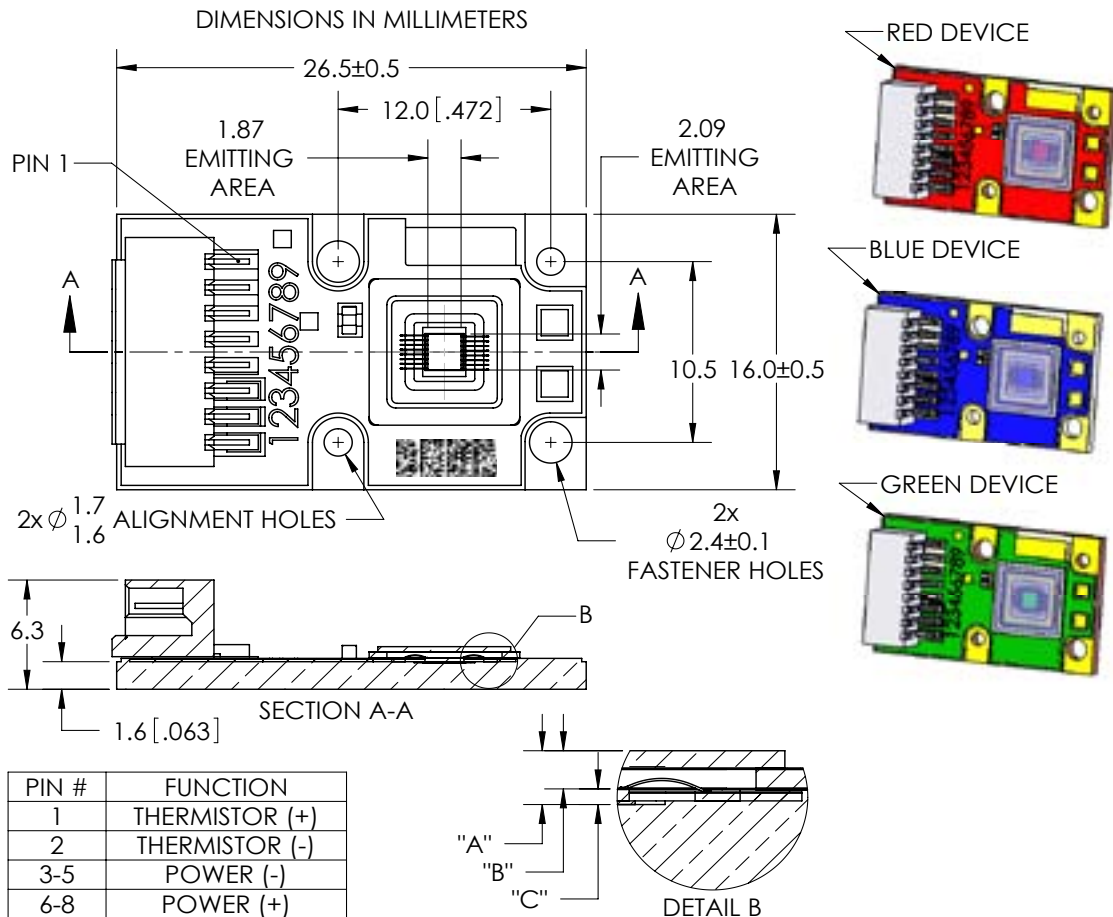


| DIMENSION NAME | DESCRIPTION                             | NOMINAL DIMENSION | TOLERANCE |
|----------------|---|-------------------|-----------|
| "A"            | TOP OF METAL SUBSTRATE TO TOP OF GLASS  | 0.94              | ±0.13     |
| "B"            | EMITTING AREA TO TOP OF GLASS           | 0.67              | ± 0.16    |
| "C"            | TOP OF METAL SUBSTRATE TO EMITTING AREA | 0.27              | ± 0.05    |

DWG-001703

Notes:

- 1) Red, Green and Blue PT39 Big Chip LEDs are individually assembled into a common anode copper core-board with a footprint of 26.5 mm x 16 mm.
- 2) Dimensions above are for information only. Please refer to the latest revision of the DWG- 001703 package outline mechanical specifications. (For legacy coreboard with interconnect clip, please see DWG-001263)
- 3) Connector- MOLEX Part Number: 874380843 or Global Part Number: WTB16-0815F. Please refer to DWG-001703 for pin-out information

### Mechanical Dimensions – Rotated Die Configuration

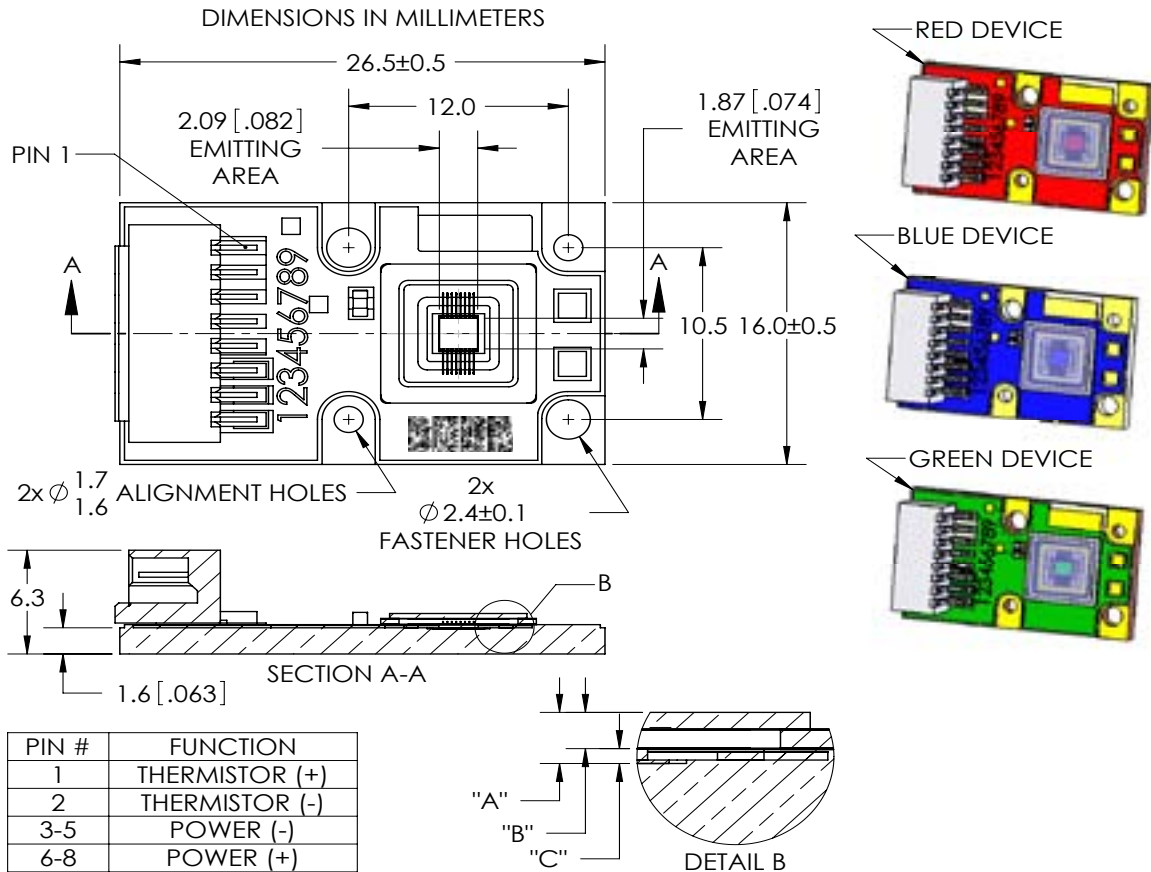



| DIMENSION NAME | DESCRIPTION                             | NOMINAL DIMENSION | TOLERANCE |
|----------------|---|-------------------|-----------|
| "A"            | TOP OF METAL SUBSTRATE TO TOP OF GLASS  | 0.94              | ±0.13     |
| "B"            | EMITTING AREA TO TOP OF GLASS           | 0.67              | ± 0.16    |
| "C"            | TOP OF METAL SUBSTRATE TO EMITTING AREA | 0.27              | ± 0.05    |

DWG-001705

- Notes:
- 1) Red, Green and Blue PT39 Big Chip LEDs are individually assembled into a common anode copper core-board with a footprint of 26.5 mm x 16 mm.
  - 2) Dimensions above are for information only. Refer to the latest revision of the DWG- 001705, package outline mechanical specifications (For legacy coreboard with interconnect clip, please see DWG-001471)
  - 3) Connector- MOLEX Part Number: 874380843 or Global Part Number: WTB16-0815F. Please refer to DWG-001705 for pin-out information



### Shipping Tray Outline

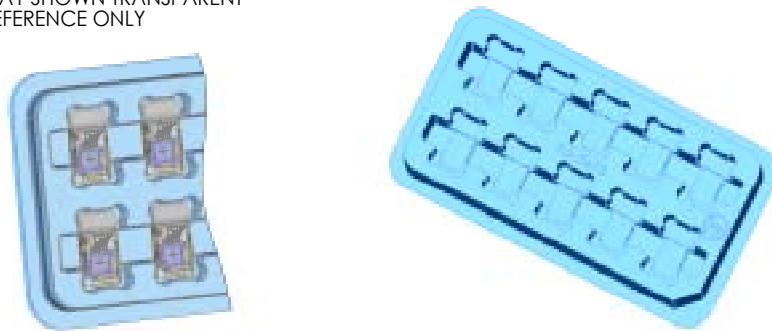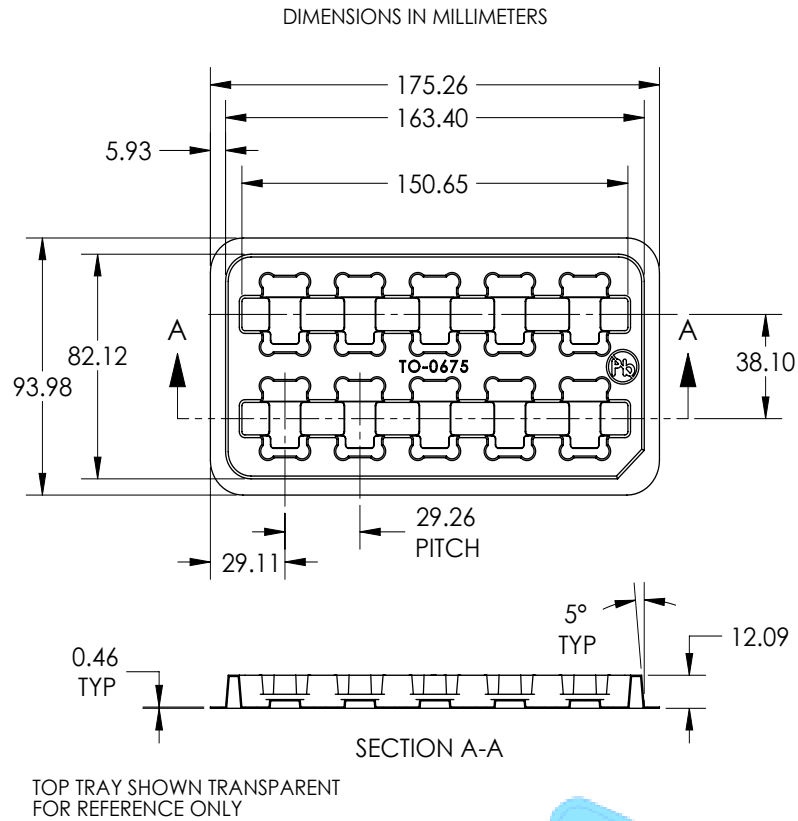

For detailed drawing of shipping trays, please refer to document TO-0675 , available upon request.

## Packing and Shipping Specifications

### Packing Specification

| Packing Configuration   | Qty /Pack | Reel Dimensions (diameter x W, mm) | Gross Weight (kg) |
|---|-----------|------------------------------------|-------------------|
| Stack of 5 trays with 10 devices per tray<br>Each pack is enclosed in ESD bag | 50        | 95 x 176 x 50                      | 0.45              |

### Product Label Specification

#### Label Fields:

- 6-8 digit Box number (for Luminus internal use)
- Luminus ordering part number
- Quantity of devices in pack
- Part number revision (for Luminus internal use)
- Customer’s part number (optional)
- Flux Bin
- 2D Bar code



Sample label –for illustration only

### Shipping Box

| Shipping Box | Quantity    | Material | Dimensions (L x W x H, mm) |
|--------------|-------------|----------|----------------------------|
| Carton Box   | 1 -20 packs | S4651    | 560 x 560 x 200            |

### History of Changes

| Rev | Date     | Description of Change  |
|-----|----------|--|
| 01  | 01/05/09 | Preliminary Specifications   |
| 02  | 07/28/09 | Add die rotated configuration ordering part numbers and supporting information   |
| 03  | 09/09/09 | Update thermal coefficients and dynamic resistance values  |
| 04  | 03/01/10 | Add EP-Blue specifications and ordering part numbers   |
| 05  | 08/03/10 | Add MPC-Green specifications and ordering part numbers   |
| 06  | 01/11/11 | Add bin definitions for Red, Green, Blue Bin Kits  |
| 07  | 04/12/11 | Updated luminous flux and optical power specifications per test calibration update   |
| 08  | 01/27/12 | Update mechanical drawings with shunt-less coreboard configurations;<br>Add Red -Amber (615nm) preliminary product specifications;<br>Implement new logo/datasheet template; |

The products, their specifications and other information appearing in this document are subject to change by Luminus Devices without notice. Luminus Devices assumes no liability for errors that may appear in this document, and no liability otherwise arising from the application or use of the product or information contained herein. None of the information provided herein should be considered to be a representation of the fitness or suitability of the product for any particular application or as any other form of warranty. Luminus Devices' product warranties are limited to only such warranties as accompany a purchase contract or purchase order for such products. Nothing herein is to be construed as constituting an additional warranty. No information contained in this publication may be considered as a waiver by Luminus Devices of any intellectual property rights that Luminus Devices may have in such information. Big Chip LEDs™ is a registered trademark of Luminus Devices, Inc., all rights reserved.

This product is protected by U.S. Patents 6,831,302; 7,074,631; 7,083,993; 7,084,434; 7,098,589; 7,105,861; 7,138,666; 7,166,870; 7,166,871; 7,170,100; 7,196,354; 7,211,831; 7,262,550; 7,274,043; 7,301,271; 7,341,880; 7,344,903; 7,345,416; 7,348,603; 7,388,233; 7,391,059 Patents Pending in the U.S. and other countries.