



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






PTFA261301E
PTFA261301F
green
 Product

Thermally-Enhanced High Power RF LDMOS FETs 130 W, 2.62 – 2.68 GHz



Description

The PTFA261301E and PTFA261301F are thermally-enhanced 130-watt, internally-matched *GOLDMOS*® FETs intended for ultra-linear applications. They are characterized for CDMA, CDMA2000, Super3G (3GPP TSG RAN), and WiMAX operation from 2620 to 2680 MHz. Full gold metallization ensures excellent device lifetime and reliability.

PTFA261301E
 Package H-30260-2



PTFA261301F
 Package H-31260-2

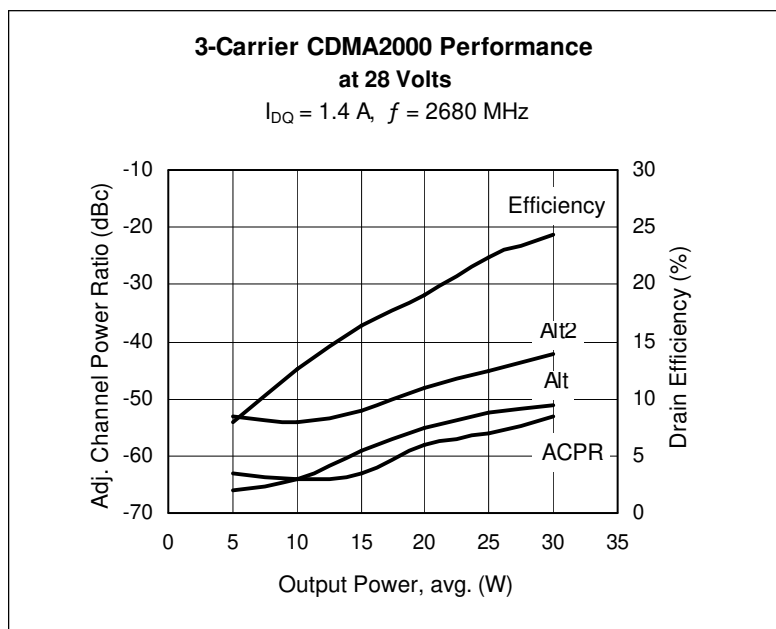

Features

- Thermally-enhanced, Pb-free packages, RoHS-compliant
- Broadband internal matching
- Typical CDMA performance at 2.68 GHz
 - Average output power = 26 W
 - Linear Gain = 13 dB
 - Efficiency = 24%
- Typical CW performance, 2680 MHz, 28 V
 - Output power at P-1dB = 152 W
 - Efficiency = 47%
- Integrated ESD protection: Human Body Model, Class 2 (minimum)
- Excellent thermal stability, low HCI drift
- Capable of handling 10:1 VSWR @ 28 V, 130 W (CW) output power

RF Performance

CDMA IS-95 Measurements (not subject to production test—verified by design/characterization in Infineon test fixture)

$V_{DD} = 28 \text{ V}$, $I_{DQ} = 1.4 \text{ A}$, $P_{OUT} = 26 \text{ W}$ average, $f = 2680 \text{ MHz}$

Characteristic	Symbol	Min	Typ	Max	Unit
Adjacent Channel Power Ratio	ACPR	—	-45	—	dBc
Gain	G_{ps}	—	13	—	dB
Drain Efficiency	η_D	—	24	—	%

All published data at $T_{CASE} = 25^\circ\text{C}$ unless otherwise indicated

ESD: Electrostatic discharge sensitive device—observe handling precautions!

RF Performance (cont.)

Two-tone Measurements (tested in Infineon test fixture)

$V_{DD} = 28\text{ V}$, $I_{DQ} = 1.4\text{ A}$, $P_{OUT} = 130\text{ W PEP}$, $f = 2680\text{ MHz}$, tone spacing = 1 MHz

Characteristic	Symbol	Min	Typ	Max	Unit
Gain	G_{ps}	12.5	13.5	—	dB
Drain Efficiency	η_D	34.5	36	—	%
Intermodulation Distortion	IMD	—	-28.5	-27	dBc

DC Characteristics

Characteristic	Conditions	Symbol	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$V_{GS} = 0\text{ V}$, $I_{DS} = 10\text{ mA}$	$V_{(BR)DSS}$	65	—	—	V
Drain Leakage Current	$V_{DS} = 28\text{ V}$, $V_{GS} = 0\text{ V}$	I_{DSS}	—	—	1.0	μA
	$V_{DS} = 63\text{ V}$, $V_{GS} = 0\text{ V}$	I_{DSS}	—	—	10.0	μA
On-State Resistance	$V_{GS} = 10\text{ V}$, $V_{DS} = 0.1\text{ V}$	$R_{DS(on)}$	—	0.07	—	Ω
Operating Gate Voltage	$V_{DS} = 28\text{ V}$, $I_{DQ} = 1.4\text{ A}$	V_{GS}	2.0	2.4	3.0	V
Gate Leakage Current	$V_{GS} = 10\text{ V}$, $V_{DS} = 0\text{ V}$	I_{GSS}	—	—	1.0	μA





Maximum Ratings

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DSS}	65	V
Gate-Source Voltage	V_{GS}	-0.5 to +12	V
Junction Temperature	T_J	200	$^{\circ}\text{C}$
Total Device Dissipation	P_D	449	W
		Above 25 $^{\circ}\text{C}$ derate by	2.56
Storage Temperature Range	T_{STG}	-40 to +150	$^{\circ}\text{C}$
Thermal Resistance ($T_{CASE} = 70^{\circ}\text{C}$, 130 W CW)	$R_{\theta JC}$	0.39	$^{\circ}\text{C/W}$





Ordering Information

Type	Package Outline	Package Description	Marking
PTFA261301E	H-30260-2	Thermally-enhanced slotted flange, single-ended	PTFA261301E
PTFA261301F	H-31260-2	Thermally-enhanced earless flange, single-ended	PTFA261301F





Typical Performance (data taken in a production test fixture)

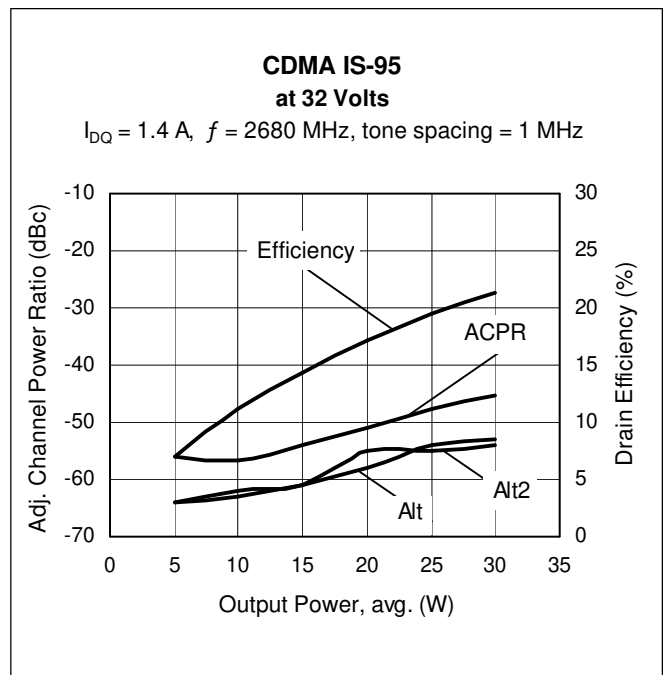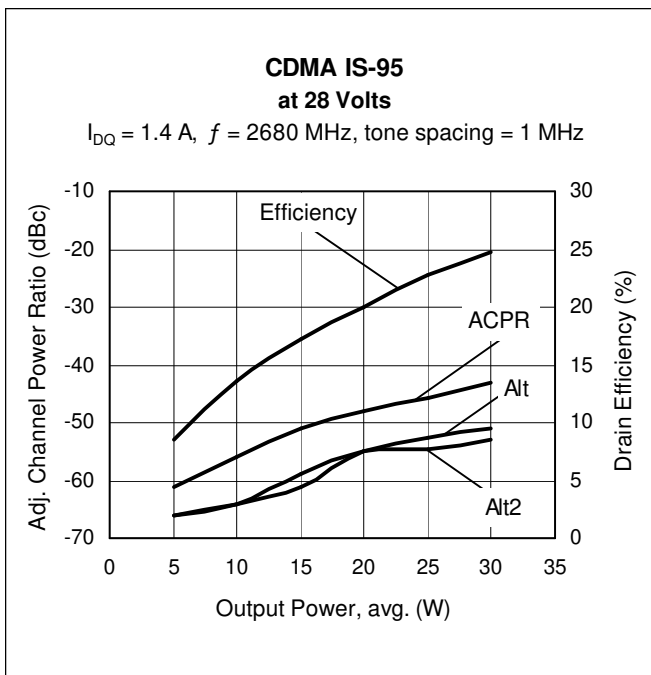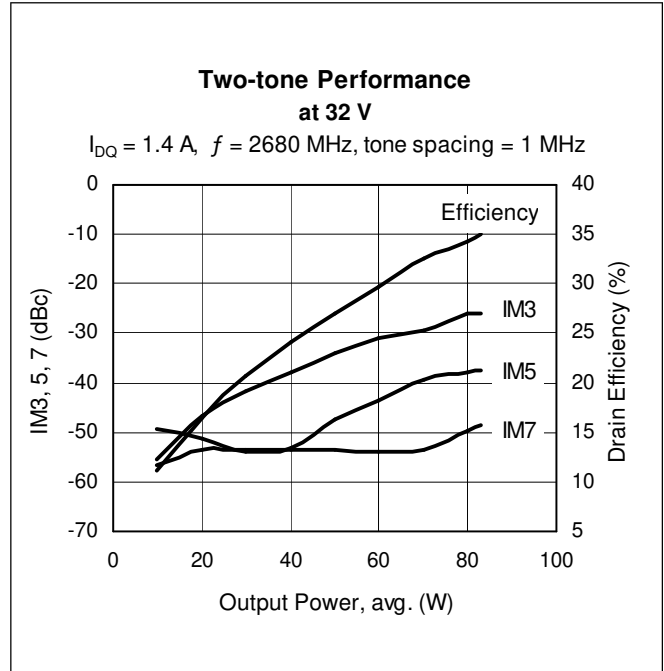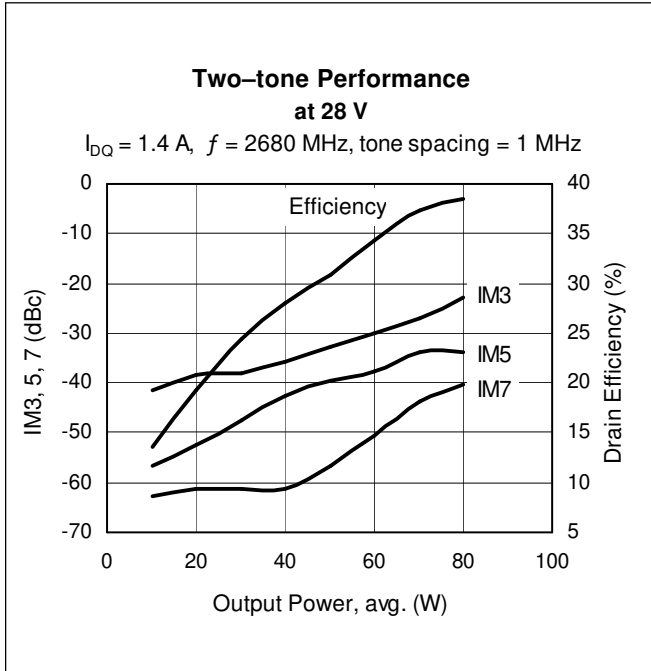





Typical Performance (cont.)

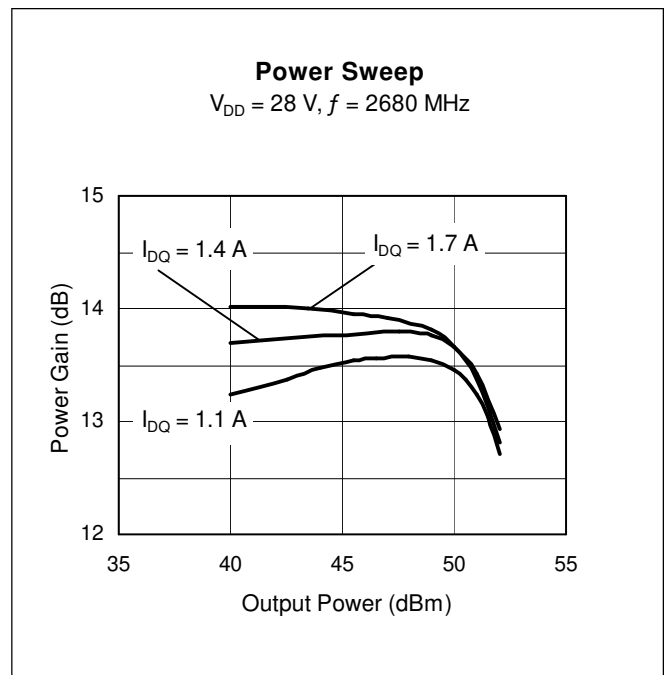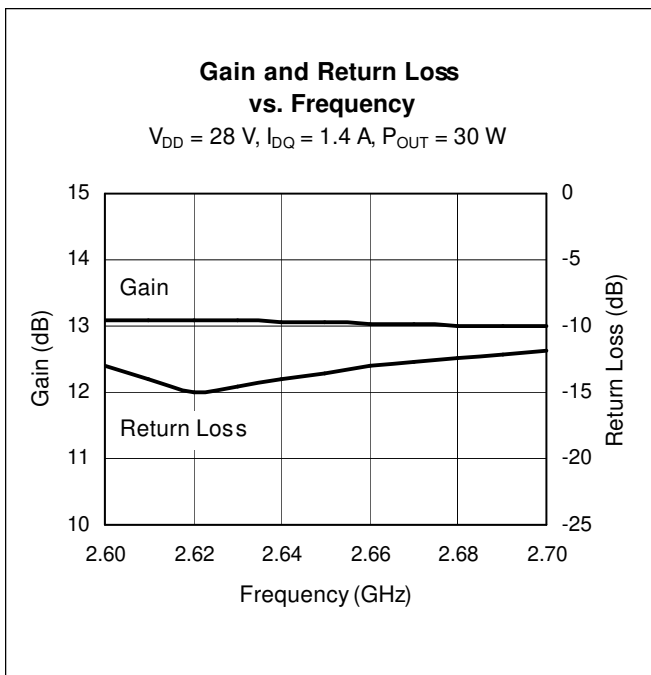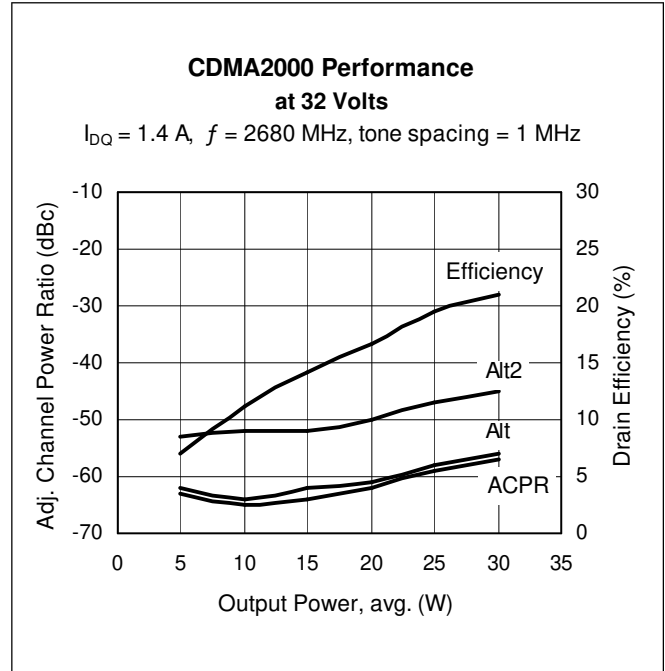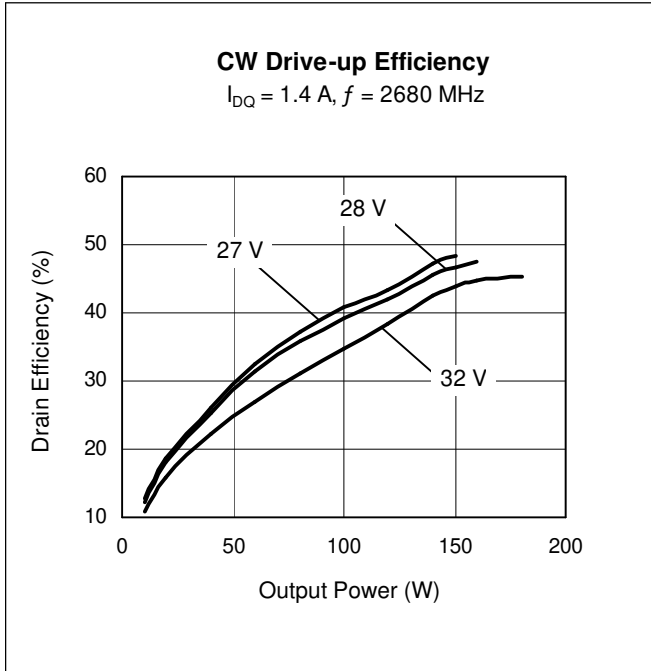


Typical Performance (cont.)

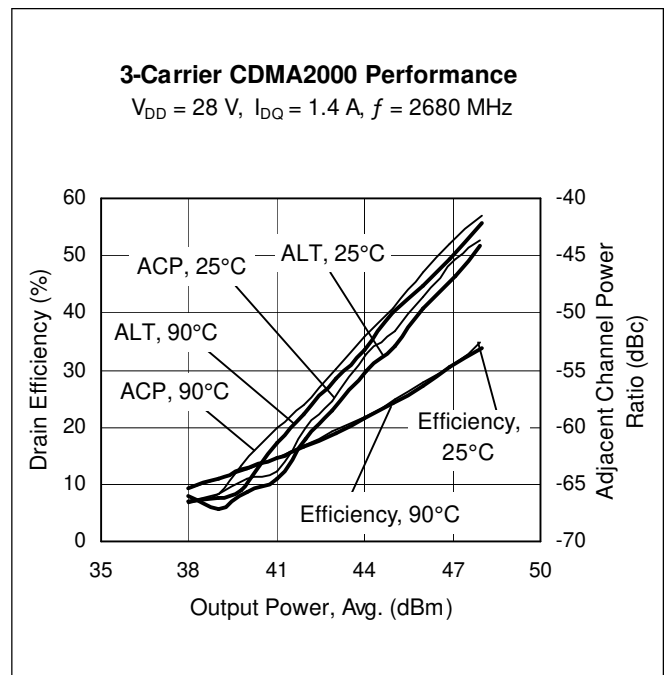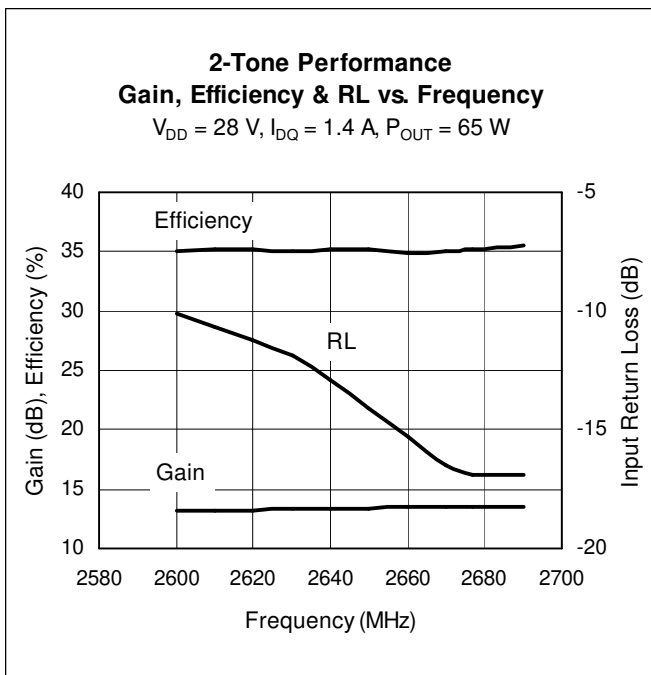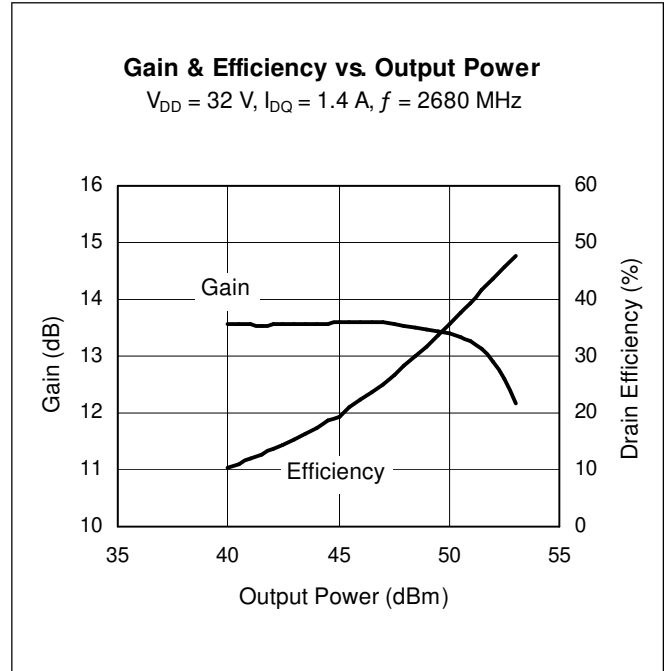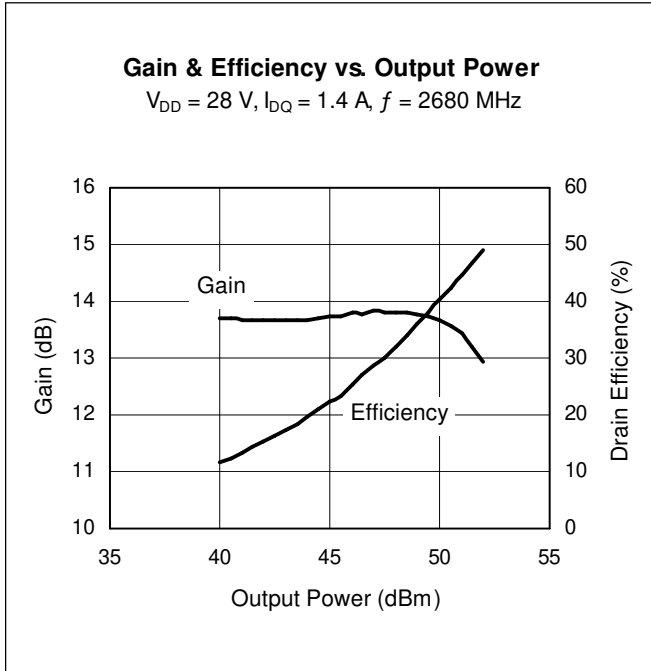


Typical Performance (cont.)

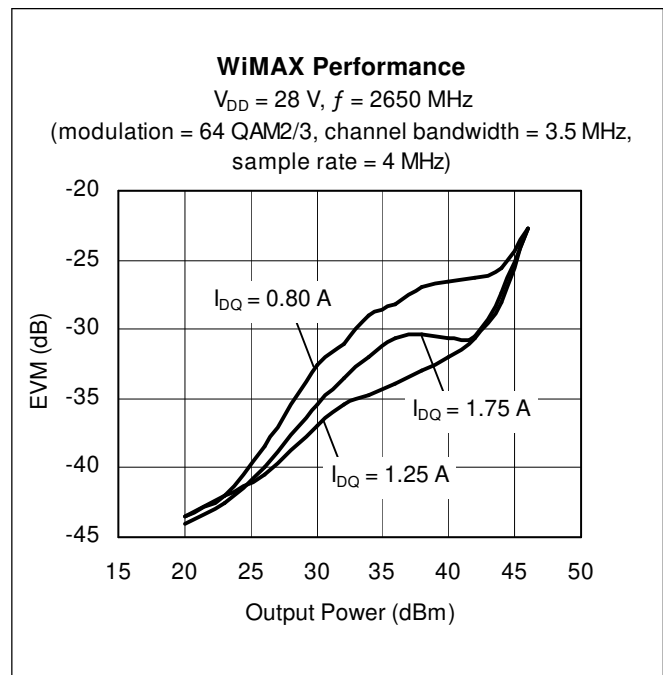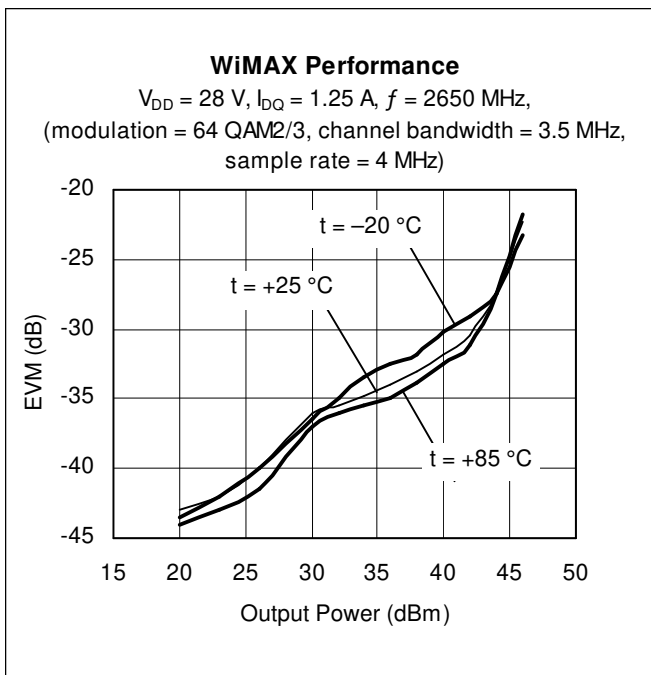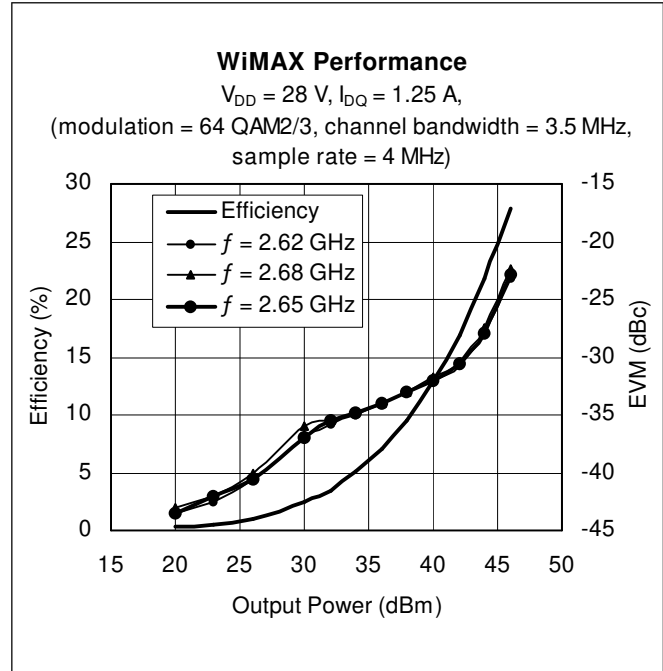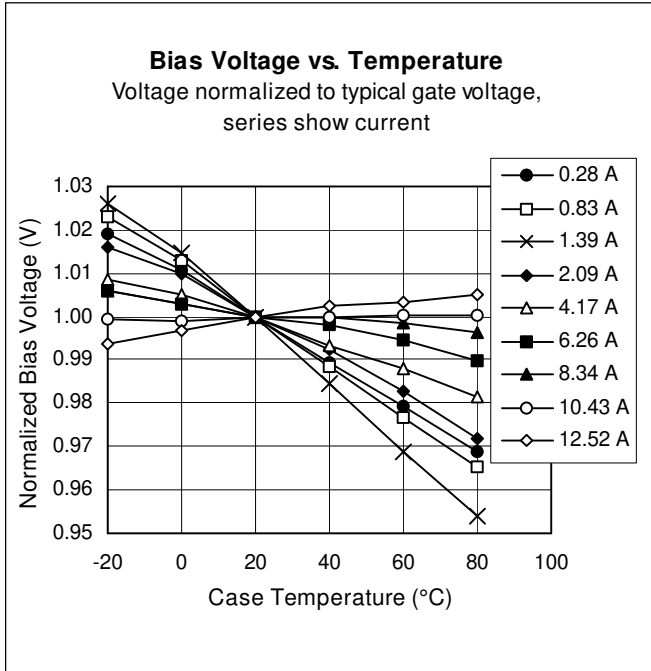

Broadband Circuit Impedance

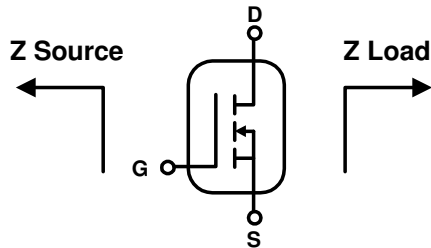


Frequency MHz	Z Source W		Z Load W	
	R	jX	R	jX
2590	6.7	0.45	1.6	-2.7
2620	5.8	-0.1	1.5	-2.8
2650	5.8	0.4	1.4	-3.0
2680	6.3	0.3	1.5	-3.4
2710	5.4	0.3	1.3	-3.7

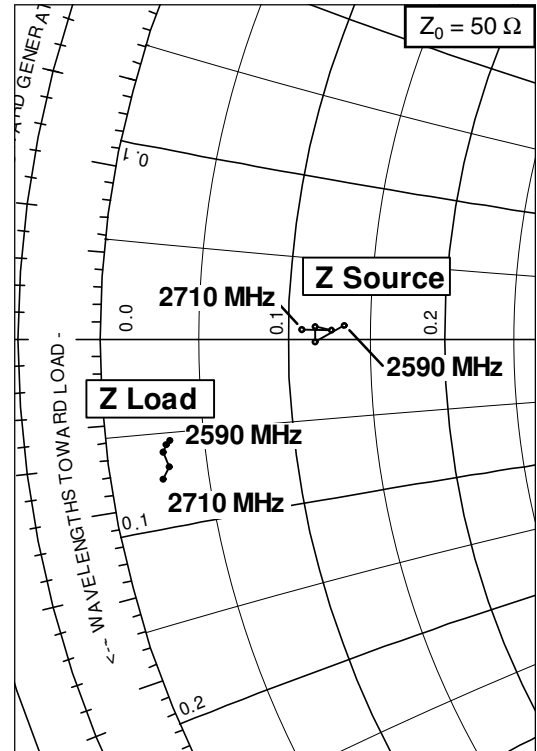

See next page for circuit information

Reference Circuit

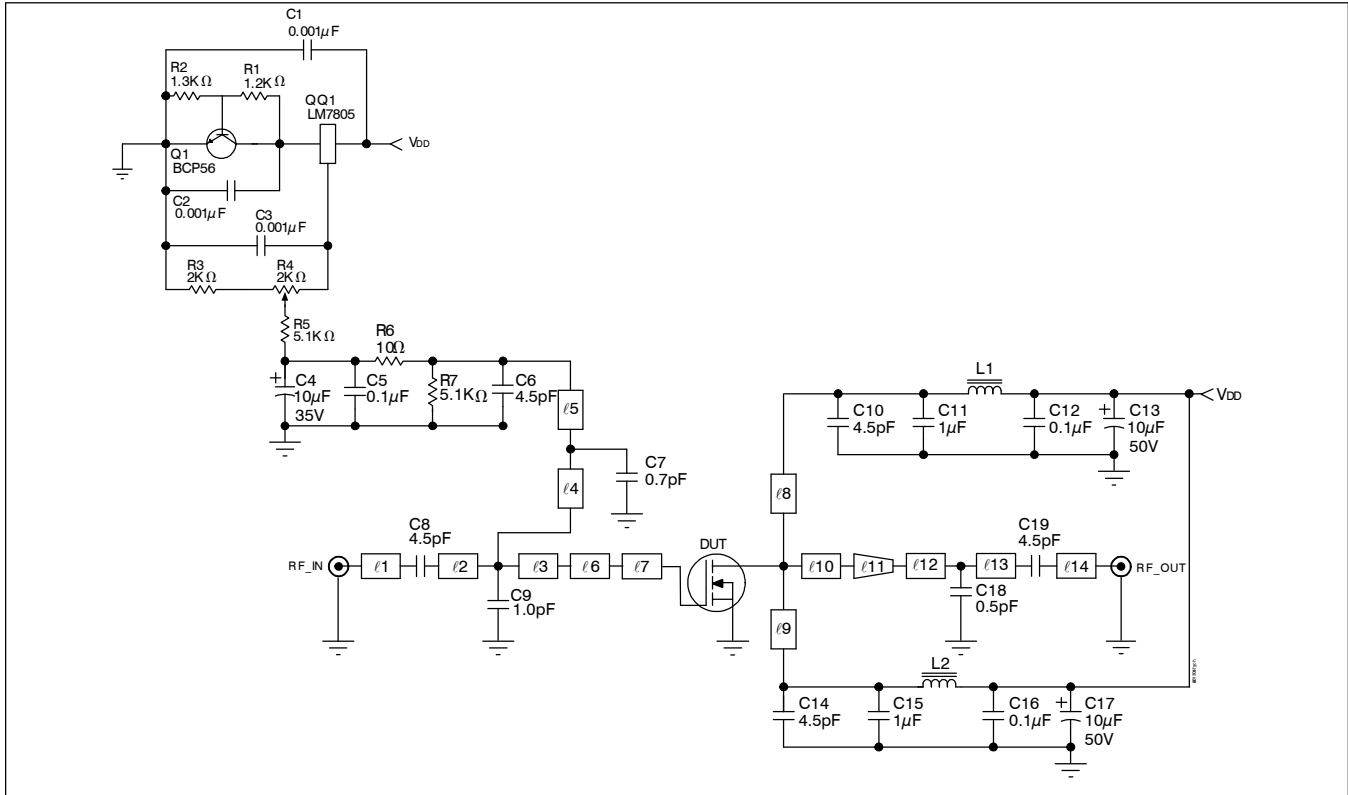

Reference circuit schematic for $f = 2680 \text{ MHz}$


Circuit Assembly Information

DUT	PTFA261301E or PTFA261301F	LDMOS Transistor	
PCB	0.76 mm [.030"] thick, $\epsilon_r = 4.5$	Rogers TMM4	2 oz. copper

Microstrip	Electrical Characteristics at 2680 MHz ¹	Dimensions: L x W (mm)	Dimensions: L x W (in.)
l_1	0.123λ , 50.0 Ω	7.47 x 1.47	0.294 x 0.058
l_2	0.137λ , 41.3 Ω	8.18 x 1.91	0.322 x 0.075
l_3	0.018λ , 41.3 Ω	1.09 x 1.91	0.043 x 0.075
l_4	0.080λ , 59.0 Ω	4.95 x 1.02	0.195 x 0.040
l_5	0.265λ , 59.0 Ω	16.33 x 1.02	0.643 x 0.040
l_6	0.022λ , 14.7 Ω	1.22 x 7.62	0.048 x 0.300
l_7	0.090λ , 8.0 Ω	4.88 x 15.24	0.192 x 0.600
l_8, l_9	0.250λ , 55.0 Ω	15.37 x 1.17	0.605 x 0.046
l_{10}	0.056λ , 4.8 Ω	3.35 x 29.85	0.132 x 1.175
l_{11} (taper)	0.117λ , 4.8 Ω / 50.0 Ω	6.35 x 29.85 / 1.42	0.250 x 1.175 / 0.056
l_{12}	0.036λ , 50.0 Ω	2.16 x 1.42	0.085 x 0.056
l_{13}	0.113λ , 50.0 Ω	6.86 x 1.42	0.270 x 0.056
l_{14}	0.057λ , 50.0 Ω	3.48 x 1.42	0.137 x 0.056

¹Electrical characteristics are rounded.

Reference Circuit (cont.)

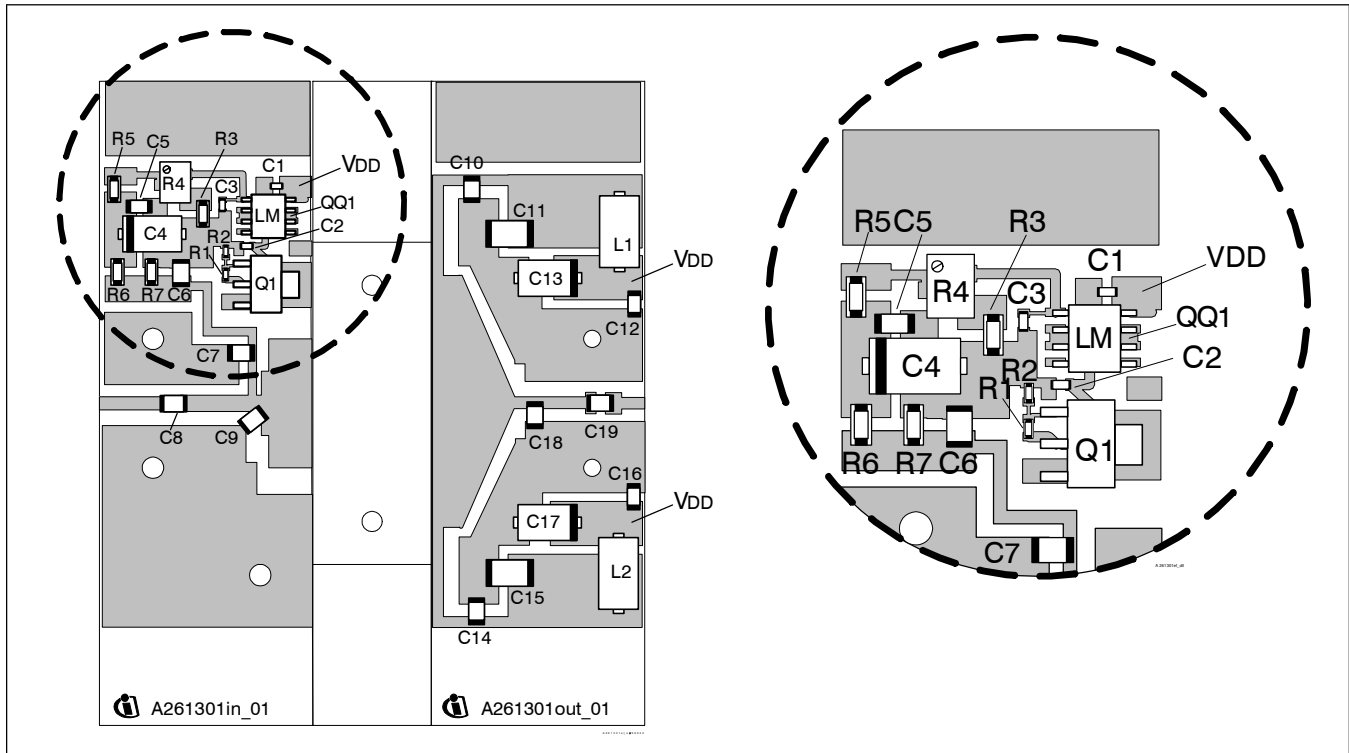


Reference circuit assembly diagram (not to scale)*

Component	Description	Suggested Supplier	P/N or Comment
C1, C2, C3	Capacitor, 0.001 μ F	Digi-Key	PCC1772CT-ND
C4	Tantalum capacitor, 10 μ F, 35 V	Digi-Key	366-1655-2-ND
C5, C12, C16	Capacitor, 0.1 μ F	Digi-Key	PCC104BCT-ND
C6, C8, C10, C14, C19	Ceramic capacitor, 4.5 pF	ATC	100B 4R5
C7	Ceramic capacitor, 0.7 pF	ATC	100B 0R7
C9	Ceramic capacitor, 1.0 pF	ATC	100B 1R0
C11, C15	Capacitor, 1.0 μ F	Toshiba	C4532XTRZA105M
C13, C17	Tantalum capacitor, 10 μ F, 50 V	Garrett Electronics	TPS106K050R0400
C18	Ceramic capacitor, 0.5 pF	ATC	100B 0R5
L1, L2	Ferrite, 8.9 mm	Elna Magnetics	BDS 4.6/3/8.9-4S2
Q1	Transistor	Infineon Technologies	BCP56
QQ1	Voltage regulator	National Semiconductor	LM7805
R1	Chip resistor, 1.2 k-ohms	Digi-Key	P1.2KGCT-ND
R2	Chip resistor, 1.3 k-ohms	Digi-Key	P1.3KGCT-ND
R3	Chip resistor, 2 k-ohms	Digi-Key	P2KECT-ND
R4	Potentiometer, 2 k-ohms	Digi-Key	3224W-202ETR-ND
R5, R7	Chip resistor, 5.1 k-ohms	Digi-Key	P5.1KECT-ND
R6	Chip resistor, 10 ohms	Digi-Key	P10ECT-ND


*Gerber Files for this circuit available on request

Package Outline Specifications

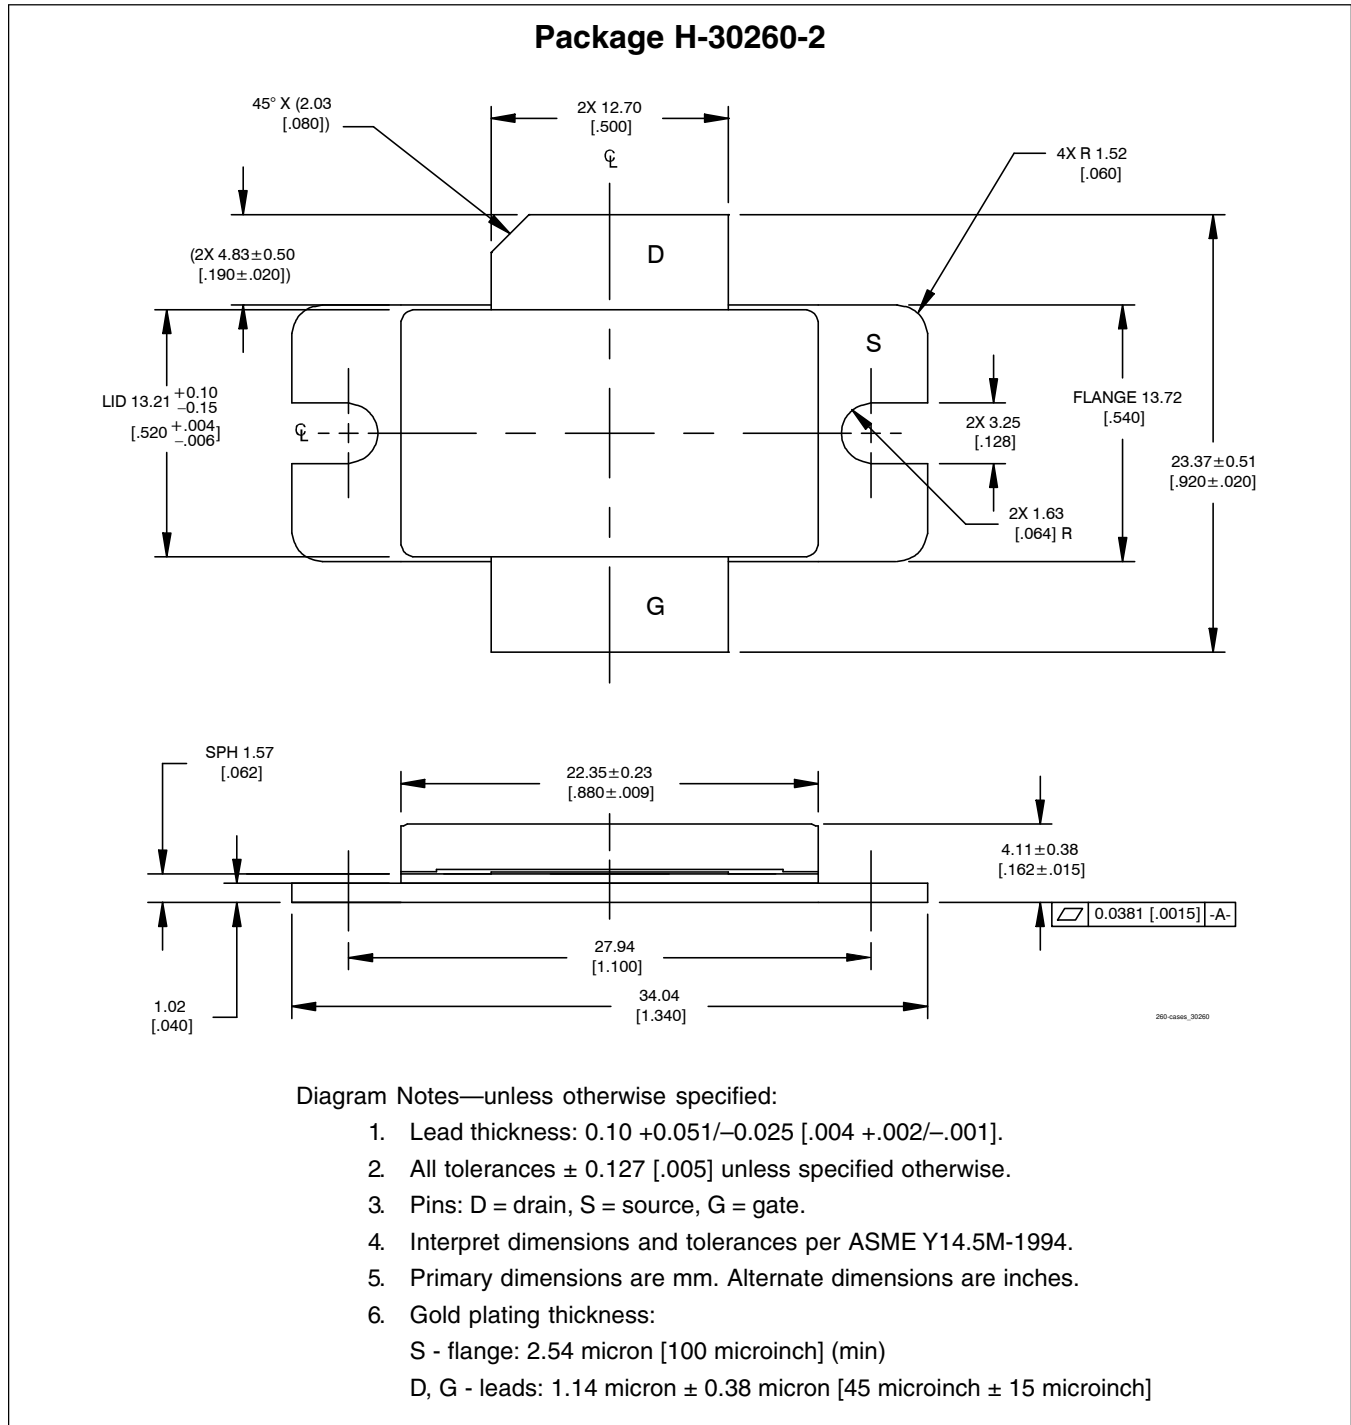

Find the latest and most complete information about products and packaging at the Infineon Internet page
<http://www.infineon.com/products>

Package Outline Specifications

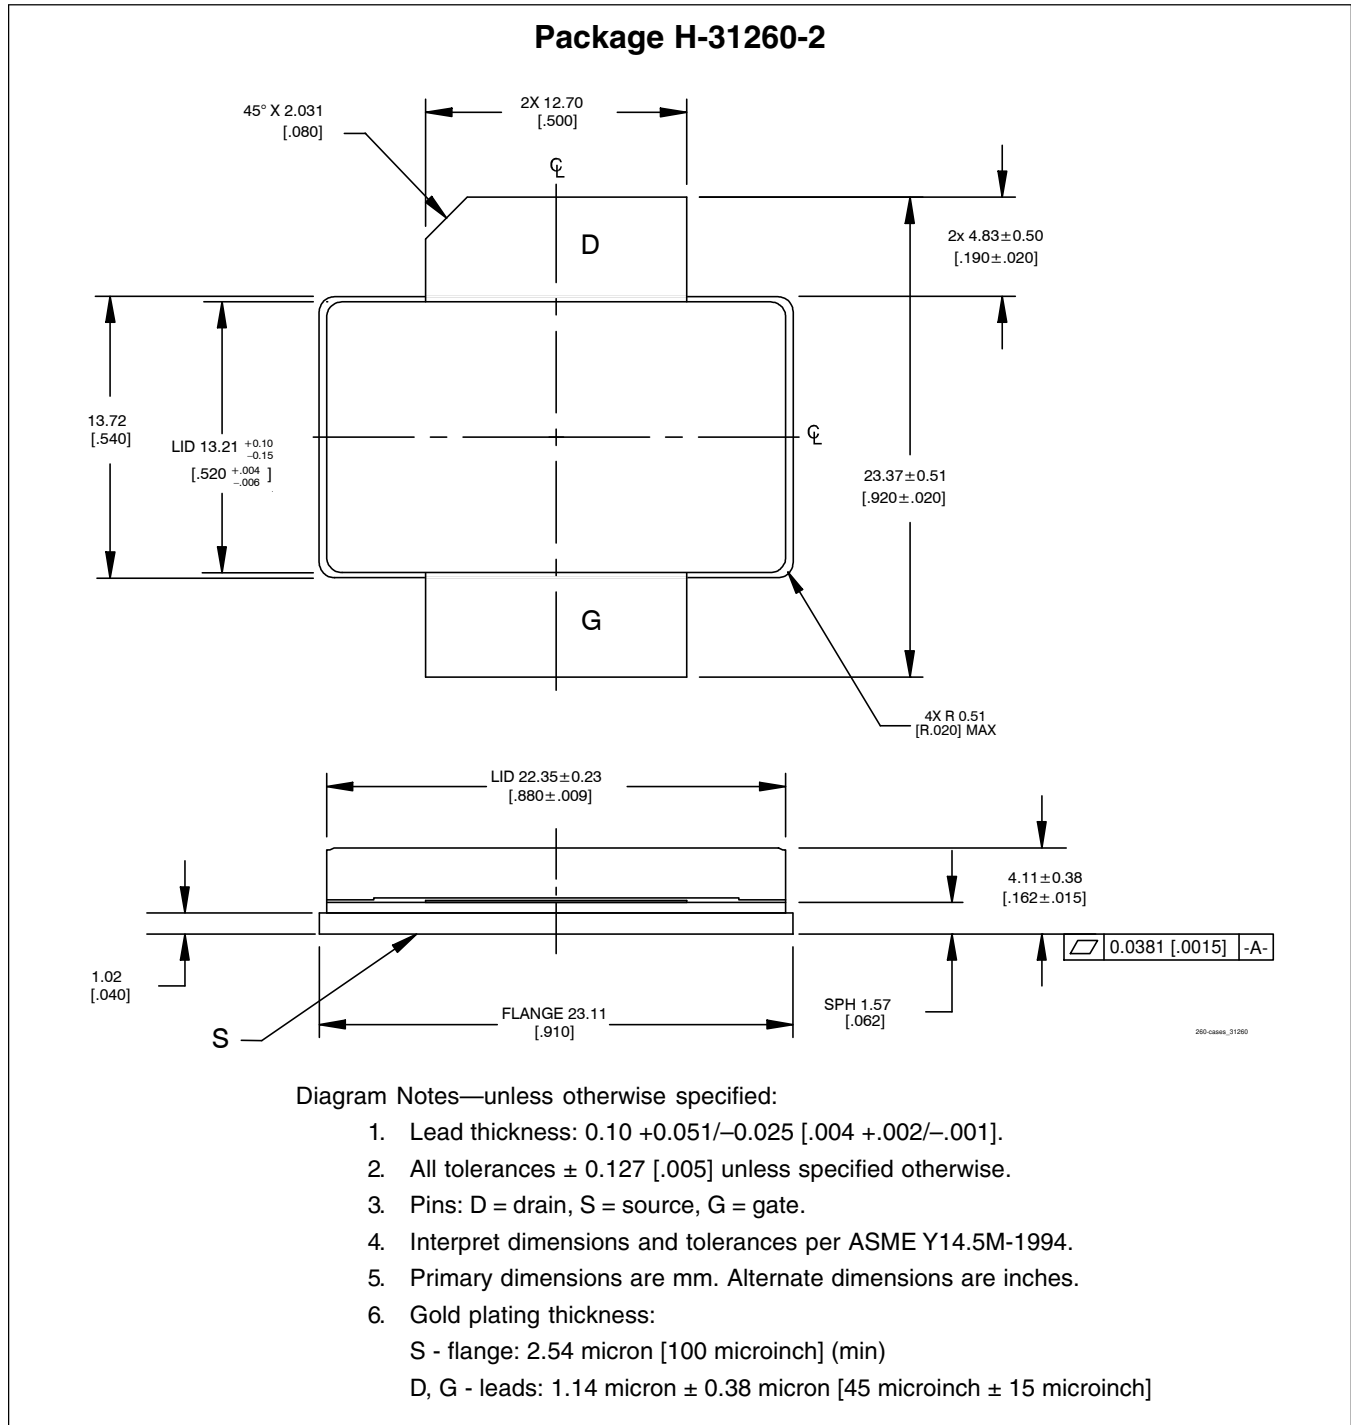

Find the latest and most complete information about products and packaging at the Infineon Internet page
<http://www.infineon.com/products>


Page	Subjects (major changes since last revision)
10, 11	Correct package outline information.

We Listen to Your Comments

Any information within this document that you feel is wrong, unclear or missing at all?
Your feedback will help us to continuously improve the quality of this document.
Please send your proposal (including a reference to this document) to:

highpowerRF@infineon.com

To request other information, contact us at:
+1 877 465 3667 (1-877-GO-LDMOS) USA
or +1 408 776 0600 International



GOLDMOS® is a registered trademark of Infineon Technologies AG.

Edition 2007-04-04

Published by
Infineon Technologies AG
81726 München, Germany

© Infineon Technologies AG 2004.
All Rights Reserved.

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics (“Beschaffungsgarantie”). With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (www.infineon.com/rfpower).

Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.