

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PART NUMBE	PART NUMBER			DIMENSIONS in.						
PREFIX	PK	SIZE	A ±.03	_B C ± .015,	.낡 ± ºº၊ (.	эM ±.03	_B W ± °01,.			
PV18-6FFB	-3K	#6	_80 (20_3)	.19 (4.8)	.15 (3.8)	.64 (16.3)	.28 (7.1)			
PV18-8FFB	-3K	#8	_87 (22_1)	.23 (5.8)	.17 (4.3)	.68 (17.3)	.31 (7.9)			
PV18-10FFB	-3K	• 10	_86 (21_8)	.23 (5.8)	.20 (5.1)	.68 (17.3)	.35 (8.9)			

NOTES:

1. USED FOR:

A. 600V MAX VOLTAGE RATING

B. 221°F (105°C) MAX TEMP RATING

C. 22-18 AWG (.5-1.5 mm²) SOLID OR STRANDED COPPER WIRE A

2. INSTALLATION TOOLS:

A. PRESSES : CP-851, CP-860, CP-861

B. APPLICATOR : CA-800 C. DIE INSERTS : CD-800-1

3. WIRE STRIP LENGTH: 1/4 *1/32.0 (6.4 *.8.0)

4. MAX WIRE INSULATION DIA: .150 (3.81)

5. MATERIAL:

A. TERMINAL STAMPING: .03 (.8) THK


TIN PLATED COPPER

B. HOUSING : RED VINYL

6. PACKAGING:

A. -3K = 3000 PCS (CONTINUOUSLY MOLDED ON REEL)

7. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS OR mm2

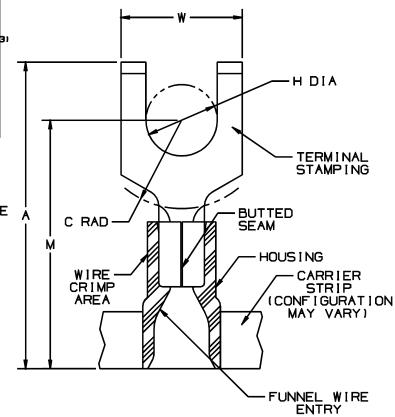



JL) (§

587H E52164 CERTIFIED LR31212

A41078_04

04	12/00	ED		FILESPEC WAS: N41078AA_PCD_03				CORP. TINLEY PARK, ILLINGIS		
03	5/93	ВК		UPDATED FORMAT	UPDATED FORMAT 01564 TINLEY PARK, ILL		CORP. TINLEY PARK, ILLINOIS			
02	10/92	DL	LM	PV18-10FFB-3K: A WAS .89 (22.61),		LA	KS	REELSMART™		
			-	W WAS .35 (8.89), FILESPEC WAS A41078A				TERMO 2PC CONTINUOUSLY MOLDED VINYL INSULATED, #22-18 BARREL, FLANGED FORKS		
REV	REV DATE BY CHK DESCRIPTION		ECN #	CUST	₽₩	FES FS FS NONE DRABING NO. A41078				